

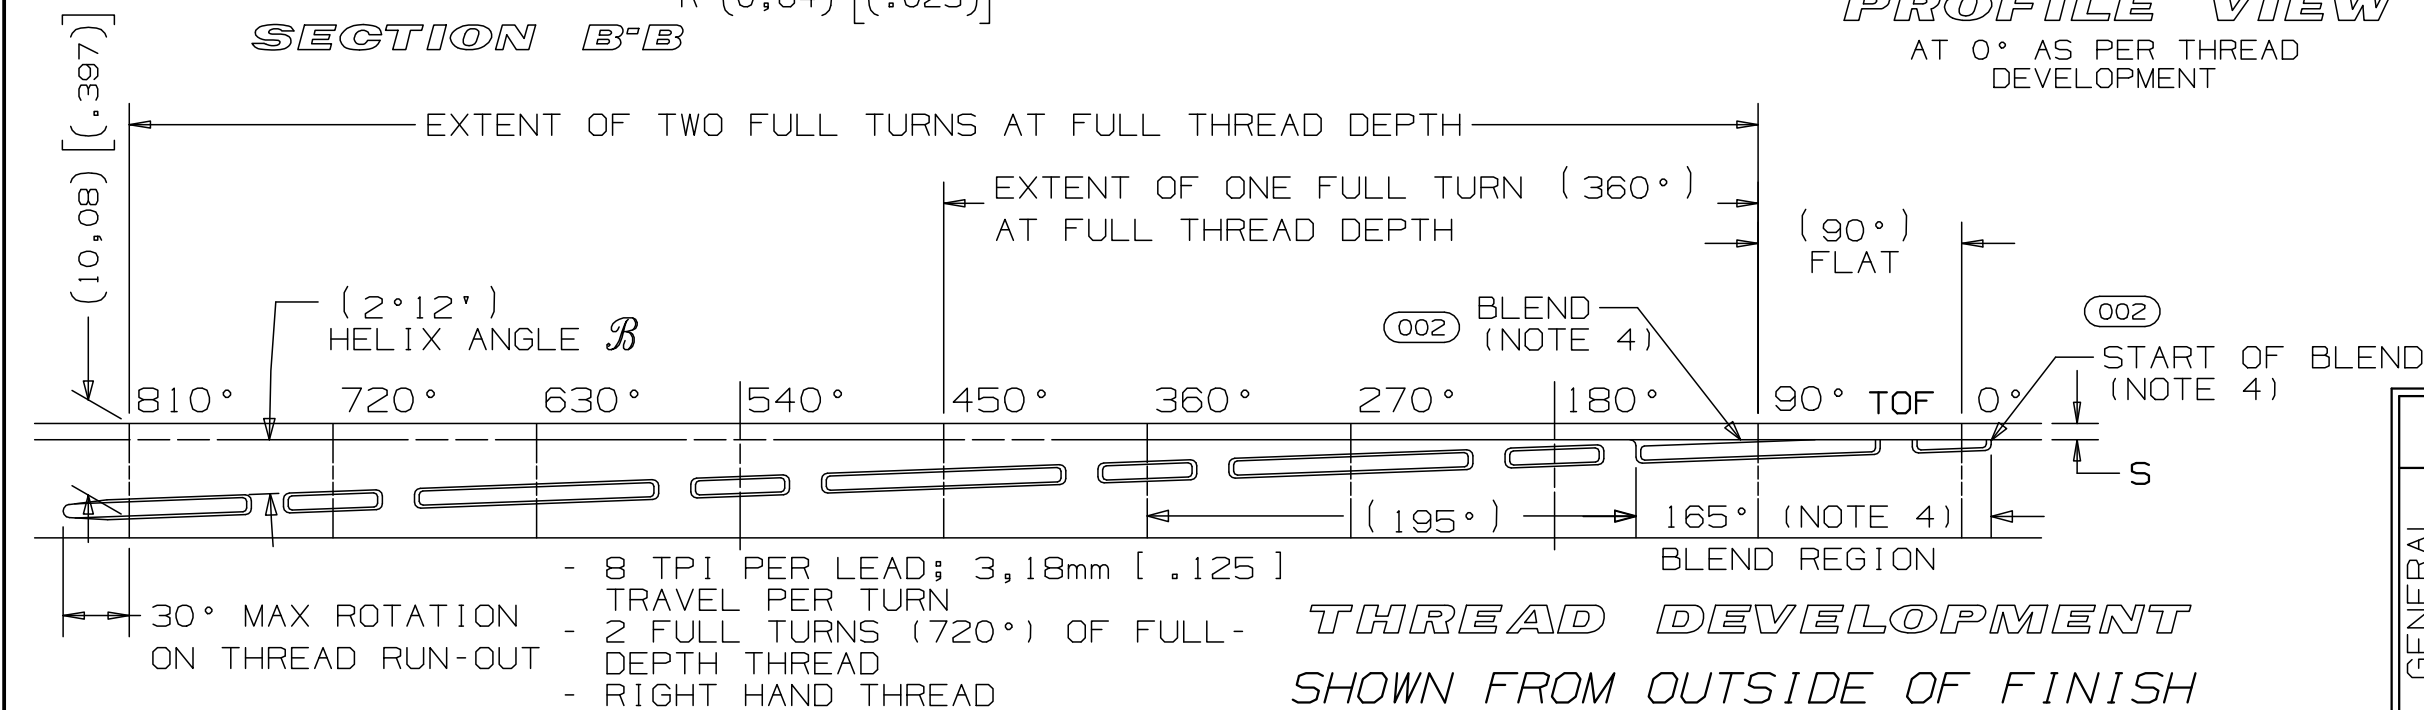
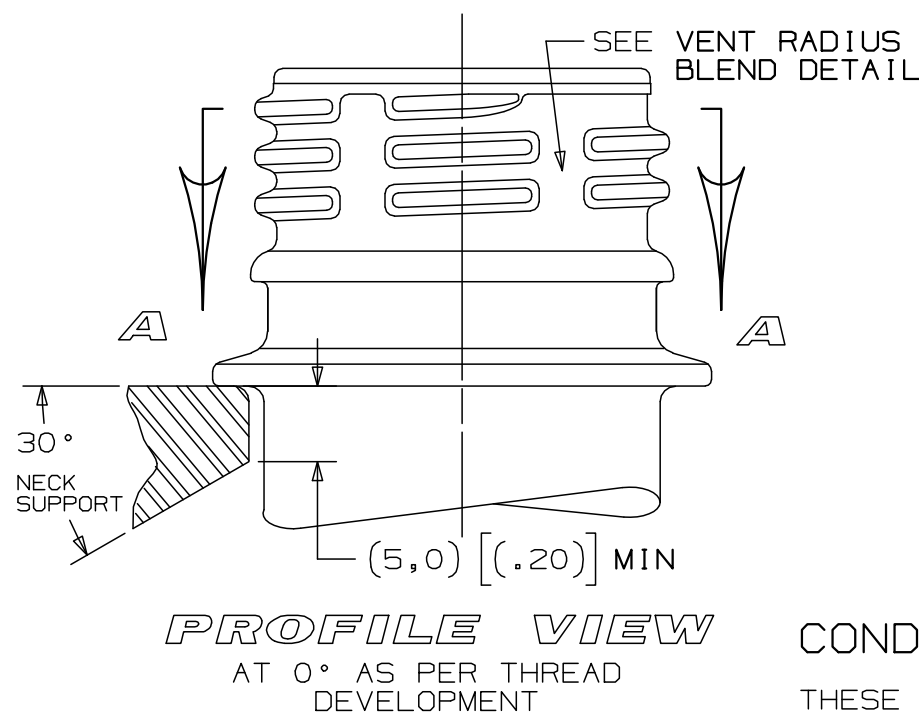
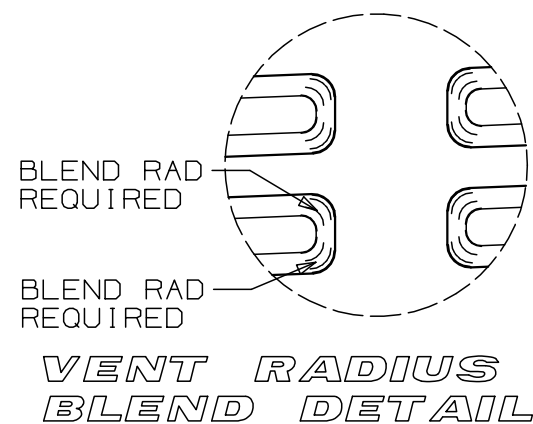
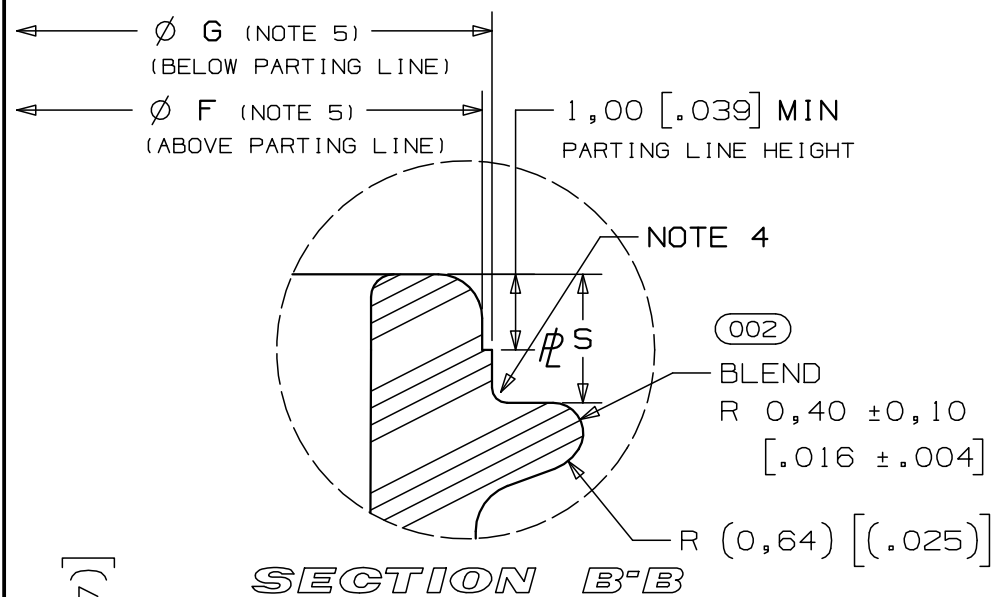


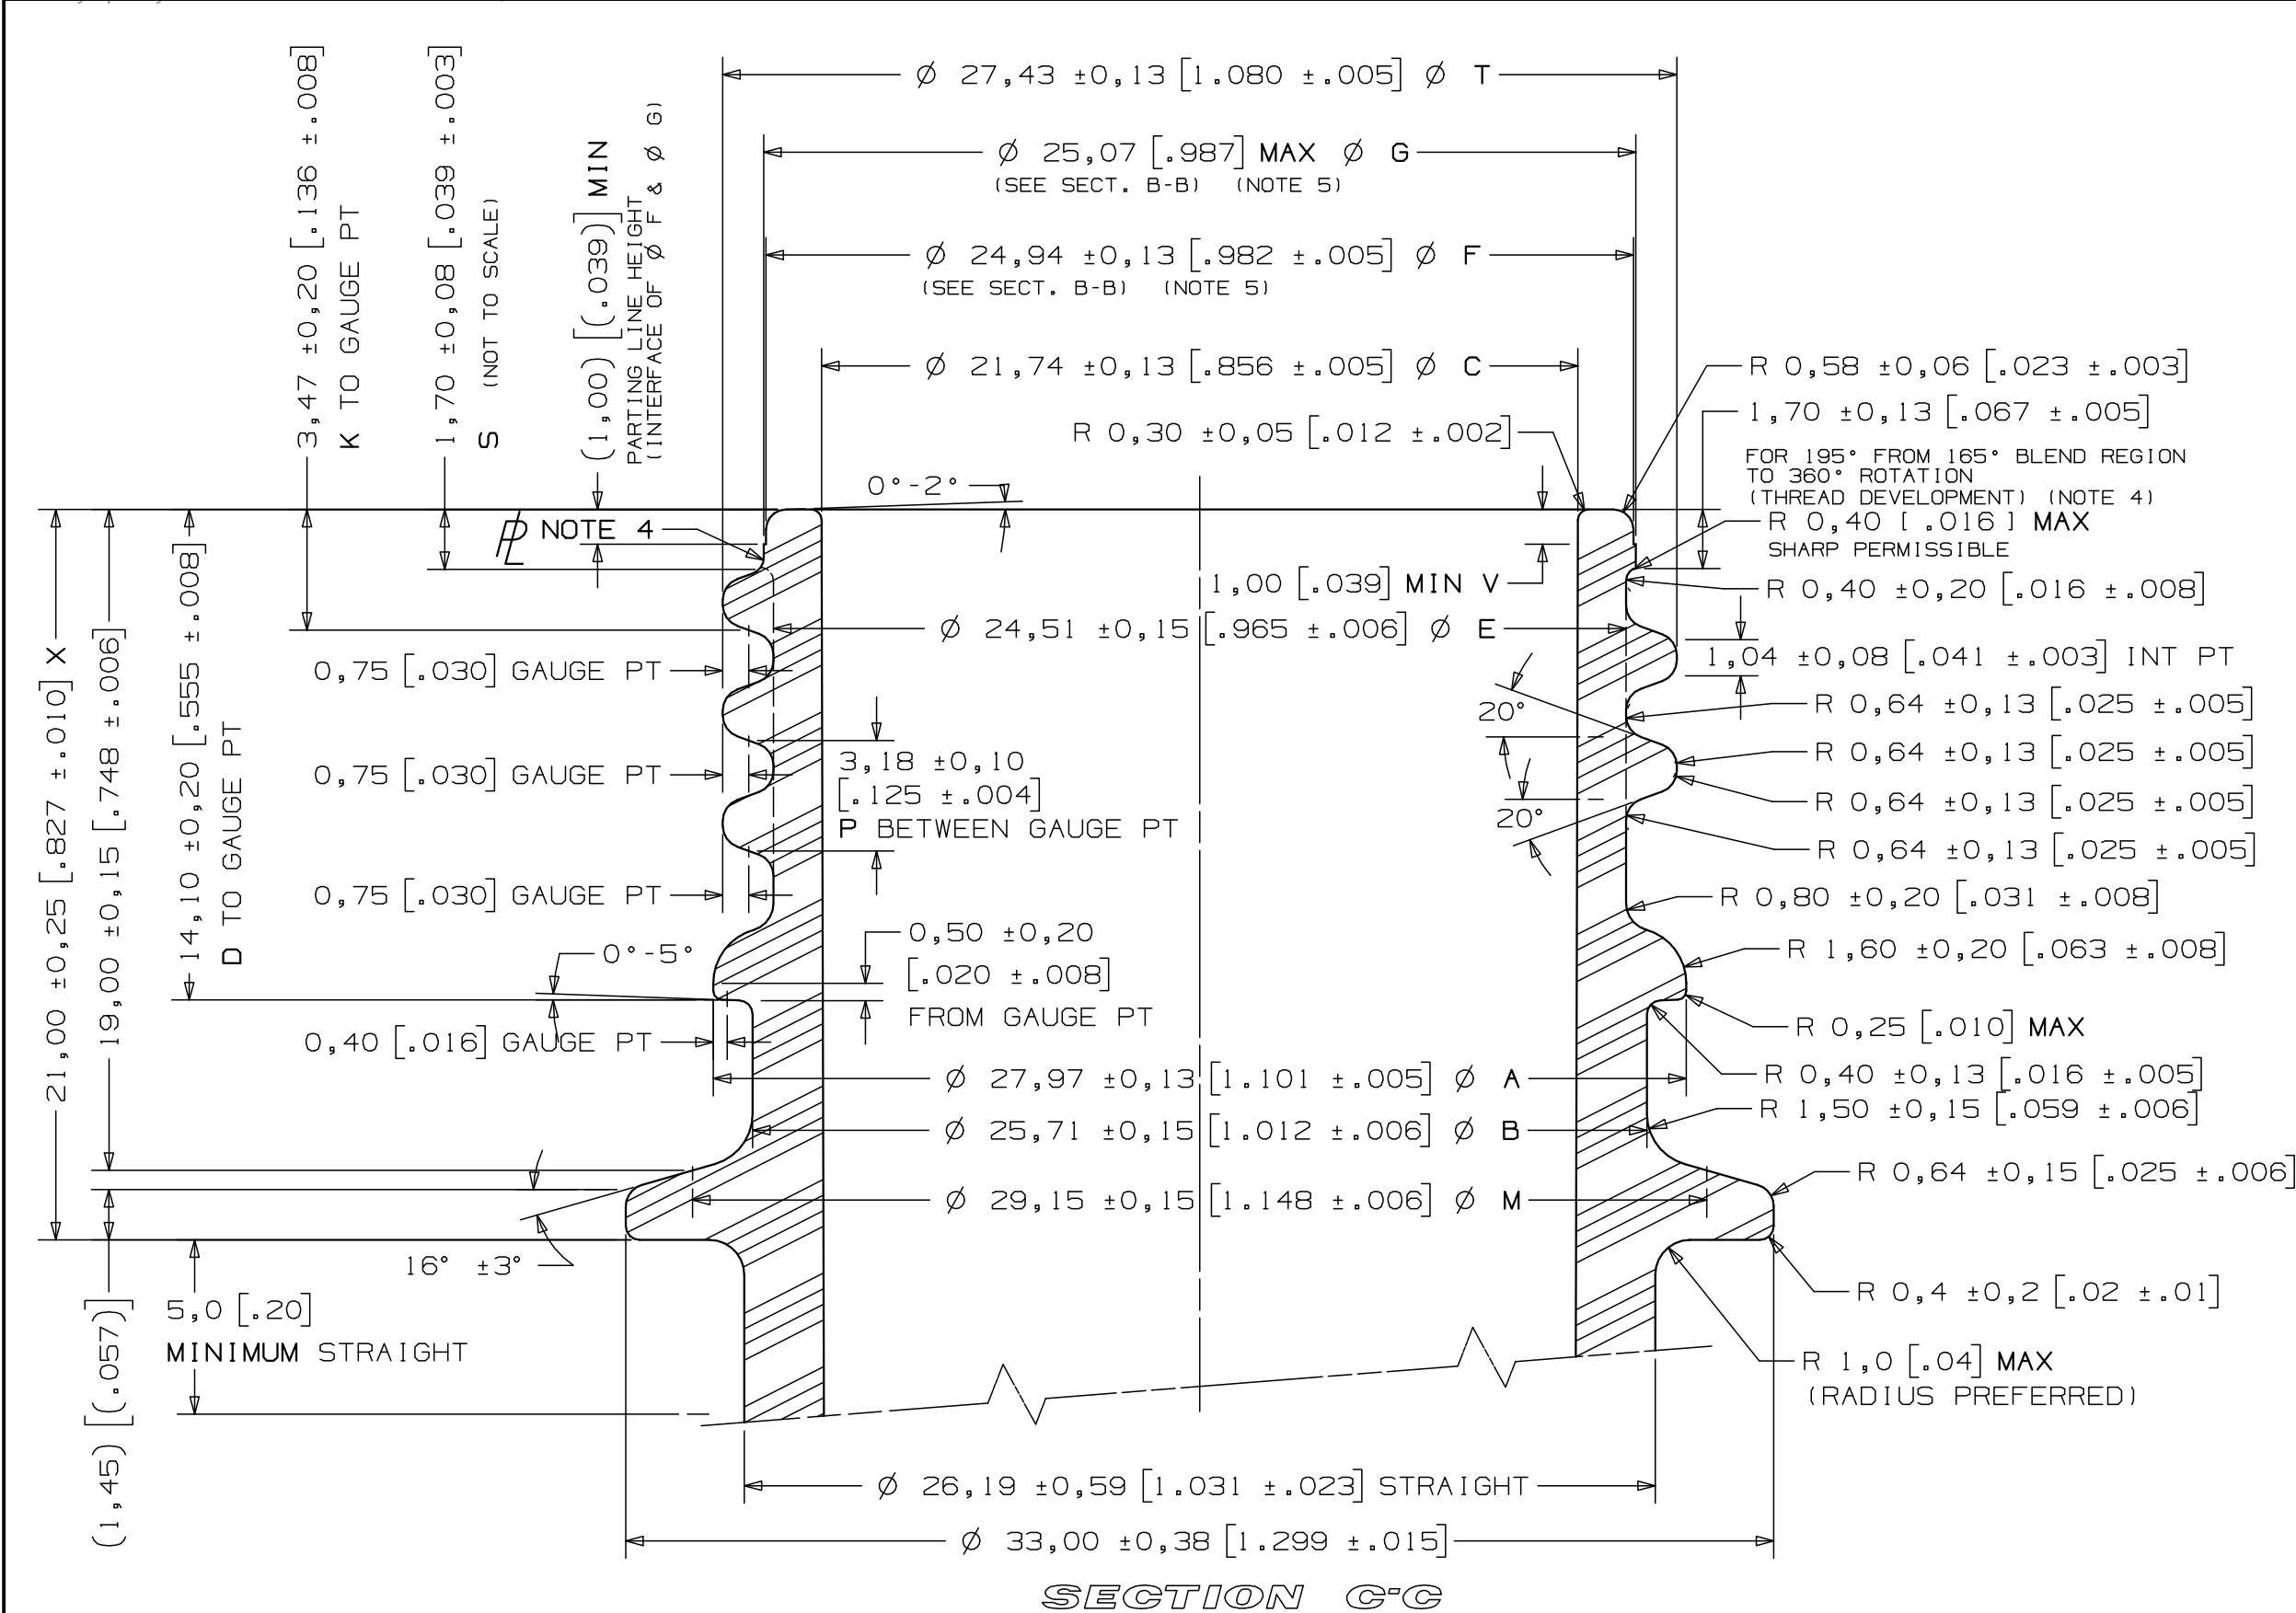

FINISH REV	DATE	DESCRIPTION	BY
000	93/06/21	ORIGINAL ALCOA SPECIFICATION	SWM
001	98/05/29	SPECIFICATION CONVERTED TO STANDARDIZED FORMAT	SYK
002	2003/04/21	R0,35 ±0,10 WAS R0,2 TO R0,5; ±0,10 ADDED TO R0,40 BLEND; TITLE BLOCK LOGO AND INFO UPDATED	SYK

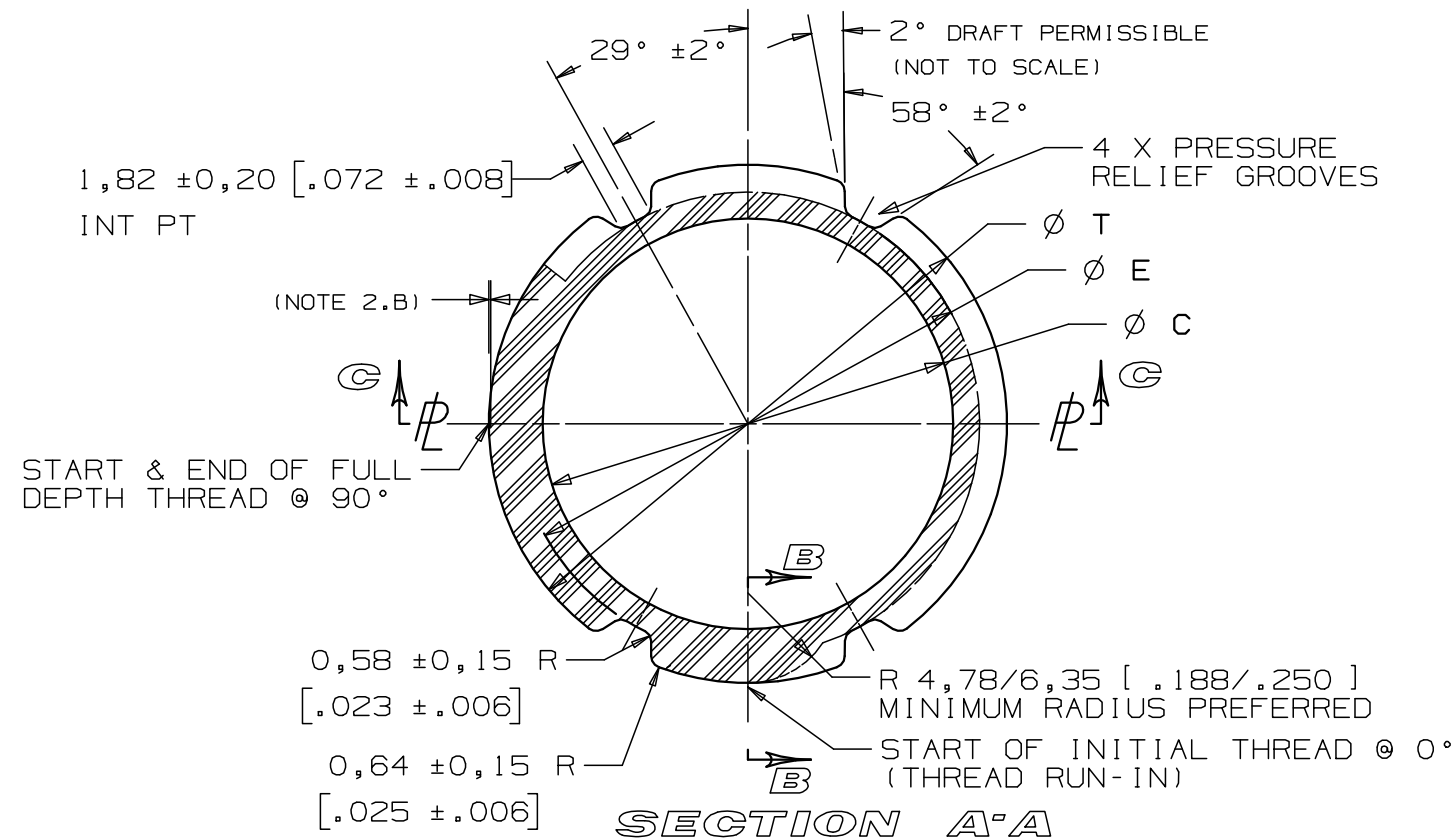

NOTES

- THIS IS A PRESSURE TOP, SIDE, AND INSIDE BORE SEAL FINISH. THE FINISH SHOULD BE SMOOTH AND FREE OF ANY DEFECTS THAT WILL CONTRIBUTE TO LOSS OF PRESSURE. FLASH NOT TO EXCEED 0,13mm [.005] PER SIDE, AND NOT TO BE CONTINUOUS.
- REQUIREMENTS FOR GOOD CLOSURE APPLICATION ON FINISH
 - 0,13mm MAX [.005] OUT-OF-PARALLEL SEALING SURFACE WITH NECK SUPPORT LEDGE IS ALLOWED FOR COCKED NECKS AND SLANTED FINISHES.
 - AN OFFSET OR VERTICAL MISMATCH OF THREAD IS NOT TO EXCEED 0,10mm [.004] AT THE MOLD SEAM. IT IS PERMISSIBLE TO RELIEVE THREAD AT MOLD SEAM, BUT NOT TO EXCEED 0,20mm [.008] ON DIAMETER IN AN ARC OF 15°. Ø T DIMENSION IS NOT MEASURED IN THE DEPRESSED AREA.
- THE START OF THREAD RUN-IN IS TO BE 90°±2° FROM PARTING LINE ON ALL FINISHES. (SECTION A-A)
- THE Ø G CONTACTING THE FIRST 165° OF THREAD IS "BLENDED" INTO THE UPPER SURFACE OF THE THREAD WITH A CONSTANT RADIUS OF 0,35 ±0,10 [.014 ±.004]. BLEND STARTS AT TIP OF THREAD RUN-IN. (THREAD DEVELOPMENT)
- NO OVERHANG ALLOWED AT ANY POINT IN 360° BETWEEN Ø F AND Ø G. A FLUSH TO 0,13mm [.005] MAXIMUM STEP IS ALLOWABLE ON ONE SIDE ONLY.
- REFER TO DRAWING #1168216 FOR VOLUNTARY STANDARD PET FINISH DIMENSION NOMENCLATURE

CONDITIONS OF USE AND LEGAL DISCLAIMER

THESE SPECIFICATIONS ARE VOLUNTARY. PRIOR TO USE, YOU SHOULD FIRST DETERMINE WHETHER THE USE OF THESE SPECIFICATIONS IS APPROPRIATE IN YOUR PARTICULAR APPLICATION. YOU, THE USER, ASSUME ALL RESPONSIBILITY FOR THE USE AND INTERPRETATION OF THESE SPECIFICATIONS AND AGREE TO USE AT YOUR OWN RISK. NO REPRESENTATIONS OR WARRANTIES, STATED OR IMPLIED, ARE MADE AS TO THE ACCURACY, COMPLETENESS OR USEFULNESS OF THESE STANDARDS OR THE CONFORMITY OF ANY PRODUCT TO THEM. YOU, THE USER, AGREE TO INDEMNIFY AND SAVE HARMLESS THE ISBT, THEIR RESPECTIVE OFFICERS, DIRECTORS, EMPLOYEES AND AGENTS FROM ANY AND ALL LOSSES, CLAIMS, OR DAMAGES RESULTING FROM THEIR USE INCLUDING INJURY OR DEATH OF ANY PERSON OR DAMAGE TO ANY PROPERTY OF WHATSOEVER NATURE.

GENERAL TOLERANCES	DIMENSIONS SHOWN ARE FINISHED PLASTIC SIZES		DESCRIPTION		 INTERNATIONAL SOCIETY OF BEVERAGE TECHNOLOGISTS WWW.THREADSPECS.COM SUPPORT@THREADSPECS.COM FINISH No PCO 969-1810-002 DRAWING No 1165362-2
	METRIC	[IMPERIAL]	PCO - 1810 VOLUNTARY STANDARD 28mm CSD FINISH		
	MILLIMETRES	[INCHES]			
	X,X ±0,3	(.XX ±0.01)			
	X,XX ±0,13	(.XXX ±0.005)			
	X° ±2°				
X°X' ±0°15'		DWN	J.SYKES	DATE	98/05/29