



Lee Spring®

leespring.com

2011


STOCK SPRINGS & CUSTOM SPRINGS



LeeP™ Plastic
Composite Springs



Compression Springs



REDUX™ Wave
Springs



HEFTY™ Springs



Extension Springs



Torsion Springs



Belleville Washers



Specialty
Stock Parts



**Now Featuring
MIL-SPEC Springs!**

Custom Springs



Call: 888-SPRINGS (888-777-4647)

Visit: www.leespring.com | **Email:** sales@leespring.com | **Fax:** 888-426-6655

REACH
COMPLIANT

ROHS
COMPLIANT

ISO 9001 Certified

How To Determine Sales Prices

Free Standard Ground Shipping within Continental United States.

1. Select the spring you want by **LEE STOCK NUMBER**.
2. Read across to the last column **PRICE GROUP** to obtain the price code letter under either column **M** (Music Wire), column **S** (302* Stainless Steel), or column **S316** (316 Stainless Steel), or column **E** (Elgiloy®) where applicable.
3. Refer to the **PRICE GROUP** below for quantities from 10 to 199 of an item.
4. Minimum Order: 10 of the same Lee Stock Number per item ordered.
5. Small Order Shipping & Processing Charge: Prices for 1-9 pieces of the same Lee Stock Number will be charged at the 10-piece price, plus an additional \$20.00 Shipping & Processing Charge per order.
6. For pricing on the HEFTY™ Die Springs, REDUX™ Wave Springs, LeeP™ Springs and Constant Force Springs, refer to their specific product sections.
7. Prices are subject to change without notice.

PRICES EFFECTIVE JANUARY 2011 • TERMS NET 30 DAYS.

Prices Shown are Per Spring Per Quantity. Quantities Cannot Be Combined to Lower Item Pricing.

For pricing or to place on-line orders from 10 to 1000 pieces of an item, visit www.leespring.com.

For pricing above 1000 pieces, please submit a request through www.leespring.com or contact us by email, phone or fax. Major credit cards gladly accepted.

PRICE GROUP	QUANTITIES				PRICE GROUP	QUANTITIES			
	10-19 Each	20-49 Each	50-99 Each	100-199 Each		10-19 Each	20-49 Each	50-99 Each	100-199 Each
E	5.45	3.11	1.58	1.01	AO	13.64	8.46	5.38	3.84
F	5.70	3.26	1.67	1.03	AP	14.03	8.73	5.62	4.04
G	5.88	3.39	1.74	1.07	AR	14.40	9.02	5.85	4.23
J	6.06	3.49	1.81	1.13	AS	14.81	9.31	6.12	4.45
K	6.29	3.62	1.90	1.18	AT	15.24	9.63	6.39	4.68
L	6.53	3.77	1.98	1.24	AU	15.65	9.95	6.68	4.94
M	6.77	3.92	2.07	1.32	AW	16.10	10.28	7.00	5.19
N	7.00	4.06	2.16	1.37	AX	16.55	10.64	7.33	5.47
P	7.25	4.22	2.26	1.44	AY	17.02	11.01	7.68	5.76
R	7.50	4.37	2.36	1.52	AZ	17.51	11.38	8.05	6.09
S	7.74	4.53	2.46	1.58	AZA	18.55	12.10	8.45	6.43
T	8.01	4.69	2.57	1.65	AZB	19.09	12.52	8.87	6.80
U	8.26	4.86	2.67	1.74	AZC	19.65	12.98	9.33	7.18
W	8.60	5.07	2.82	1.85	AZD	20.22	13.45	9.81	7.62
X	8.87	5.23	2.94	1.94	AZE	20.81	13.96	10.33	8.07
Y	9.15	5.42	3.06	2.03	AZF	21.41	14.49	10.89	8.56
Z	9.44	5.60	3.18	2.12	AZG	22.04	15.05	11.51	9.10
AA	9.71	5.78	3.32	2.21	AZH	22.68	15.65	12.15	9.68
AB	10.00	5.98	3.46	2.33	AZJ	23.36	16.26	12.84	10.31
AC	10.29	6.16	3.59	2.44	AZK	24.05	16.93	13.60	11.00
AD	10.59	6.36	3.75	2.55	AZL	24.77	17.64	14.42	11.73
AE	10.89	6.58	3.90	2.67	AZM	25.98	18.45	15.30	12.54
AG	11.22	6.79	4.07	2.79	AZN	26.76	19.25	16.28	13.42
AJ	11.86	7.20	4.37	3.02	AZO	27.55	20.09	17.32	14.39
AK	12.20	7.45	4.55	3.17	AZP	28.37	20.99	18.47	15.47
AL	12.55	7.68	4.73	3.32	AZQ	29.19	21.94	19.73	16.64
AM	12.90	7.94	4.94	3.49	AZR	30.03	22.96	21.10	17.91
AN	13.26	8.19	5.16	3.66	AZS	30.89	24.20	22.60	19.35

When ordering, please specify suffix M for Music Wire, S for 302 Stainless Steel*, S316 for 316 Stainless Steel or E for Elgiloy, where applicable.

www.leespring.com | Call: 888-SPRINGS (888-777-4647) | Fax: 888-426-6655

* Type 302 may be substituted with Type 304 at Lee Spring's discretion. † Elgiloy is a trademark of Elgiloy Ltd. Partnership.

Great ideas mean great innovations and greater product choice!

We're always listening to you and responding with new solutions as we lead the industry with our ground-breaking products-

Lee Spring Innovations:

LeeP™ Plastic Composite Springs — combining the strength of metal with the special attributes of high performing engineered thermoplastics. Ideal for use in corrosive environments.

BANTAM Mini Compression Springs — small in size but big in strength.
Heat resistant to 850° F with superior resistance in most chemical environments.

Lite Pressure™ Springs — meet the demand for compression springs combining low spring rates with larger diameters. Suited for valves, pistons, syringes, motor brushes, dispensers, contacts and toys.

Battery Springs — in a unique choice of nickel coated music wire or silver coated beryllium copper that provides greater strength and longer wear in a variety of configurations. Designed for standard alkaline batteries.

Type 316 Stainless Steel Springs — provide improved corrosion resistance, superior cleanliness, greater product purity, and exceptional visual integrity. These springs meet the needs of industries including medical, pharmaceutical, food processing, and aerospace.



You asked. We listened... and expanded our offering.

REDUX™ Wave Springs — smaller and more versatile, for 1/4" and 5/16" hole diameters.

Constant Force Springs — made of high yield Type 301 Stainless Steel to resist uncoiling.

Belleville Washers — made of 300 Series Stainless Steel for corrosion resistance.



From Ten Springs to Ten Million Springs, Stock Parts or Custom Designs, Lee Spring Offers the Complete Package.

From start to finish, Lee Spring has the Custom capabilities you need. Whether you require Custom Springs, Wire Forms, Stampings or Fourslide parts, count on Lee Spring for design expertise and extensive world-class manufacturing capabilities. Our solution-driven Engineering staff provides comprehensive support from the simplest technical question to your most complex project. We can also assist you with FAA Specs, Military Specifications, FDA Trial Support, prototype engineering collaboration and regulatory compliance including RoHS, REACH and DFARS. Lee Spring can manufacture short run or large production run output, supported by sophisticated spring testing equipment. Lee Spring is an ISO 9001 registered company.

Expert Engineering – Technical Support • CAD Drawings • Consultative Design

Extensive Manufacturing – Compression Springs • Die Springs • Wave Springs • Extension Springs • Torsion Springs • Belleville Washers • Constant Force Springs • Wire Forms • Stampings • Fourslide Parts

Distinct Capabilities – Plastic Compression Springs • Drawbar Springs • Cone Springs • Double Torsion Springs

Numerous Materials and Finishes – Ferrous Alloys • Non Ferrous Alloys • Plastic Composites • Plating • Electropolishing • Powder Coating • Color Coding

Comprehensive Secondary Operations – Grinding • Passivation • Heat-Treating • Setting • Shot Peening

We...

Make It Easy – exceptional personal attention by a caring and knowledgeable staff.

Have It – immediate availability of over 19,000 catalog products.

Can Design It – engineering expertise for design assistance and optimization.

Can Make It – extensive custom manufacturing capabilities.

www.springipedia.com

Introducing SPRING-I-PEDIA

A complete guide to spring engineering, Spring-i-pedia, sponsored by Lee Spring, is the indispensable web resource that takes the mystery out of understanding and specifying springs. This unique and innovative reference tool contains everything you ever wanted to know about springs but didn't know who to ask. See page 24 for more details.



INTRODUCTION

Stock Spring Prices	Inside Front Cover
Guide to Lee Spring Part Numbers	2
Specifications/Engineering Information	3
Metric Conversion Table	3
Conditions of Sale	3
Stock Springs Overview	4

LEEP™ PLASTIC COMPOSITE SPRINGS 5

STOCK COMPRESSION SPRINGS

Bantam Mini Series (Inch)	7
Instrument Series (Inch)	11
Instrument Series (Metric)	21
Lite Pressure™ (Inch)	25
Standard Series (Inch)	47
Standard Series (Metric)	117
Heavy Duty Series (Inch)	129

STOCK REDUX™ WAVE SPRINGS 135

STOCK HEFTY™ DIE SPRINGS

HEFTY™ Overview	143
HEFTY™ Medium Load Series	144
HEFTY™ Medium Load Plus Series	146
HEFTY™ Medium Heavy Load Series	148
HEFTY™ Heavy Load Series	150
HEFTY™ Extra Heavy Load Series	152
HEFTY™ Spring Prices	154

STOCK EXTENSION SPRINGS

Instrument Series (Inch)	159
Instrument Series (Metric)	163
Standard Series (Inch)	165
Standard Series (Metric)	191

STOCK TORSION SPRINGS 195

STOCK BELLEVILLE WASHERS 211

SPECIALTY STOCK PARTS

Constant Force Springs	217
Battery Springs	219
Continuous Length Extension Springs	221
Spring Kits	224
MIL-SPEC Springs	225


CUSTOM SPRINGS AND FORMED WIRE PARTS

Overview	243
Custom Springs Capabilities	245
Glossary of Spring Terminology	246
Regulatory Compliance and Certifications: (RoHS, DFARS, Traceability, Mil Spec)	247
Compression Spring Specification Form	248
Coned Compression Spring Specification Form	250
REDUX™ Wave Spring Specification Form	252
LeeP™ Plastic Composite Spring Specification Form	254
Extension Spring Specification Form	256
Coned Extension Spring Specification Form	258
Drawbar Spring Specification Form	260
Torsion Spring Specification Form	262
Constant Force Specification Form	264
Battery Spring Specification Form	266
Belleville Washer Specification Form	268
Wire Forms	270
Stampings	271
Fourslide Parts	272

GO TO WWW.LEESPRING.COM FOR ADDITIONAL STOCK ITEMS

LEEP™ PLASTIC COMPOSITE SPRINGS


Pg. 5



COMPRESSION SPRINGS


Pg. 7

	Series
BANTAM MINI SERIES (Inch)	CB
INSTRUMENT SERIES (Inch)	CI
INSTRUMENT SERIES (Metric)	CIM
LITE PRESSURE™ SERIES (Inch)	LP
STANDARD SERIES (Inch)	LC
STANDARD SERIES (Metric)	LCM
HEAVY DUTY SERIES (Inch)	LHC

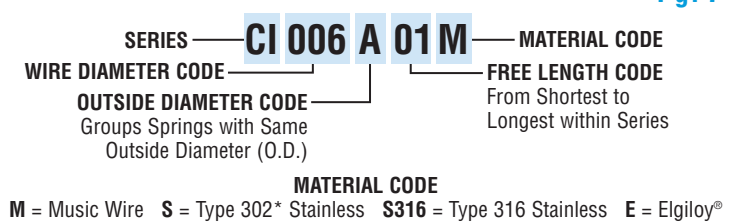

REDUX™ WAVE SPRINGS


Pg. 135



HEFTY™ DIE SPRINGS

Pg. 143


	Load
MEDIUM LOAD SERIES	A
MEDIUM LOAD PLUS SERIES	AB
MEDIUM HEAVY SERIES	B
HEAVY LOAD SERIES	C
EXTRA HEAVY LOAD SERIES	D

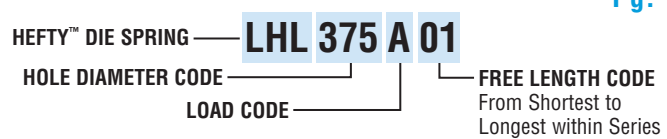

EXTENSION SPRINGS

Pg. 159

	Series
INSTRUMENT SERIES (Inch)	EI
INSTRUMENT SERIES (Metric)	EIM
STANDARD SERIES (Inch)	LE
STANDARD SERIES (Metric)	LEM

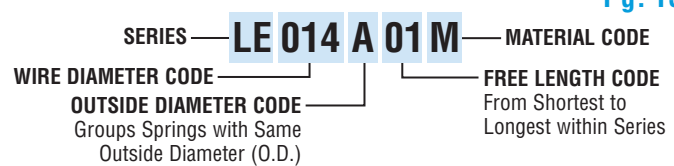


MATERIAL CODE: **M** = Music Wire **S** = Type 302* Stainless

TORSION SPRINGS

Pg. 195


	Wind
TORSION SERIES (Left Wind)	L
TORSION SERIES (Right Wind)	R

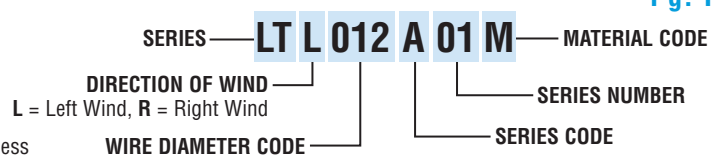

MATERIAL CODE: **M** = Music Wire **S** = Type 302* Stainless


BELLEVILLE WASHERS

Pg. 211



CONSTANT FORCE SPRINGS


Pg. 217

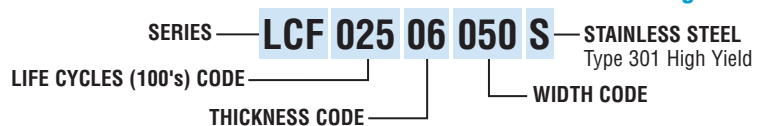

BATTERY SPRINGS


Pg. 219

	Mount Type
INTERIOR MOUNT SERIES	A
EXTERIOR MOUNT SERIES	B
ADAPTABLE MOUNT SERIES	C
DOUBLE MOUNT SERIES	D

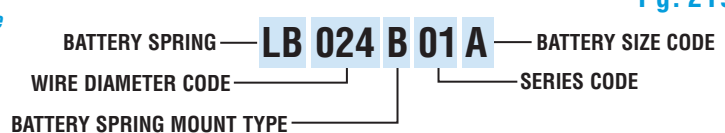

CONTINUOUS LENGTH EXTENSION SPRINGS

Pg. 221

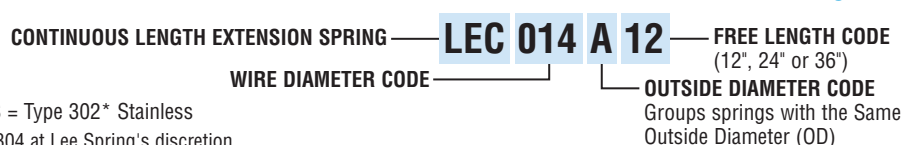

MATERIAL CODE: **M** = Music Wire **S** = Type 302* Stainless

*Type 302 may be substituted with Type 304 at Lee Spring's discretion.

3 —

19,000+ stock springs

Free Ground Shipping in US
Free CAD Downloads
Free Certificates of Compliance
Expert Engineering Support
RoHS Compliance

LeeP™ Plastic Composite Compression Springs

Size Range:

Fit in Hole: .375" - 1" / 9.53 mm - 25.4 mm

Free Length: .375" - 1.25" / 9.53 mm - 31.75 mm

- Six Color-Coded Strengths
- Ultem* Resin

Stock Compression Springs

Size Range:

Outside Diameter: .025" - 1.937" / .64 mm - 49.20 mm

Free Length: .025" - 6" / .64 mm - 152.40 mm

Wire Size: .0040" - .177" / .10 mm - 4.50 mm

Products and Materials:

Bantam Mini Compression Springs

- Elgiloy®†

Instrument Compression Springs (Inch and Metric)

- Ends square, not ground
- Pre-coated Music Wire or Passivated Type 302/304 Stainless
- Passivated & Ultrasonically Cleaned Type 316 Stainless**

Lite Pressure Compression Springs (Inch)

- Passivated & Ultrasonically Cleaned Type 316 Stainless**

Standard Compression Springs (Inch and Metric)

- Squared and Ground Ends
- Plated Music Wire or Passivated Type 302/304 Stainless
- Passivated & Ultrasonically Cleaned Type 316 Stainless**

Heavy Duty Compression Spring (Inch)

- Squared and Ground Ends
- Shot-Peened and Pre-Set
- Plated Music Wire/Oil Tempered MB Wire or Passivated Stainless

REDUX™ Wave Springs

Size Range:

Outside Diameter: .224" - 1.688" / 5.69 mm - 42.88 mm

Free Height: .075" - 1.75" / 1.90 mm - 44.45 mm

Material:

Passivated 17-7 PH Stainless Steel

HEFTY™ Die Springs

Size Range:

Fit in Hole: .375" - 2" / 9.53 mm - 50.80 mm

Free Length: 1" - 6" / 25.40 mm - 152.40 mm

Products and Materials:

Five Color Coded Series Reflecting Increasing Strengths

- Medium, Medium Plus, Medium Heavy, Heavy, Extra Heavy
- Round Music Wire or Chrome Silicon
- Squared and Ground Ends
- Powder Coated
- Shot-Peened and Pre-set

Stock Extension Springs

Size Range:

Outside Diameter: .063" - 2.0" / 1.60 mm - 50.80 mm

Free Length: .250" - 10.0" / 6.35 mm - 254.00 mm

Wire Size: .007" - .207" / .18 mm - 5.26 mm

Loop Configuration:

- Random position, full diameter machine or crossover center
- Loop openings approximately one wire diameter
- Direction of wind optional

Products and Materials:

Instrument Extension Spring Series (Inch and Metric)

- Pre-coated Music Wire or Passivated Stainless Steel

Standard Extension Spring Series (Inch and Metric)

- Plated Music Wire or Passivated Stainless Steel

Stock Torsion Springs

Size Range:

Outside Diameter: .105" - 2.141" / 2.667 mm - 54.38 mm

Work Over Rod: .062" - 2.141" / 1.58 mm - 54.38 mm

Leg Length: .375" - 4.25" / 9.53 mm - 107.95 mm

Products and Materials:

- Free Position of Legs: 90°, 180°, 270°, 360°
- Choice of Left hand wound or Right hand wound
- Plated Music Wire or Passivated Stainless Steel

Belleville Washers

Size Range:

Outside Diameter: .188" - 2.500" / 4.78 mm - 63.50 mm

Inside Diameter: .093" - 1.25" / 2.36 mm - 31.75 mm

Material:

Passivated 300 Series Stainless Steel

Specialty Products

MIL-SPEC Springs

- 24585 Compression
- 24586 Extension

Battery Springs

- Nickel Plated Music Wire or Silver Coated Beryllium Copper
- Multiple configurations to fit AA, AAA, C or D

Stainless Steel Constant Force Springs

Notes:

* Ultem is a registered trademark of SABIC Innovative Plastics IP BV.

** Type 316 Stainless Steel Stock option only available on Inch Compression Stock Springs.

† Elgiloy is a trademark of Elgiloy Ltd. Partnership.

Type 302 may be substituted with Type 304 at Lee Spring's discretion.



Typical properties of Ultem*

Tensile Strength
[ASTM D638] 15,000 psi minimum

Ultimate Shear Strength
[ASTM D732] Approx. 15,000 psi

Thermal Conductivity 0.85 BTU-in/hr-ft²-°F

Max. Working Temperature
[or Relative Thermal Index (Continuous, air)] 340 °F (171°C)

Dielectric Constant
[1 MHz; ASTM D150(2)] 3.15

Dielectric Strength
[Short Term; ASTM D149(2)] 830 V/mil

Flammability
UL94 Low (V-0)

Outgassing
Total Mass Loss 0.40%

Non-magnetic YES

Recyclable YES

Chemical Resistance

Strong Acids Excellent Resistance¹

Weak Bases Excellent Resistance¹

Alcohols Excellent Resistance¹

Ethers Excellent Resistance¹

Inorganic Salt Solutions Excellent Resistance¹

Steam Excellent Resistance¹

Weak Alkalis Excellent Resistance¹

NOTE: This information represents typical values intended for reference only. Environmental Stress Cracking Resistance [ESCR] to Chemicals at 73°F (23°C) and at 0.25-0.5% strain under immersion unless otherwise specified.

Background

The properties of the spring material in many critical applications frequently include specific requirements beyond load bearing capability. Material specifications may require chemical resistance, non-magnetism, physical stability at elevated temperatures, lightness (weight), non-conductivity, and recyclability. A variety of metal alloys have been used to meet these secondary requirements with varying degrees of success. Customers have increasingly requested springs meeting one or more of these requirements, citing specifications most often found in 'space age' inert materials. This led Lee Spring's technical team to research designs and materials that combine the strength of metal with the special characteristics of high performance plastics.

Why LeeP™ Springs?

LeeP™ Plastic Composite compression springs are designed to perform under load with minimum side thrust. The innovative design results in a high strength to weight ratio through efficient use of material; they are manufactured efficiently by means of injection molding. LeeP springs are fabricated in distinctive formulations of Ultem® PEI resins in six increasing color coded strengths: Red, Orange, Yellow, Green, Blue and Violet, with Violet being the strongest. Ultem resins were selected as Lee's material of choice meeting LeeP performance criteria.


Offering:

- Six color coded strengths for ease of identification: Red, Orange, Yellow, Green, Blue and Violet (weakest to strongest).
- Designs to fit in standard hole sizes from 0.375" to 1.000" with free lengths from 0.375" to 1.250".
- Different sizes can be stacked and/or nested to get varied lengths and spring rates.

(Note: A flat plastic washer could be used between springs while stacking for better performance).



Price Code	10-19 Ea	20-49 Ea	50-99 Ea	100-199 Ea
L1	9.78	7.82	6.65	5.99
L2	10.57	8.46	7.19	6.47
L3	11.43	9.14	7.77	7.00
L4	12.36	9.89	8.40	7.56
L5	13.36	10.69	9.08	8.18



*Trademark of SABIC Innovative Plastics IP BV. ¹Excellent resistance equals greater than 90% retention of mechanical properties.

LeeP™ Plastic Composite Springs Color Code: ■ R= Red, ■ O= Orange, ■ Y= Yellow, ■ G= Green, ■ B= Blue, ■ V= Violet

LEE STOCK NUMBER	COLOR	HOLE DIAMETER		OUTSIDE DIAMETER		ROD DIAMETER		MATERIAL THICKNESS X RADIAL WALL		APPROX. LOAD @ SOLID HGT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE CODE
		IN.	MM	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LL 038 038 U000	R									0.991	0.449	0.375	9.525	3.699	0.066	0.108	2.738	L1
LL 038 038 U10G	O							.030	0.76	1.498	0.679	0.375	9.525	5.593	0.100	0.108	2.738	L1
LL 038 038 U20G	Y	.375	9.525	.350	8.890	.150	3.810	x	x	1.636	0.742	0.375	9.525	6.108	0.109	0.108	2.738	L1
LL 038 038 U30G	G							.082	2.08	1.811	0.822	0.375	9.525	6.762	0.121	0.108	2.738	L1
LL 038 038 U36G	B									1.941	0.880	0.375	9.525	7.247	0.129	0.108	2.738	L1
LL 038 038 U40G	V									2.041	0.926	0.375	9.525	7.620	0.136	0.108	2.738	L1
LL 038 050 U000	R									0.991	0.449	0.500	12.700	2.648	0.047	0.127	3.220	L2
LL 038 050 U10G	O							.030	0.76	1.498	0.679	0.500	12.700	4.004	0.072	0.127	3.220	L2
LL 038 050 U20G	Y	.375	9.525	.350	8.890	.150	3.810	x	x	1.636	0.742	0.500	12.700	4.373	0.078	0.127	3.220	L2
LL 038 050 U30G	G							.082	2.08	1.811	0.822	0.500	12.700	4.841	0.086	0.127	3.220	L2
LL 038 050 U36G	B									1.941	0.880	0.500	12.700	5.188	0.093	0.127	3.220	L2
LL 038 050 U40G	V									2.041	0.926	0.500	12.700	5.455	0.097	0.127	3.220	L2
LL 050 050 U000	R									1.905	0.864	0.500	12.700	5.396	0.096	0.148	3.753	L2
LL 050 050 U10G	O							.042	1.07	2.881	1.307	0.500	12.700	8.160	0.146	0.148	3.753	L2
LL 050 050 U20G	Y	.500	12.700	.485	12.319	.218	5.537	x	x	3.147	1.427	0.500	12.700	8.912	0.159	0.148	3.753	L2
LL 050 050 U30G	G							.112	2.84	3.484	1.580	0.500	12.700	9.867	0.176	0.148	3.753	L2
LL 050 050 U36G	B									3.733	1.693	0.500	12.700	10.573	0.189	0.148	3.753	L2
LL 050 050 U40G	V									3.925	1.780	0.500	12.700	11.118	0.199	0.148	3.753	L2
LL 050 075 U000	R									1.985	0.900	0.750	19.050	3.557	0.064	0.193	4.912	L4
LL 050 075 U10G	O							.042	1.07	3.002	1.362	0.750	19.050	5.379	0.096	0.193	4.912	L4
LL 050 075 U20G	Y	.500	12.700	.470	11.938	.218	5.537	x	x	3.278	1.487	0.750	19.050	5.875	0.105	0.193	4.912	L4
LL 050 075 U30G	G							.112	2.84	3.630	1.646	0.750	19.050	6.504	0.116	0.193	4.912	L4
LL 050 075 U36G	B									3.889	1.764	0.750	19.050	6.970	0.124	0.193	4.912	L4
LL 050 075 U40G	V									4.090	1.855	0.750	19.050	7.329	0.131	0.193	4.912	L4
LL 075 075 U000	R									4.340	1.969	0.750	19.050	8.180	0.146	0.221	5.607	L3
LL 075 075 U10G	O							.062	1.57	6.563	2.977	0.750	19.050	12.370	0.221	0.221	5.607	L3
LL 075 075 U20G	Y	.750	19.050	.720	18.288	.343	8.712	x	x	7.167	3.251	0.750	19.050	13.510	0.241	0.221	5.607	L3
LL 075 075 U30G	G							.172	4.37	7.935	3.599	0.750	19.050	14.957	0.267	0.221	5.607	L3
LL 075 075 U36G	B									8.503	3.857	0.750	19.050	16.028	0.286	0.221	5.607	L3
LL 075 075 U40G	V									8.941	4.056	0.750	19.050	16.853	0.301	0.221	5.607	L3
LL 075 100 U000	R									4.340	1.969	1.000	25.400	5.846	0.104	0.259	6.588	L4
LL 075 100 U10G	O							.062	1.57	6.563	2.977	1.000	25.400	8.840	0.158	0.259	6.588	L4
LL 075 100 U20G	Y	.750	19.050	.720	18.288	.343	8.712	x	x	7.167	3.251	1.000	25.400	9.655	0.172	0.259	6.588	L4
LL 075 100 U30G	G							.172	4.37	7.935	3.599	1.000	25.400	10.689	0.191	0.259	6.588	L4
LL 075 100 U36G	B									8.503	3.857	1.000	25.400	11.454	0.205	0.259	6.588	L4
LL 075 100 U40G	V									8.941	4.056	1.000	25.400	12.044	0.215	0.259	6.588	L4
LL 100 100 U000	R									8.133	3.689	1.000	25.400	11.641	0.208	0.303	7.699	L4
LL 100 100 U10G	O							.085	2.16	12.298	5.578	1.000	25.400	17.602	0.314	0.303	7.699	L4
LL 100 100 U20G	Y	1.000	25.400	.965	24.511	.469	11.913	x	x	13.431	6.092	1.000	25.400	19.225	0.343	0.303	7.699	L4
LL 100 100 U30G	G							.230	5.84	14.870	6.745	1.000	25.400	21.284	0.380	0.303	7.699	L4
LL 100 100 U36G	B									15.934	7.228	1.000	25.400	22.808	0.407	0.303	7.699	L4
LL 100 100 U40G	V									16.755	7.600	1.000	25.400	23.982	0.428	0.303	7.699	L4
LL 100 125 U000	R									8.133	3.689	1.250	31.750	8.946	0.160	0.343	8.717	L5
LL 100 125 U10G	O							.085	2.16	12.298	5.578	1.250	31.750	13.528	0.242	0.343	8.717	L5
LL 100 125 U20G	Y	1.000	25.400	.965	24.511	.469	11.913	x	x	13.431	6.092	1.250	31.750	14.775	0.264	0.343	8.717	L5
LL 100 125 U30G	G							.230	5.84	14.870	6.745	1.250	31.750	16.357	0.292	0.343	8.717	L5
LL 100 125 U36G	B									15.934	7.228	1.250	31.750	17.528	0.313	0.343	8.717	L5
LL 100 125 U40G	V									16.755	7.600	1.250	31.750	18.431	0.329	0.343	8.717	L5

SPECIAL INSTRUCTIONS FOR LeeP™ PLASTIC COMPOSITE SPRINGS SERIES


PRICING: See page 5 for 10 -199 pricing. To price or order up to 599 pieces, visit leespring.com; 600+ pieces, contact Lee Spring.
CUSTOM DESIGNS: Custom LeeP Spring designs are available on request; see Custom Springs Section for LeeP RFQ form.

BANTAM™ Mini Compression Springs are Lee Spring's unique line of miniature springs. These Stock products are offered in wire sizes .0040, .0045, .0050 and .0055 in standard outside diameters of .025, .040 and .057. In order to meet and maximize the performance needs of a potentially diverse range of applications, Lee Spring selected Elgiloy® as the alloy for Stock BANTAM Mini Springs.

Elgiloy® is a Cobalt-Nickel alloy known for its high strength, e.g. 10% stronger than Type 316 Stainless Steel. It exhibits superior resistance in most corrosive environments including acetic acid, ammonium chloride, citric acid, sodium chloride and sodium sulfite. This material performs well in temperatures up to 850° F. Elgiloy® is non-magnetic. Applications include medical devices, pharmaceutical delivery devices, petro-chemical processes, aerospace and marine industries.

Custom Bantam Mini Springs can be designed using other materials. Contact Lee Spring Engineering for further information.

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
CB0040A 01 E	.025	.64	.032	.81	.0040	.10	.179	.081	0.050	1.270	8.779	0.157	0.030	0.753	R
CB0040A 02 E									0.075	1.905	5.295	0.095	0.041	1.047	R
CB0040A 03 E									0.100	2.540	3.791	0.068	0.053	1.342	R
CB0040A 04 E									0.125	3.175	2.952	0.053	0.064	1.637	R
CB0040A 05 E									0.150	3.810	2.417	0.043	0.076	1.931	R
CB0040A 06 E									0.175	4.445	2.047	0.037	0.088	2.226	R
CB0040A 07 E									0.200	5.080	1.774	0.032	0.099	2.521	R
CB0040A 08 E									0.225	5.715	1.566	0.028	0.111	2.815	R
CB0040A 09 E									0.250	6.350	1.402	0.025	0.122	3.110	R
CB0045A 01 E	.025	.64	.032	.81	.0045	.11	.261	.118	0.050	1.270	15.361	0.275	0.033	0.839	R
CB0045A 02 E									0.075	1.905	9.116	0.163	0.046	1.178	R
CB0045A 03 E									0.100	2.540	6.482	0.116	0.060	1.518	R
CB0045A 04 E									0.125	3.175	5.028	0.090	0.073	1.858	R
CB0045A 05 E									0.150	3.810	4.107	0.074	0.087	2.197	R
CB0045A 06 E									0.175	4.445	3.472	0.062	0.100	2.537	R
CB0045A 07 E									0.200	5.080	3.006	0.054	0.113	2.877	R
CB0045A 08 E									0.225	5.715	2.651	0.047	0.127	3.216	R
CB0045A 09 E									0.250	6.350	2.371	0.042	0.140	3.556	R
CB0050A 01 E	.025	.64	.032	.81	.0050	.13	.367	.166	0.050	1.270	26.102	0.467	0.036	0.913	R
CB0050A 02 E									0.075	1.905	15.226	0.273	0.051	1.293	R
CB0050A 03 E									0.100	2.540	10.748	0.192	0.066	1.673	R
CB0050A 04 E									0.125	3.175	8.305	0.149	0.081	2.054	R
CB0050A 05 E									0.150	3.810	6.767	0.121	0.096	2.434	R
CB0050A 06 E									0.175	4.445	5.710	0.102	0.111	2.814	R
CB0050A 07 E									0.200	5.080	4.938	0.088	0.126	3.194	R
CB0050A 08 E									0.225	5.715	4.350	0.078	0.141	3.574	R
CB0050A 09 E									0.250	6.350	3.887	0.070	0.156	3.954	R



SPECIAL INSTRUCTIONS FOR BANTAM MINI COMPRESSION SERIES


PRICING: See Inside Front Cover for pricing up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Elgiloy®. Elgiloy is a trademark of Elgiloy Ltd. Partnership.

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
CB0055A 01 E	.025	.64	.032	.81	.0055	.14	.501	.227	0.050	1.270	43.308	0.775	0.038	0.976	R
CB0055A 02 E									0.075	1.905	24.800	0.444	0.055	1.392	R
CB0055A 03 E									0.100	2.540	17.375	0.311	0.071	1.808	R
CB0055A 04 E									0.125	3.175	13.372	0.239	0.088	2.224	R
CB0055A 05 E									0.150	3.810	10.868	0.195	0.104	2.640	R
CB0055A 06 E									0.175	4.445	9.153	0.164	0.120	3.056	R
CB0055A 07 E									0.200	5.080	7.906	0.142	0.137	3.472	R
CB0055A 08 E									0.225	5.715	6.958	0.125	0.153	3.888	R
CB0055A 09 E									0.250	6.350	6.213	0.111	0.169	4.304	R
CB0040B 01 E	.040	1.02	.047	1.19	.0040	.10	.104	.047	0.100	2.540	1.534	0.027	0.032	0.813	R
CB0040B 02 E									0.150	3.810	0.978	0.018	0.043	1.102	R
CB0040B 03 E									0.200	5.080	0.718	0.013	0.055	1.391	R
CB0040B 04 E									0.250	6.350	0.567	0.010	0.066	1.680	R
CB0040B 05 E									0.300	7.620	0.469	0.008	0.078	1.969	R
CB0040B 06 E									0.350	8.890	0.399	0.007	0.089	2.258	R
CB0040B 07 E									0.400	10.160	0.348	0.006	0.100	2.547	R
CB0040B 08 E									0.450	11.430	0.308	0.006	0.112	2.836	R
CB0040B 09 E									0.500	12.700	0.277	0.005	0.123	3.125	R
CB0045B 01 E	.040	1.02	.047	1.19	.0045	.11	.151	.068	0.100	2.540	2.409	0.043	0.037	0.952	R
CB0045B 02 E									0.150	3.810	1.526	0.027	0.051	1.304	R
CB0045B 03 E									0.200	5.080	1.117	0.020	0.065	1.656	R
CB0045B 04 E									0.250	6.350	0.881	0.016	0.079	2.008	R
CB0045B 05 E									0.300	7.620	0.727	0.013	0.093	2.360	R
CB0045B 06 E									0.350	8.890	0.619	0.011	0.107	2.712	R
CB0045B 07 E									0.400	10.160	0.539	0.010	0.121	3.064	R
CB0045B 08 E									0.450	11.430	0.477	0.009	0.134	3.416	R
CB0045B 09 E									0.500	12.700	0.428	0.008	0.148	3.768	R
CB0050B 01 E	.040	1.02	.047	1.19	.0050	.13	.210	.095	0.100	2.540	3.666	0.066	0.043	1.088	R
CB0050B 02 E									0.150	3.810	2.308	0.041	0.059	1.504	R
CB0050B 03 E									0.200	5.080	1.684	0.030	0.076	1.920	R
CB0050B 04 E									0.250	6.350	1.326	0.024	0.092	2.336	R
CB0050B 05 E									0.300	7.620	1.093	0.020	0.108	2.752	R
CB0050B 06 E									0.350	8.890	0.930	0.017	0.125	3.168	R
CB0050B 07 E									0.400	10.160	0.809	0.014	0.141	3.584	R
CB0050B 08 E									0.450	11.430	0.716	0.013	0.157	4.000	R
CB0050B 09 E									0.500	12.700	0.642	0.011	0.174	4.415	R
CB0055B 01 E	.040	1.02	.047	1.19	.0055	.14	.283	.128	0.100	2.540	5.443	0.097	0.048	1.220	R
CB0055B 02 E									0.150	3.810	3.405	0.061	0.067	1.699	R
CB0055B 03 E									0.200	5.080	2.477	0.044	0.086	2.179	R
CB0055B 04 E									0.250	6.350	1.947	0.035	0.105	2.658	R
CB0055B 05 E									0.300	7.620	1.603	0.029	0.124	3.138	R
CB0055B 06 E									0.350	8.890	1.363	0.024	0.142	3.617	R
CB0055B 07 E									0.400	10.160	1.185	0.021	0.161	4.096	R
CB0055B 08 E									0.450	11.430	1.048	0.019	0.180	4.576	R
CB0055B 09 E									0.500	12.700	0.940	0.017	0.199	5.055	R


SPECIAL INSTRUCTIONS FOR BANTAM MINI COMPRESSION SERIES

PRICING: See Inside Front Cover for pricing up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Elgiloy®.

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
CB0040C 01 E	.057	1.45	.063	1.60	.0040	.10	.071	.032	0.125	3.175	0.712	0.013	0.026	0.648	R
CB0040C 02 E									0.188	4.775	0.457	0.008	0.033	0.840	R
CB0040C 03 E									0.250	6.350	0.338	0.006	0.040	1.028	R
CB0040C 04 E									0.313	7.950	0.267	0.005	0.048	1.220	R
CB0040C 05 E									0.375	9.525	0.222	0.004	0.055	1.408	R
CB0040C 06 E									0.438	11.125	0.189	0.003	0.063	1.600	R
CB0040C 07 E									0.500	12.700	0.165	0.003	0.070	1.788	R
CB0040C 08 E									0.563	14.300	0.146	0.003	0.078	1.979	R
CB0040C 09 E									0.625	15.875	0.131	0.002	0.085	2.168	R
CB0045C 01 E	.057	1.45	.063	1.60	.0045	.11	.102	.046	0.125	3.175	1.073	0.019	0.030	0.765	R
CB0045C 02 E									0.188	4.775	0.686	0.012	0.040	1.004	R
CB0045C 03 E									0.250	6.350	0.506	0.009	0.049	1.239	R
CB0045C 04 E									0.313	7.950	0.400	0.007	0.058	1.478	R
CB0045C 05 E									0.375	9.525	0.331	0.006	0.067	1.713	R
CB0045C 06 E									0.438	11.125	0.282	0.005	0.077	1.951	R
CB0045C 07 E									0.500	12.700	0.246	0.004	0.086	2.186	R
CB0045C 08 E									0.563	14.300	0.218	0.004	0.095	2.425	R
CB0045C 09 E									0.625	15.875	0.196	0.004	0.105	2.660	R
CB0050C 01 E	.057	1.45	.063	1.60	.0050	.13	.141	.064	0.125	3.175	1.565	0.028	0.035	0.886	R
CB0050C 02 E									0.188	4.775	0.995	0.018	0.046	1.175	R
CB0050C 03 E									0.250	6.350	0.733	0.013	0.057	1.460	R
CB0050C 04 E									0.313	7.950	0.578	0.010	0.069	1.749	R
CB0050C 05 E									0.375	9.525	0.478	0.009	0.080	2.034	R
CB0050C 06 E									0.438	11.125	0.407	0.007	0.091	2.323	R
CB0050C 07 E									0.500	12.700	0.355	0.006	0.103	2.608	R
CB0050C 08 E									0.563	14.300	0.314	0.006	0.114	2.897	R
CB0050C 09 E									0.625	15.875	0.282	0.005	0.125	3.181	R
CB0055C 01 E	.057	1.45	.063	1.60	.0055	.14	.190	.086	0.125	3.175	2.222	0.040	0.040	1.009	R
CB0055C 02 E									0.188	4.775	1.406	0.025	0.053	1.351	R
CB0055C 03 E									0.250	6.350	1.033	0.018	0.066	1.688	R
CB0055C 04 E									0.313	7.950	0.813	0.015	0.080	2.030	R
CB0055C 05 E									0.375	9.525	0.673	0.012	0.093	2.367	R
CB0055C 06 E									0.438	11.125	0.572	0.010	0.107	2.710	R
CB0055C 07 E									0.500	12.700	0.499	0.009	0.120	3.046	R
CB0055C 08 E									0.563	14.300	0.441	0.008	0.133	3.389	R
CB0055C 09 E									0.625	15.875	0.396	0.007	0.147	3.726	R


SPECIAL INSTRUCTIONS FOR BANTAM MINI COMPRESSION SERIES

PRICING: See Inside Front Cover for pricing up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Elgiloy®.

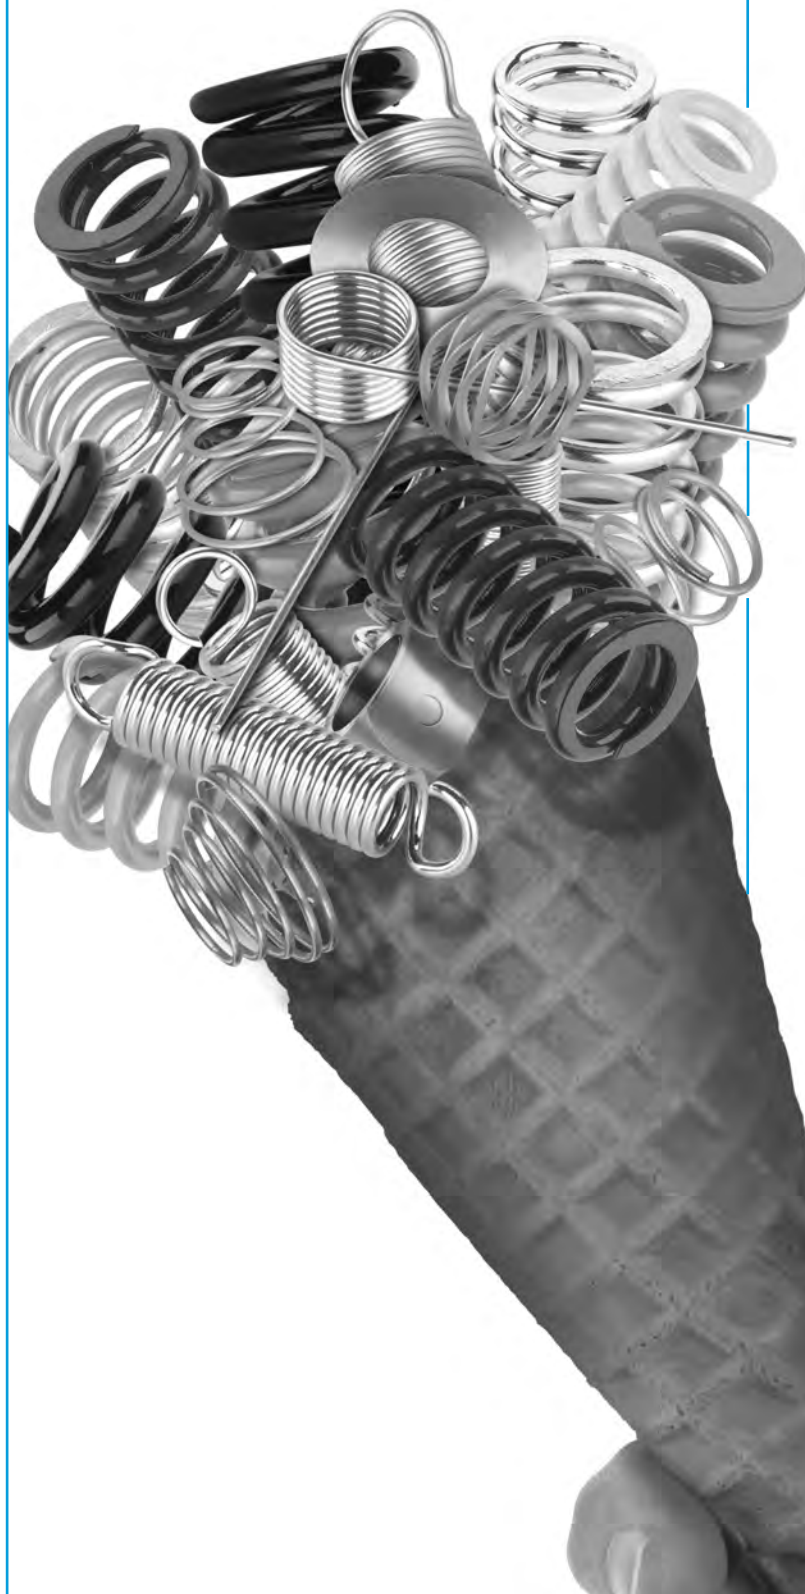

OVER 19,000 FLAVORS.

When it comes to springs, it's not about having the flavor of the day, it's about meeting the need of the moment. That's why whatever, whenever and wherever any type of spring is needed, professionals throughout the world rely on Lee Spring.

Since 1918 Lee Spring has offered the variety and experience to meet just about every stock and custom spring requirement. Our robust inventory consists of over 19,000 off-the-shelf stock items, including our latest additions: REDUX™ Wave Springs, Constant Force Springs, Type 316 Stainless Springs, and Lite Pressure™ Springs. All stock springs ship within 24 hours and ground shipping is free within the continental U.S.

Ordering is easy – online, by phone or by fax. Need help? Our knowledgeable customer service and engineering teams are ready to serve you with years of experience.

Give us a call today. We'll show you that there's more to springs than just plain vanilla.

Lee Spring®
leespring.com


*Not just a better spring,
a better spring company.*

COMPRESSION SPRINGS: INSTRUMENT SERIES (INCH)

ENDS NOT GROUND • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	M	S	S316
CI 006AA 01	.040	1.02	.047	1.19	.006	.15	.434	.197	0.100	2.54	8.92	0.160	0.051	1.30	E	J	N
CI 006AA 02									0.150	3.81	5.54	0.099	0.072	1.82	E	J	N
CI 006AA 03									0.200	5.08	4.02	0.072	0.092	2.33	E	J	N
CI 006AA 04									0.250	6.35	3.15	0.056	0.112	2.85	E	J	N
CI 006AA 05									0.300	7.62	2.59	0.046	0.132	3.36	E	J	N
CI 006AA 06									0.350	8.89	2.20	0.039	0.153	3.88	E	J	N
CI 006AA 07									0.400	10.16	1.91	0.034	0.173	4.39	E	J	N
CI 006AA 08									0.450	11.43	1.69	0.030	0.193	4.91	E	J	N
CI 006AA 09									SEE NOTE ON PAGE 3 UNDER PLATING								0.500
CI 007AA 01	.040	1.02	.047	1.19	.007	.18	.711	.323	0.100	2.54	17.88	0.320	0.060	1.53	E	J	N
CI 007AA 02									0.150	3.81	10.95	0.196	0.085	2.16	E	J	N
CI 007AA 03									0.200	5.08	7.89	0.141	0.110	2.79	E	J	N
CI 007AA 04									0.250	6.35	6.17	0.110	0.135	3.42	E	J	N
CI 007AA 05									0.300	7.62	5.06	0.091	0.160	4.05	E	J	N
CI 007AA 06									0.350	8.89	4.29	0.077	0.184	4.68	E	J	N
CI 007AA 07									0.400	10.16	3.73	0.067	0.209	5.31	E	J	N
CI 007AA 08									0.450	11.43	3.29	0.059	0.234	5.95	E	J	N
CI 007AA 09									SEE NOTE ON PAGE 3 UNDER PLATING								0.500
CI 006A 01	.057	1.45	.063	1.59	.006	.15	.300	.136	0.125	3.18	3.80	0.068	0.041	1.04	E	J	N
CI 006A 02									0.188	4.76	2.40	0.043	0.054	1.37	E	J	N
CI 006A 03									0.250	6.35	1.80	0.032	0.066	1.68	E	J	N
CI 006A 04									0.313	7.94	1.40	0.025	0.081	2.06	E	J	N
CI 006A 05									0.375	9.52	1.10	0.020	0.096	2.44	E	J	N
CI 006A 06									0.438	11.11	1.00	0.018	0.108	2.74	E	J	N
CI 006A 07									0.500	12.70	0.90	0.016	0.120	3.05	E	J	N
CI 006A 08									0.563	14.27	0.70	0.013	0.154	3.91	E	J	N
CI 006A 09									SEE NOTE ON PAGE 3 UNDER PLATING								0.625
CI 007A 01	.057	1.45	.063	1.59	.007	.18	.500	.226	0.125	3.18	6.90	0.123	0.051	1.30	E	J	N
CI 007A 02									0.188	4.76	4.10	0.073	0.070	1.78	E	J	N
CI 007A 03									0.250	6.35	3.00	0.053	0.090	2.29	E	J	N
CI 007A 04									0.313	7.94	2.40	0.043	0.105	2.67	E	J	N
CI 007A 05									0.375	9.52	2.10	0.037	0.119	3.02	E	J	N
CI 007A 06									0.438	11.11	1.70	0.030	0.140	3.56	E	J	N
CI 007A 07									0.500	12.70	1.50	0.027	0.158	4.01	E	J	N
CI 007A 08									0.563	14.29	1.30	0.023	0.173	4.39	E	J	N
CI 007A 09									SEE NOTE ON PAGE 3 UNDER PLATING								0.625
CI 008A 01	.057	1.45	.063	1.59	.008	.20	.800	.362	0.125	3.18	11.60	0.207	0.060	1.52	E	J	N
CI 008A 02									0.188	4.76	7.60	0.136	0.080	2.03	E	J	N
CI 008A 03									0.250	6.35	5.20	0.093	0.104	2.64	E	J	N
CI 008A 04									0.313	7.94	4.00	0.071	0.128	3.25	E	J	N
CI 008A 05									0.375	9.52	3.40	0.061	0.148	3.76	E	J	N
CI 008A 06									0.438	11.11	2.80	0.050	0.172	4.37	E	J	N
CI 008A 07									0.500	12.70	2.40	0.043	0.196	4.98	E	J	N
CI 008A 08									0.563	14.29	2.20	0.039	0.210	5.33	E	J	N
CI 008A 09									SEE NOTE ON PAGE 3 UNDER PLATING								0.625



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: INSTRUMENT SERIES (INCH)

ENDS NOT GROUND • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
															M	S	S316
CI 007AB 01	.063	1.59	.078	1.98	.007	.18	.426	.193	0.125	3.18	5.48	0.098	0.047	1.20	E	J	N
CI 007AB 02									0.188	4.78	3.41	0.061	0.063	1.60	E	J	N
CI 007AB 03									0.250	6.35	2.49	0.044	0.079	2.00	E	J	N
CI 007AB 04									0.313	7.95	1.95	0.035	0.095	2.40	E	J	N
CI 007AB 05									0.375	9.53	1.66	0.030	0.110	2.80	E	J	N
CI 007AB 06									0.438	11.13	1.37	0.024	0.126	3.20	E	J	N
CI 007AB 07									0.500	12.70	1.19	0.021	0.142	3.60	E	J	N
CI 007AB 08									0.563	14.30	1.05	0.019	0.158	4.00	E	J	N
CI 007AB 09									0.625	15.88	0.94	0.017	0.173	4.40	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	
CI 008AB 01	.063	1.59	.078	1.98	.008	.20	.854	.387	0.125	3.18	11.55	0.206	0.051	1.30	E	J	N
CI 008AB 02									0.188	4.78	7.11	0.127	0.068	1.72	E	J	N
CI 008AB 03									0.250	6.35	5.16	0.092	0.084	2.13	E	J	N
CI 008AB 04									0.313	7.95	4.04	0.072	0.100	2.54	E	J	N
CI 008AB 05									0.375	9.53	3.32	0.059	0.116	2.95	E	J	N
CI 008AB 06									0.438	11.13	2.82	0.050	0.133	3.37	E	J	N
CI 008AB 07									0.500	12.70	2.45	0.044	0.149	3.78	E	J	N
CI 008AB 08									0.563	14.30	2.16	0.039	0.165	4.20	E	J	N
CI 008AB 09									0.625	15.88	1.94	0.035	0.182	4.61	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	
CI 009AB 01	.063	1.59	.078	1.98	.009	.23	.939	.426	0.125	3.18	15.32	0.274	0.064	1.62	E	J	N
CI 009AB 02									0.188	4.78	9.33	0.167	0.087	2.22	E	J	N
CI 009AB 03									0.250	6.35	6.73	0.120	0.111	2.81	E	J	N
CI 009AB 04									0.313	7.95	5.25	0.094	0.134	3.41	E	J	N
CI 009AB 05									0.375	9.53	4.31	0.077	0.157	4.00	E	J	N
CI 009AB 06									0.438	11.13	3.65	0.065	0.181	4.60	E	J	N
CI 009AB 07									0.500	12.70	3.17	0.057	0.204	5.19	E	J	N
CI 009AB 08									0.563	14.30	2.80	0.050	0.228	5.79	E	J	N
CI 009AB 09									0.625	15.88	2.51	0.045	0.251	6.38	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	
CI 010AB 01	.063	1.59	.078	1.98	.010	.25	1.312	.595	0.125	3.18	24.42	0.436	0.071	1.81	E	J	N
CI 010AB 02									0.188	4.78	14.68	0.262	0.099	2.51	E	J	N
CI 010AB 03									0.250	6.35	10.54	0.188	0.126	3.19	E	J	N
CI 010AB 04									0.313	7.95	8.20	0.146	0.153	3.88	E	J	N
CI 010AB 05									0.375	9.53	6.72	0.120	0.180	4.57	E	J	N
CI 010AB 06									0.438	11.13	5.69	0.102	0.207	5.26	E	J	N
CI 010AB 07									0.500	12.70	4.94	0.088	0.234	5.95	E	J	N
CI 010AB 08									0.563	14.30	4.35	0.078	0.261	6.64	E	J	N
CI 010AB 09									0.625	15.88	3.90	0.070	0.288	7.33	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: INSTRUMENT SERIES (INCH)

ENDS NOT GROUND • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP										
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless								
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	M	S	S316								
CI 008B 01	.088	2.24	.094	2.38	.008	.20	.500	.226	0.125	3.18	5.50	0.098	0.042	1.07	E	J	N								
CI 008B 02									0.188	4.76	3.50	0.062	0.052	1.32	E	J	N								
CI 008B 03									0.250	6.35	2.40	0.043	0.064	1.62	E	J	N								
CI 008B 04									0.313	7.94	2.00	0.036	0.072	1.83	E	J	N								
CI 008B 05									0.375	9.52	1.40	0.025	0.092	2.34	E	J	N								
CI 008B 06									0.438	11.11	1.30	0.023	0.096	2.44	E	J	N								
CI 008B 07									0.500	12.70	1.10	0.020	0.110	2.79	E	J	N								
CI 008B 08									0.563	14.29	1.00	0.018	0.120	3.05	E	J	N								
CI 008B 09									0.625	15.88	0.90	0.016	0.140	3.56	E	J	N								
CI 008B 10									0.688	17.48	0.84	0.015	0.143	3.63	E	J	N								
CI 008B 11									SEE NOTE ON PAGE 3 UNDER PLATING								0.750	19.05	0.77	0.014	0.154	3.91	E	J	N
CI 010B 01									.088	2.24	.094	2.38	.010	.25	.800	.362	0.125	3.18	12.70	0.226	0.055	1.40	E	J	N
CI 010B 02	0.188	4.76	7.00	0.125	0.075	1.90	E	J									N								
CI 010B 03	0.250	6.35	5.20	0.093	0.090	2.29	E	J									N								
CI 010B 04	0.313	7.94	4.00	0.071	0.108	2.74	E	J									N								
CI 010B 05	0.375	9.52	3.30	0.059	0.125	3.18	E	J									N								
CI 010B 06	0.438	11.11	2.90	0.052	0.138	3.50	E	J									N								
CI 010B 07	0.500	12.70	2.50	0.044	0.155	3.94	E	J									N								
CI 010B 08	0.563	14.29	2.20	0.039	0.172	4.37	E	J									N								
CI 010B 09	0.625	15.88	1.80	0.032	0.205	5.21	E	J									N								
CI 010B 10	0.688	17.45	1.70	0.030	0.226	5.74	E	J									N								
CI 010B 11	0.750	19.05	1.60	0.029	0.238	6.05	E	J									N								
CI 010B 12	0.875	22.23	1.45	0.026	0.256	6.50	E	J									N								
CI 010B 13	SEE NOTE ON PAGE 3 UNDER PLATING																1.000	25.40	1.30	0.023	0.281	7.13	E	J	N
CI 012B 01	.088	2.24	.094	2.38	.012	.30	1.400	.634									0.125	3.18	26.00	0.464	0.069	1.75	E	J	N
CI 012B 02									0.188	4.76	15.00	0.267	0.093	2.36	E	J	N								
CI 012B 03									0.250	6.35	11.00	0.196	0.114	2.90	E	J	N								
CI 012B 04									0.313	7.94	8.50	0.152	0.138	3.50	E	J	N								
CI 012B 05									0.375	9.52	6.70	0.119	0.162	4.11	E	J	N								
CI 012B 06									0.438	11.11	5.80	0.103	0.183	4.65	E	J	N								
CI 012B 07									0.500	12.70	5.00	0.089	0.204	5.18	E	J	N								
CI 012B 08									0.563	14.29	4.50	0.080	0.226	5.74	E	J	N								
CI 012B 09									0.625	15.88	3.90	0.070	0.250	6.35	E	J	N								
CI 012B 10									0.750	19.05	3.00	0.053	0.315	8.00	E	J	N								
CI 012B 11									0.875	22.23	2.80	0.049	0.355	9.02	E	J	N								
CI 012B 12									SEE NOTE ON PAGE 3 UNDER PLATING								1.000	25.40	2.40	0.043	0.403	10.23	E	J	N
CI 008BC 01									.094	2.39	.109	2.77	.008	.20	.407	.185	0.125	3.18	4.80	0.086	0.040	1.02	E	J	N
CI 008BC 02	0.188	4.78	2.95	0.053	0.050	1.27	E	J									N								
CI 008BC 03	0.250	6.35	2.14	0.038	0.060	1.53	E	J									N								
CI 008BC 04	0.313	7.94	1.68	0.030	0.070	1.78	E	J									N								
CI 008BC 05	0.375	9.53	1.38	0.025	0.080	2.03	E	J									N								
CI 008BC 06	0.438	11.12	1.17	0.021	0.090	2.29	E	J									N								
CI 008BC 07	0.500	12.70	1.02	0.018	0.100	2.54	E	J									N								
CI 008BC 08	0.563	14.29	0.90	0.016	0.110	2.79	E	J									N								
CI 008BC 09	SEE NOTE ON PAGE 3 UNDER PLATING																0.625	15.88	0.81	0.014	0.120	3.05	E	J	N



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: INSTRUMENT SERIES (INCH)

ENDS NOT GROUND • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
CI 010BC 01									0.125	3.18	11.95	0.213	0.053	1.34	E	J	N
CI 010BC 02									0.188	4.78	7.19	0.128	0.067	1.71	E	J	N
CI 010BC 03									0.250	6.35	5.16	0.092	0.081	2.07	E	J	N
CI 010BC 04									0.313	7.95	4.05	0.072	0.095	2.42	E	J	N
CI 010BC 05	.094	2.38	.109	2.77	.010	.25	.864	.392	0.375	9.53	3.35	0.060	0.109	2.76	E	J	N
CI 010BC 06									0.438	11.13	2.86	0.051	0.122	3.10	E	J	N
CI 010BC 07									0.500	12.70	2.51	0.045	0.135	3.43	E	J	N
CI 010BC 08									0.563	14.30	2.21	0.039	0.149	3.78	E	J	N
CI 010BC 09									0.625	15.88	1.98	0.035	0.163	4.13	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	
CI 012BC 01									0.125	3.18	25.28	0.451	0.065	1.64	E	J	N
CI 012BC 02									0.188	4.78	14.80	0.264	0.084	2.14	E	J	N
CI 012BC 03									0.250	6.35	10.61	0.189	0.103	2.63	E	J	N
CI 012BC 04									0.313	7.95	8.20	0.146	0.123	3.12	E	J	N
CI 012BC 05									0.375	9.53	6.70	0.120	0.142	3.61	E	J	N
CI 012BC 06									0.438	11.13	5.65	0.101	0.162	4.11	E	J	N
CI 012BC 07	.094	2.38	.109	2.77	.012	.30	1.526	.692	0.500	12.70	4.89	0.087	0.181	4.59	E	J	N
CI 012BC 08									0.563	14.30	4.31	0.077	0.200	5.09	E	J	N
CI 012BC 09									0.625	15.88	3.86	0.069	0.220	5.58	E	J	N
CI 012BC 10									0.688	17.48	3.48	0.062	0.239	6.07	E	J	N
CI 012BC 11									0.750	19.05	3.14	0.056	0.261	6.63	E	J	N
CI 012BC 12									0.875	22.23	2.67	0.048	0.300	7.63	E	J	N
CI 012BC 13									1.000	25.40	2.33	0.042	0.339	8.62	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	
CI 008C 01									0.250	6.35	1.91	0.034	0.055	1.40	E	J	N
CI 008C 02									0.313	7.95	1.49	0.027	0.064	1.62	E	J	N
CI 008C 03									0.375	9.53	1.23	0.022	0.072	1.83	E	J	N
CI 008C 04									0.438	11.12	1.04	0.019	0.081	2.05	E	J	N
CI 008C 05	.102	2.59	.109	2.77	.008	.20	.372	.169	0.500	12.70	0.91	0.016	0.089	2.27	E	J	N
CI 008C 06									0.563	14.29	0.80	0.014	0.098	2.49	E	J	N
CI 008C 07									0.625	15.88	0.72	0.013	0.106	2.70	E	J	N
CI 008C 08									0.750	19.05	0.59	0.011	0.124	3.14	E	J	N
CI 008C 09									0.875	22.23	0.51	0.009	0.141	3.57	E	J	N
CI 008C 10									1.000	25.40	0.44	0.008	0.158	4.01	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	
CI 010C 01									0.250	6.35	4.10	0.073	0.080	2.02	E	J	N
CI 010C 02									0.313	7.95	3.20	0.057	0.094	2.38	E	J	N
CI 010C 03									0.375	9.53	2.60	0.046	0.107	2.73	E	J	N
CI 010C 04									0.438	11.13	2.20	0.039	0.121	3.08	E	J	N
CI 010C 05	.102	2.59	.109	2.77	.010	.25	.700	.320	0.500	12.70	1.90	0.034	0.135	3.43	E	J	N
CI 010C 06									0.563	14.30	1.70	0.030	0.149	3.78	E	J	N
CI 010C 07									0.625	15.88	1.50	0.027	0.163	4.13	E	J	N
CI 010C 08									0.750	19.05	1.20	0.022	0.190	4.84	E	J	N
CI 010C 09									0.875	22.23	1.10	0.019	0.218	5.54	E	J	N
CI 010C 10									1.000	25.40	0.90	0.016	0.246	6.24	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: INSTRUMENT SERIES (INCH)

ENDS NOT GROUND • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
CI 011C 01	.102	2.59	.109	2.77	.011	.28	1.000	.453	0.250	6.35	6.10	0.109	0.088	2.23	E	J	N
CI 011C 02									0.313	7.95	4.70	0.084	0.104	2.63	E	J	N
CI 011C 03									0.375	9.53	3.90	0.069	0.119	3.03	E	J	N
CI 011C 04									0.438	11.13	3.30	0.058	0.135	3.43	E	J	N
CI 011C 05									0.500	12.70	2.80	0.050	0.150	3.82	E	J	N
CI 011C 06									0.563	14.30	2.50	0.044	0.166	4.22	E	J	N
CI 011C 07									0.625	15.88	2.20	0.040	0.182	4.61	E	J	N
CI 011C 08									0.750	19.05	1.80	0.033	0.213	5.41	E	J	N
CI 011C 09									0.875	22.23	1.60	0.028	0.244	6.20	E	J	N
CI 011C 10									1.000	25.40	1.40	0.024	0.275	7.00	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	
CI 012C 01	.102	2.59	.109	2.77	.012	.30	1.250	.570	0.250	6.35	8.20	0.147	0.101	2.57	E	J	N
CI 012C 02									0.313	7.95	6.30	0.113	0.120	3.05	E	J	N
CI 012C 03									0.375	9.53	5.20	0.093	0.139	3.53	E	J	N
CI 012C 04									0.438	11.13	4.40	0.078	0.158	4.01	E	J	N
CI 012C 05									0.500	12.70	3.80	0.068	0.176	4.48	E	J	N
CI 012C 06									0.563	14.30	3.30	0.060	0.195	4.96	E	J	N
CI 012C 07									0.625	15.88	3.00	0.053	0.214	5.43	E	J	N
CI 012C 08									0.750	19.05	2.50	0.044	0.251	6.38	E	J	N
CI 012C 09									0.875	22.23	2.10	0.037	0.289	7.34	E	J	N
CI 012C 10									1.000	25.40	1.80	0.033	0.326	8.29	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	
CI 010D 01	.120	3.05	.125	3.18	.010	.25	.600	.270	0.250	6.35	3.20	0.058	0.067	1.70	E	J	N
CI 010D 02									0.313	7.95	2.50	0.045	0.077	1.96	E	J	N
CI 010D 03									0.375	9.53	2.10	0.037	0.087	2.22	E	J	N
CI 010D 04									0.438	11.13	1.70	0.031	0.098	2.48	E	J	N
CI 010D 05									0.500	12.70	1.50	0.027	0.108	2.74	E	J	N
CI 010D 06									0.563	14.30	1.30	0.024	0.118	3.00	E	J	N
CI 010D 07									0.625	15.88	1.20	0.021	0.128	3.26	E	J	N
CI 010D 08									0.750	19.05	1.00	0.018	0.149	3.77	E	J	N
CI 010D 09									0.875	22.23	0.80	0.015	0.169	4.29	E	J	N
CI 010D 10									1.000	25.40	0.70	0.013	0.189	4.81	E	J	N
CI 010D 11									1.125	28.58	0.70	0.012	0.209	5.32	E	J	N
CI 010D 12									1.250	31.75	0.60	0.010	0.231	5.87	E	J	N
CI 010D 13									1.500	38.10	0.50	0.009	0.273	6.93	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	
CI 011D 01	.120	3.05	.125	3.18	.011	.28	.850	.385	0.250	6.35	4.80	0.085	0.074	1.88	E	J	N
CI 011D 02									0.313	7.95	3.70	0.066	0.086	2.17	E	J	N
CI 011D 03									0.375	9.53	3.00	0.054	0.097	2.47	E	J	N
CI 011D 04									0.438	11.13	2.60	0.046	0.109	2.76	E	J	N
CI 011D 05									0.500	12.70	2.20	0.040	0.120	3.05	E	J	N
CI 011D 06									0.563	14.30	2.00	0.035	0.132	3.35	E	J	N
CI 011D 07									0.625	15.88	1.80	0.031	0.143	3.64	E	J	N
CI 011D 08									0.750	19.05	1.40	0.026	0.167	4.23	E	J	N
CI 011D 09									0.875	22.23	1.20	0.022	0.190	4.82	E	J	N
CI 011D 10									1.000	25.40	1.10	0.019	0.213	5.41	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: INSTRUMENT SERIES (INCH)

ENDS NOT GROUND • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
															M	S	S316
CI 012D 01	.120	3.05	.125	3.18	.012	.30	1.100	.500	0.250	6.35	6.50	0.117	0.084	2.13	E	J	N
CI 012D 02									0.313	7.95	5.10	0.090	0.097	2.48	E	J	N
CI 012D 03									0.375	9.53	4.10	0.074	0.111	2.82	E	J	N
CI 012D 04									0.438	11.13	3.50	0.062	0.125	3.17	E	J	N
CI 012D 05									0.500	12.70	3.00	0.054	0.138	3.51	E	J	N
CI 012D 06									0.563	14.30	2.70	0.047	0.152	3.86	E	J	N
CI 012D 07									0.625	15.88	2.40	0.042	0.165	4.20	E	J	N
CI 012D 7A									0.688	17.48	2.10	0.038	0.182	4.63	E	J	N
CI 012D 08									0.750	19.05	2.00	0.035	0.193	4.90	E	J	N
CI 012D 8A									0.813	20.65	1.80	0.032	0.207	5.25	E	J	N
CI 012D 09									0.875	22.23	1.70	0.030	0.220	5.59	E	J	N
CI 012D 9A									0.938	23.83	1.50	0.027	0.241	6.11	E	J	N
CI 012D 10									1.000	25.40	1.50	0.026	0.247	6.28	E	J	N
CI 012D 11									1.125	28.58	1.30	0.023	0.272	6.90	E	J	N
CI 012D 12	SEE NOTE ON PAGE 3 UNDER PLATING								1.250	31.75	1.20	0.021	0.291	7.40	E	J	N
CI 012D 13									1.500	38.10	1.00	0.018	0.342	8.69	E	J	N
CI 010DE 01	.156	3.96	.172	4.37	.010	.25	.436	.198	0.250	6.35	2.20	0.039	0.052	1.32	E	J	N
CI 010DE 02									0.313	7.95	1.71	0.031	0.058	1.48	E	J	N
CI 010DE 03									0.375	9.53	1.40	0.025	0.064	1.63	E	J	N
CI 010DE 04									0.438	11.13	1.19	0.021	0.071	1.79	E	J	N
CI 010DE 05									0.500	12.70	1.03	0.018	0.077	1.95	E	J	N
CI 010DE 06									0.563	14.30	0.91	0.016	0.083	2.11	E	J	N
CI 010DE 07									0.625	15.88	0.81	0.014	0.089	2.27	E	J	N
CI 010DE 08									0.750	19.05	0.67	0.012	0.102	2.58	E	J	N
CI 010DE 09									0.875	22.23	0.57	0.010	0.114	2.90	E	J	N
CI 010DE 10									SEE NOTE ON PAGE 3 UNDER PLATING								1.000
CI 011DE 01	.156	3.96	.172	4.37	.011	.28	.583	.265	0.250	6.35	3.08	0.055	0.061	1.54	E	J	N
CI 011DE 02									0.313	7.95	2.39	0.043	0.068	1.73	E	J	N
CI 011DE 03									0.375	9.53	1.95	0.035	0.076	1.93	E	J	N
CI 011DE 04									0.438	11.13	1.65	0.029	0.083	2.12	E	J	N
CI 011DE 05									0.500	12.70	1.43	0.026	0.091	2.31	E	J	N
CI 011DE 06									0.563	14.30	1.26	0.023	0.099	2.51	E	J	N
CI 011DE 07									0.625	15.88	1.13	0.020	0.106	2.70	E	J	N
CI 011DE 08									0.750	19.05	0.93	0.017	0.122	3.09	E	J	N
CI 011DE 09									0.875	22.23	0.79	0.014	0.137	3.48	E	J	N
CI 011DE 10									SEE NOTE ON PAGE 3 UNDER PLATING								1.000
CI 012DE 01	.156	3.96	.172	4.37	.012	.30	.764	.346	0.250	6.35	4.15	0.074	0.066	1.68	E	J	N
CI 012DE 02									0.313	7.95	3.21	0.057	0.075	1.90	E	J	N
CI 012DE 03									0.375	9.53	2.62	0.047	0.084	2.13	E	J	N
CI 012DE 04									0.438	11.13	2.21	0.039	0.093	2.35	E	J	N
CI 012DE 05									0.500	12.70	1.92	0.034	0.101	2.57	E	J	N
CI 012DE 06									0.563	14.30	1.69	0.030	0.110	2.80	E	J	N
CI 012DE 07									0.625	15.88	1.51	0.027	0.119	3.02	E	J	N
CI 012DE 08									0.750	19.05	1.24	0.022	0.136	3.46	E	J	N
CI 012DE 09									0.875	22.23	1.06	0.019	0.154	3.91	E	J	N
CI 012DE 10									SEE NOTE ON PAGE 3 UNDER PLATING								1.000

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: INSTRUMENT SERIES (INCH)

ENDS NOT GROUND • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
CI 013DE 01									0.250	6.35	5.49	0.098	0.074	1.87	E	J	N
CI 013DE 02									0.375	9.53	3.45	0.062	0.094	2.39	E	J	N
CI 013DE 03	.156	3.96	.172	4.37	.013	.33	.968	.439	0.500	12.70	2.51	0.045	0.115	2.92	E	J	N
CI 013DE 04									0.625	15.88	1.98	0.035	0.135	3.44	E	J	N
CI 013DE 05									0.750	19.05	1.63	0.029	0.156	3.96	E	J	N
CI 013DE 06									1.000	25.40	1.21	0.022	0.197	5.00	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	
CI 010E 01									0.250	6.35	1.97	0.035	0.046	1.16	E	J	N
CI 010E 02									0.313	7.95	1.53	0.027	0.050	1.27	E	J	N
CI 010E 03									0.375	9.53	1.26	0.022	0.054	1.38	E	J	N
CI 010E 04									0.438	11.12	1.06	0.019	0.059	1.49	E	J	N
CI 010E 05									0.500	12.70	0.92	0.016	0.063	1.60	E	J	N
CI 010E 06	.180	4.57	.188	4.78	.010	.25	.402	.182	0.563	14.29	0.81	0.015	0.068	1.72	E	J	N
CI 010E 07									0.625	15.88	0.73	0.013	0.072	1.83	E	J	N
CI 010E 08									0.750	19.05	0.60	0.011	0.081	2.05	E	J	N
CI 010E 09									0.875	22.23	0.51	0.009	0.090	2.28	E	J	N
CI 010E 10									1.000	25.40	0.45	0.008	0.098	2.50	E	J	N
CI 010E 11									1.250	31.75	0.36	0.006	0.116	2.95	E	J	N
CI 010E 12									1.500	38.10	0.29	0.005	0.134	3.40	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	
CI 012E 01									0.250	6.35	3.60	0.064	0.060	1.51	E	J	N
CI 012E 02									0.313	7.94	2.80	0.050	0.066	1.68	E	J	N
CI 012E 03									0.375	9.53	2.30	0.041	0.073	1.85	E	J	N
CI 012E 04									0.438	11.11	1.90	0.034	0.079	2.02	E	J	N
CI 012E 05									0.500	12.70	1.70	0.030	0.086	2.18	E	J	N
CI 012E 06	.180	4.57	.188	4.78	.012	.30	.690	.313	0.563	14.29	1.50	0.026	0.092	2.35	E	J	N
CI 012E 07									0.625	15.88	1.30	0.023	0.099	2.52	E	J	N
CI 012E 08									0.750	19.05	1.10	0.019	0.112	2.85	E	J	N
CI 012E 09									0.875	22.23	0.90	0.016	0.125	3.18	E	J	N
CI 012E 10									1.000	25.40	0.80	0.014	0.139	3.52	E	J	N
CI 012E 11									1.250	31.75	0.60	0.011	0.165	4.19	E	J	N
CI 012E 12									1.500	38.10	0.50	0.009	0.191	4.86	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	
CI 013E 01									0.250	6.35	4.60	0.082	0.067	1.70	E	J	N
CI 013E 02									0.313	7.94	3.50	0.063	0.075	1.90	E	J	N
CI 013E 03									0.375	9.53	2.90	0.051	0.083	2.10	E	J	N
CI 013E 04									0.438	11.11	2.40	0.043	0.091	2.31	E	J	N
CI 013E 05									0.500	12.70	2.10	0.038	0.099	2.51	E	J	N
CI 013E 06	.180	4.57	.188	4.78	.013	.33	.850	.385	0.563	14.29	1.90	0.033	0.107	2.71	E	J	N
CI 013E 07									0.625	15.88	1.70	0.030	0.115	2.91	E	J	N
CI 013E 08									0.750	19.05	1.40	0.024	0.130	3.31	E	J	N
CI 013E 09									0.875	22.23	1.20	0.021	0.146	3.72	E	J	N
CI 013E 10									1.000	25.40	1.00	0.018	0.162	4.12	E	J	N
CI 013E 11									1.250	31.75	0.80	0.014	0.194	4.93	E	J	N
CI 013E 12									1.500	38.10	0.70	0.012	0.226	5.73	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: INSTRUMENT SERIES (INCH)

ENDS NOT GROUND • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
CI 010EF 01									0.250	6.35	1.87	0.033	0.044	1.12	E	J	N
CI 010EF 02									0.313	7.95	1.45	0.026	0.048	1.23	E	J	N
CI 010EF 03									0.375	9.53	1.19	0.021	0.052	1.33	E	J	N
CI 010EF 04									0.438	11.12	1.01	0.018	0.056	1.43	E	J	N
CI 010EF 05									0.500	12.70	0.87	0.016	0.060	1.54	E	J	N
CI 010EF 06									0.563	14.29	0.77	0.014	0.064	1.64	E	J	N
CI 010EF 07	.188	4.78	.203	5.16	.010	.25	.384	.174	0.625	15.88	0.69	0.012	0.069	1.74	E	J	N
CI 010EF 08									0.750	19.05	0.57	0.010	0.077	1.95	E	J	N
CI 010EF 09									0.875	22.23	0.49	0.009	0.085	2.15	E	J	N
CI 010EF 10									1.000	25.40	0.42	0.008	0.093	2.36	E	J	N
CI 010EF 11									1.250	31.75	0.34	0.006	0.109	2.77	E	J	N
CI 010EF 12									1.375	34.93	0.31	0.005	0.117	2.97	E	J	N
CI 010EF 13									1.500	38.10	0.28	0.005	0.125	3.18	E	J	N
CI 010EF 14									1.750	44.45	0.24	0.004	0.141	3.59	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	
CI 012EF 01									0.250	6.35	1.97	0.035	0.073	1.86	E	J	N
CI 012EF 02									0.313	7.95	1.61	0.029	0.081	2.07	E	J	N
CI 012EF 03									0.375	9.53	1.31	0.023	0.091	2.32	E	J	N
CI 012EF 04									0.438	11.13	1.11	0.020	0.101	2.57	E	J	N
CI 012EF 05									0.500	12.70	0.96	0.017	0.111	2.82	E	J	N
CI 012EF 06	.188	4.78	.203	5.16	.012	.30	.349	.158	0.563	14.30	0.85	0.015	0.121	3.08	E	J	N
CI 012EF 07									0.625	15.88	0.76	0.014	0.131	3.33	E	J	N
CI 012EF 08									0.750	19.05	0.62	0.011	0.151	3.84	E	J	N
CI 012EF 09									0.875	22.23	0.53	0.009	0.171	4.34	E	J	N
CI 012EF 10									1.000	25.40	0.46	0.008	0.191	4.85	E	J	N
CI 012EF 11									1.250	31.75	0.37	0.007	0.231	5.86	E	J	N
CI 012EF 12									1.375	34.93	0.33	0.006	0.251	6.37	E	J	N
CI 012EF 13									1.500	38.10	0.30	0.005	0.271	6.88	E	J	N
CI 012EF 14									1.750	44.45	0.26	0.005	0.311	7.89	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	
CI 013EF 01									0.250	6.35	4.87	0.087	0.062	1.58	E	J	N
CI 013EF 02									0.313	7.95	3.75	0.067	0.069	1.75	E	J	N
CI 013EF 03									0.375	9.53	3.06	0.055	0.075	1.91	E	J	N
CI 013EF 04									0.438	11.13	2.58	0.046	0.082	2.08	E	J	N
CI 013EF 05	.188	4.78	.203	5.16	.013	.33	.916	.415	0.500	12.70	2.23	0.040	0.088	2.24	E	J	N
CI 013EF 06									0.563	14.30	1.96	0.035	0.095	2.41	E	J	N
CI 013EF 07									0.625	15.88	1.75	0.031	0.101	2.57	E	J	N
CI 013EF 08									0.750	19.05	1.45	0.026	0.114	2.90	E	J	N
CI 013EF 09									0.875	22.23	1.23	0.022	0.127	3.23	E	J	N
CI 013EF 10									1.000	25.40	1.07	0.019	0.140	3.56	E	J	N
CI 013EF 11									1.250	31.75	0.85	0.015	0.166	4.22	E	J	N
CI 013EF 12									1.375	34.93	0.77	0.014	0.179	4.55	E	J	N
SEE NOTE ON PAGE 3 UNDER PLATING																	

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: INSTRUMENT SERIES (INCH)

ENDS NOT GROUND • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
															M	S	S316
CI 010EG 01	.218	5.54	.234	5.94	.010	.25	.329	.149	0.250	6.35	1.57	0.028	0.041	1.03	E	J	N
CI 010EG 02									0.313	7.95	1.22	0.022	0.044	1.11	E	J	N
CI 010EG 03									0.375	9.53	1.00	0.018	0.047	1.18	E	J	N
CI 010EG 04									0.438	11.12	0.85	0.015	0.050	1.26	E	J	N
CI 010EG 05									0.500	12.70	0.74	0.013	0.053	1.34	E	J	N
CI 010EG 06									0.563	14.29	0.65	0.012	0.056	1.41	E	J	N
CI 010EG 07									0.625	15.88	0.58	0.010	0.059	1.49	E	J	N
CI 010EG 08									0.750	19.05	0.48	0.009	0.065	1.64	E	J	N
CI 010EG 09									0.875	22.23	0.41	0.007	0.071	1.80	E	J	N
CI 010EG 10									1.000	25.40	0.36	0.006	0.077	1.95	E	J	N
CI 010EG 11									1.250	31.75	0.28	0.005	0.089	2.26	E	J	N
CI 010EG 12									1.500	38.10	0.24	0.004	0.101	2.56	E	J	N
CI 010EG 13									SEE NOTE ON PAGE 3 UNDER PLATING								1.750
CI 012EG 01	.218	5.54	.234	5.94	.012	.30	.559	.254	0.250	6.35	2.81	0.050	0.051	1.30	E	J	N
CI 012EG 02									0.313	7.95	2.17	0.039	0.056	1.41	E	J	N
CI 012EG 03									0.375	9.53	1.77	0.032	0.060	1.53	E	J	N
CI 012EG 04									0.438	11.12	1.50	0.027	0.065	1.64	E	J	N
CI 012EG 05									0.500	12.70	1.30	0.023	0.069	1.75	E	J	N
CI 012EG 06									0.563	14.29	1.14	0.020	0.073	1.86	E	J	N
CI 012EG 07									0.625	15.88	1.02	0.018	0.078	1.98	E	J	N
CI 012EG 08									0.750	19.05	0.84	0.015	0.087	2.20	E	J	N
CI 012EG 09									0.875	22.23	0.72	0.013	0.096	2.43	E	J	N
CI 012EG 10									1.000	25.40	0.62	0.011	0.104	2.65	E	J	N
CI 012EG 11									1.250	31.75	0.50	0.009	0.122	3.10	E	J	N
CI 012EG 12									1.500	38.10	0.41	0.007	0.140	3.55	E	J	N
CI 012EG 13									SEE NOTE ON PAGE 3 UNDER PLATING								1.750
CI 013EG 01	.218	5.54	.234	5.95	.013	.33	.427	.194	0.250	6.35	2.35	0.042	0.068	1.74	E	J	N
CI 013EG 02									0.313	7.95	1.81	0.032	0.077	1.95	E	J	N
CI 013EG 03									0.375	9.53	1.48	0.026	0.085	2.17	E	J	N
CI 013EG 04									0.438	11.13	1.24	0.022	0.094	2.38	E	J	N
CI 013EG 05									0.500	12.70	1.08	0.019	0.102	2.59	E	J	N
CI 013EG 06									0.563	14.30	0.95	0.017	0.110	2.81	E	J	N
CI 013EG 07									0.625	15.88	0.85	0.015	0.119	3.02	E	J	N
CI 013EG 08									0.750	19.05	0.70	0.012	0.136	3.44	E	J	N
CI 013EG 09									0.875	22.23	0.59	0.011	0.152	3.87	E	J	N
CI 013EG 10									1.000	25.40	0.52	0.009	0.169	4.30	E	J	N
CI 013EG 11									1.250	31.75	0.41	0.007	0.203	5.15	E	J	N
CI 013EG 12									1.500	38.10	0.34	0.006	0.236	6.00	E	J	N
CI 013EG 13									SEE NOTE ON PAGE 3 UNDER PLATING								1.750



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

Lee Spring's Commitment To Continuous Improvement Means...



- ☒ **We Ask.**
- ☒ **We Listen.**
- ☒ **We Respond.**

We value your feedback and your ideas. Call, fax or email our Marketing Department today!

Call: 888-SPRINGS (ext. 1104)

Fax: 718-837-4763


Email: marketing@leespring.com

 **Lee Spring®**
leespring.com

COMPRESSION SPRINGS: INSTRUMENT SERIES (METRIC)

ENDS NOT GROUND • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		NOMINAL WIRE DIAMETER		TO WORK OVER ROD DIAMETER		APPROX. LOAD AT SOLID HGT.		NOMINAL FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	MM	IN.	MM	IN.	MM	IN.	MM	IN.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	M	S
CIM020A 01	1.40	.055	1.50	.059	.20	.008	.89	.035	2.58	.58	3.50	0.138	1.614	9.23	1.91	0.075	F	J
CIM020A 02											5.00	0.197	1.063	6.07	2.59	0.102	F	J
CIM020A 03											7.50	0.295	0.677	3.87	3.72	0.146	F	J
CIM020A 04											10.00	0.394	0.497	2.84	4.85	0.191	F	J
CIM020A 05											12.50	0.492	0.392	2.24	5.97	0.235	F	J
CIM020A 06											15.00	0.591	0.324	1.85	7.10	0.279	F	J
CIM020A 07											17.50	0.689	0.276	1.58	8.23	0.324	F	J
CIM025A 01	1.40	.055	1.50	.059	.25	.010	.80	.031	5.16	1.16	3.50	0.138	4.556	26.04	2.37	0.093	F	J
CIM025A 02											5.00	0.197	2.944	16.82	3.25	0.128	F	J
CIM025A 03											7.50	0.295	1.852	10.58	4.71	0.186	F	J
CIM025A 04											10.00	0.394	1.350	7.72	6.18	0.243	F	J
CIM025A 05											12.50	0.492	1.063	6.07	7.65	0.301	F	J
CIM025A 06											15.00	0.591	0.876	5.01	9.11	0.359	F	J
CIM025A 07											17.50	0.689	0.745	4.26	10.58	0.416	F	J
CIM030A 01	1.40	.055	1.50	.059	.30	.012	.70	.027	9.21	2.07	3.50	0.138	11.631	66.46	2.71	0.107	F	J
CIM030A 02											5.00	0.197	7.361	42.06	3.75	0.148	F	J
CIM030A 03											7.50	0.295	4.566	26.09	5.48	0.216	F	J
CIM030A 04											10.00	0.394	3.310	18.91	7.22	0.284	F	J
CIM030A 05											12.50	0.492	2.596	14.83	8.95	0.352	F	J
CIM030A 06											15.00	0.591	2.135	12.20	10.69	0.421	F	J
CIM030A 07											17.50	0.689	1.813	10.36	12.42	0.489	F	J
CIM020AA 01	2.00	.079	2.13	.084	.20	.008	1.50	.059	1.69	.38	3.50	0.138	0.798	4.56	1.37	0.054	F	J
CIM020AA 02											5.00	0.197	0.525	3.00	1.77	0.070	F	J
CIM020AA 03											7.50	0.295	0.335	1.91	2.43	0.096	F	J
CIM020AA 04											10.00	0.394	0.246	1.40	3.10	0.122	F	J
CIM020AA 05											12.50	0.492	0.194	1.11	3.76	0.148	F	J
CIM020AA 06											15.00	0.591	0.160	0.92	4.42	0.174	F	J
CIM020AA 07											17.50	0.689	0.137	0.78	5.08	0.200	F	J
CIM025AA 01	2.00	.079	2.13	.084	.25	.010	1.40	.055	3.38	.76	3.50	0.138	1.970	11.26	1.79	0.071	F	J
CIM025AA 02											5.00	0.197	1.273	7.27	2.36	0.093	F	J
CIM025AA 03											7.50	0.295	0.800	4.57	3.30	0.130	F	J
CIM025AA 04											10.00	0.394	0.584	3.34	4.24	0.167	F	J
CIM025AA 05											12.50	0.492	0.460	2.63	5.18	0.204	F	J
CIM025AA 06											15.00	0.591	0.379	2.16	6.12	0.241	F	J
CIM025AA 07											17.50	0.689	0.322	1.84	7.06	0.278	F	J
CIM025AA 08											20.00	0.787	0.280	1.60	8.00	0.315	F	J



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: INSTRUMENT SERIES (METRIC)

ENDS NOT GROUND • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		NOMINAL WIRE DIAMETER		TO WORK OVER ROD DIAMETER		APPROX. LOAD AT SOLID HGT.		NOMINAL FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	MM	IN.	MM	IN.	MM	IN.	MM	IN.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	M	S
CIM030AA 01	2.00	.079	2.13	.084	.30	.012	1.30	.051	5.91	1.33	3.50	0.138	4.419	25.25	2.16	0.085	F	J
CIM030AA 02											5.00	0.197	2.796	15.98	2.89	0.114	F	J
CIM030AA 03											7.50	0.295	1.735	9.91	4.09	0.161	F	J
CIM030AA 04											10.00	0.394	1.257	7.19	5.30	0.209	F	J
CIM030AA 05											12.50	0.492	0.986	5.64	6.51	0.256	F	J
CIM030AA 06											15.00	0.591	0.811	4.63	7.72	0.304	F	J
CIM030AA 07											17.50	0.689	0.689	3.94	8.92	0.351	F	J
CIM030AA 08											20.00	0.787	0.599	3.42	10.13	0.399	F	J
CIM025B 01	2.25	.089	2.40	.094	.25	.010	1.60	.063	3.50	0.79	3.50	0.138	1.740	9.96	1.60	0.063	F	J
CIM025B 02											5.00	0.197	1.130	6.44	2.00	0.079	F	J
CIM025B 03											6.50	0.256	0.830	4.76	2.40	0.094	F	J
CIM025B 04											8.00	0.315	0.660	3.78	2.80	0.110	F	J
CIM025B 05											9.50	0.374	0.550	3.13	3.20	0.126	F	J
CIM025B 06											11.00	0.433	0.470	2.67	3.60	0.142	F	J
CIM025B 07											12.50	0.492	0.410	2.33	4.00	0.157	F	J
CIM025B 08											14.00	0.551	0.360	2.07	4.45	0.175	F	J
CIM025B 09	2.50	.098	2.62	.103	.25	.010	1.85	.073	2.62	.59	15.50	0.610	0.330	1.86	4.85	0.191	F	J
CIM025B 10											17.00	0.669	0.300	1.69	5.25	0.207	F	J
CIM025B 11											19.00	0.748	0.260	1.50	5.83	0.230	F	J
CIM025C 01											3.50	0.138	1.321	7.55	1.50	0.059	F	J
CIM025C 02											5.00	0.197	0.853	4.88	1.91	0.075	F	J
CIM025C 03											7.50	0.295	0.537	3.07	2.58	0.102	F	J
CIM025C 04											10.00	0.394	0.391	2.24	3.26	0.128	F	J
CIM025C 05											12.50	0.492	0.308	1.76	3.94	0.155	F	J
CIM025C 06	2.50	.098	2.62	.103	.25	.010	1.85	.073	2.62	.59	15.00	0.591	0.254	1.45	4.62	0.182	F	J
CIM025C 07											17.50	0.689	0.216	1.23	5.29	0.208	F	J
CIM025C 08											20.00	0.787	0.188	1.07	5.97	0.235	F	J
CIM025C 09											22.50	0.886	0.166	0.95	6.65	0.262	F	J
CIM025C 10											25.00	0.984	0.149	0.85	7.32	0.288	F	J
CIM030C 01	2.50	.098	2.62	.103	.30	.012	1.78	.070	4.63	1.04	5.00	0.197	1.765	10.09	2.39	0.094	F	J
CIM030C 02											7.50	0.295	1.095	6.26	3.30	0.130	F	J
CIM030C 03											10.00	0.394	0.794	4.54	4.20	0.165	F	J
CIM030C 04											12.50	0.492	0.622	3.56	5.10	0.201	F	J
CIM030C 05											15.00	0.591	0.512	2.93	6.01	0.237	F	J
CIM030C 06											17.50	0.689	0.435	2.48	6.91	0.272	F	J
CIM030C 07											20.00	0.787	0.378	2.16	7.82	0.308	F	J
CIM030C 08											22.50	0.886	0.334	1.91	8.72	0.343	F	J
CIM030C 09											25.00	0.984	0.299	1.71	9.63	0.379	F	J

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: INSTRUMENT SERIES (METRIC)

ENDS NOT GROUND • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		NOMINAL WIRE DIAMETER		TO WORK OVER ROD DIAMETER		APPROX. LOAD AT SOLID HGT.		NOMINAL FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	MM	IN.	MM	IN.	MM	IN.	MM	IN.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	Music Wire	302 Stainless*
CIM025D 01	3.00	.118	3.12	.123	.25	.010	2.31	.091	2.14	.48	7.50	0.295	0.397	2.27	2.09	0.082	F	J
CIM025D 02											10.00	0.394	0.290	1.66	2.59	0.102	F	J
CIM025D 03											12.50	0.492	0.228	1.30	3.08	0.121	F	J
CIM025D 04											15.00	0.591	0.188	1.08	3.58	0.141	F	J
CIM025D 05											17.50	0.689	0.160	0.91	4.07	0.160	F	J
CIM025D 06											20.00	0.787	0.139	0.80	4.57	0.180	F	J
CIM025D 07											22.50	0.886	0.123	0.70	5.06	0.199	F	J
CIM025D 08											25.00	0.984	0.110	0.63	5.56	0.219	F	J
CIM025D 09											27.50	1.083	0.100	0.57	6.05	0.238	F	J
CIM025D 10											30.00	1.181	0.092	0.52	6.54	0.258	F	J
CIM030D 01	3.00	.118	3.12	.123	.30	.012	2.21	.087	3.74	.84	7.50	0.295	0.779	4.45	2.70	0.106	F	J
CIM030D 02											10.00	0.394	0.564	3.23	3.38	0.133	F	J
CIM030D 03											12.50	0.492	0.443	2.53	4.06	0.160	F	J
CIM030D 04											15.00	0.591	0.364	2.08	4.74	0.187	F	J
CIM030D 05											17.50	0.689	0.309	1.77	5.42	0.213	F	J
CIM030D 06											20.00	0.787	0.269	1.54	6.10	0.240	F	J
CIM030D 07											22.50	0.886	0.237	1.36	6.78	0.267	F	J
CIM030D 08											25.00	0.984	0.213	1.22	7.46	0.294	F	J
CIM030D 09											27.50	1.083	0.193	1.10	8.14	0.320	F	J
CIM030D 10											30.00	1.181	0.176	1.01	8.82	0.347	F	J

COMPRESSION SPRINGS



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.


PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

Introducing SPRING-I-PEDIA

Sponsored by Lee Spring

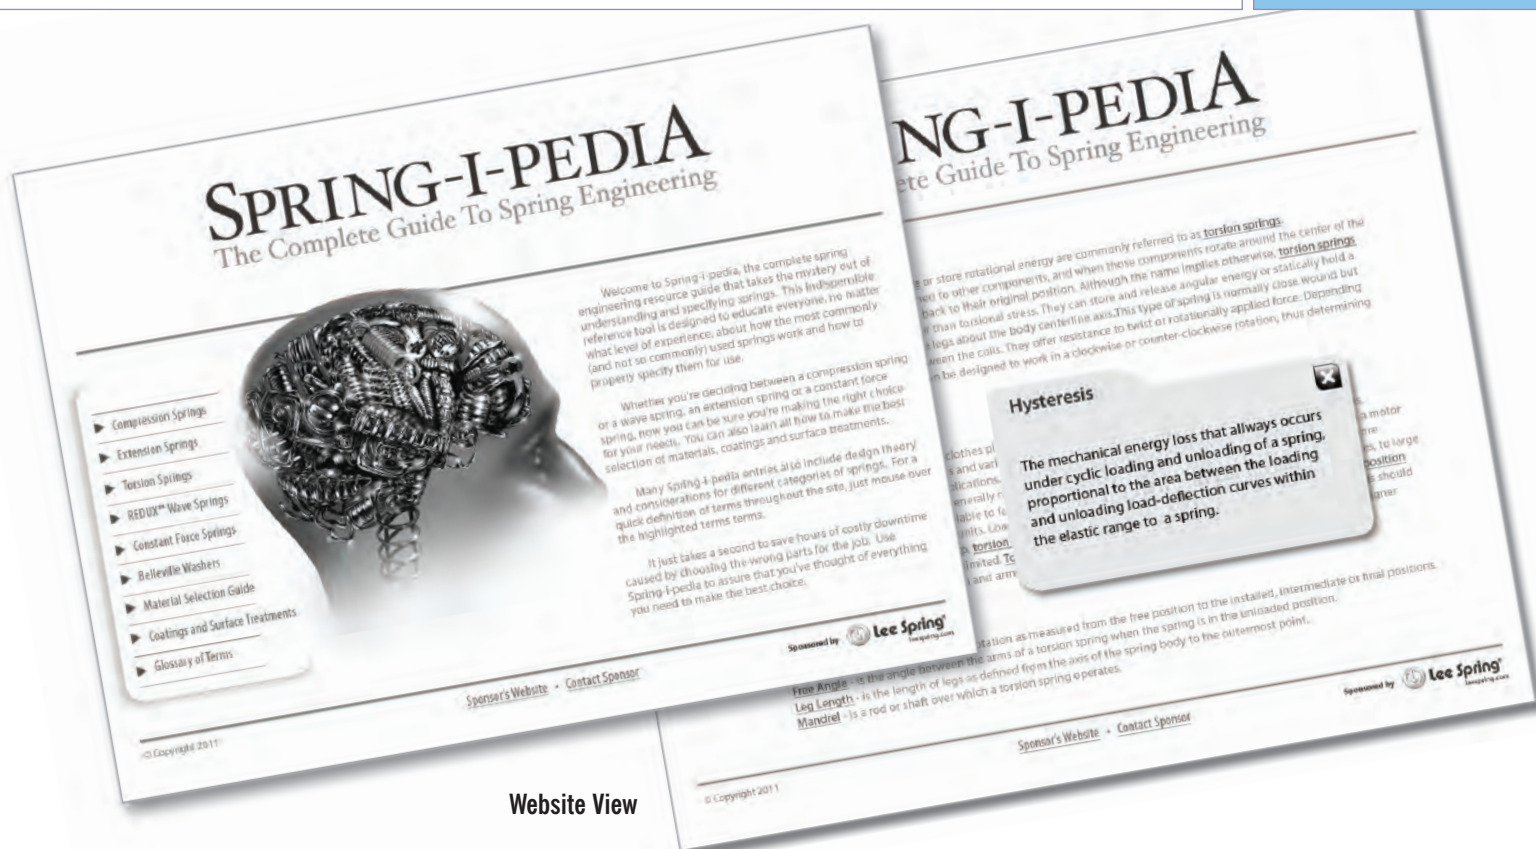

Website View

Print Version

Welcome to Spring-i-pedia, the complete spring engineering resource guide that takes the mystery out of understanding and specifying springs. This indispensable reference tool is designed to educate everyone, no matter what level of experience, about how the most commonly (and not so commonly) used springs work and how to properly specify them for use.

Whether you're deciding between a compression spring or a wave spring, an extension spring or a constant force spring, now you can be sure you're making the right choice for your needs.

You've got questions. For more than 90 years, Lee Spring has been supplying the answers.

**When you have springs
on the brain... Pick Ours!**

Lee Spring®
leespring.com

www.springipedia.com

BACKGROUND

- The Lee Spring catalog has always offered springs with relatively low spring rates or workable (maximum) loads. But often, the offered diameters (outside or inside) were too small to accommodate the intended application assembly requirements.
- This new “Lite Pressure™” Series has been developed so that, for a given length and diameter (outside or inside), there would exist a series of springs that had lower spring rates or workable load ratings than what is currently offered by the existing Lee Spring Standard Series compression springs.

WHY “PRESSURE”?

- Pressure is described as a force which is exerted over a surface area. In regards to compression springs, the pressure exerted as the result of a specific deflection can be more technically described as **force over a flat surface with a circular perimeter** (the Nominal Hole in which the spring is being used).
- The term “Lite Pressure™” is used to describe a series of springs designed to be utilized where relatively low forces are required for a given diameter.

HOW PRESSURE RATING FOR LP SERIES WOULD BE USED

- The pressure rating assigned to each item of the Lite Pressure™ series is a selection parameter to assist in meeting qualitative requirements or quantitative requirements.
- Each series is offered in a range from 1 to 5 psi pressure ratings, in 1 psi increments.

POTENTIAL APPLICATIONS

- LP series springs are ideal for many fluid power applications such as relief valves, check valves or pistons.
- Other miscellaneous applications could include motor brushes, contacts, displays, syringes, toys, dispensers and many more.

MATERIAL

- LP series springs are offered ONLY in Type 316 Stainless Steel so as to provide a design that can meet requirements in various diverse applications that call for:
 - Improved corrosion resistance
 - Enhanced cleanliness
 - Moderately elevated temperatures

SPECIFICATIONS

RELATIONSHIP TO FLUID PRESSURE

The pressure ratings used for Lite Pressure™ Series springs have no **direct** relationship with “pressure” as traditionally used in the fluid power industry, although indirectly the pressure ratings are conceptually equivalent.

Fluid pressure would be the result of a spring force acting over the specific area exposed to the fluid and would depend on other application components such as the valve face or the piston head.

PRESSURE CALCULATION EXAMPLE

Catalog spring **LP 014E 05 S316** has the following characteristics:

Nominal Hole: 0.375 inch
Free Length: 1.000 inch
Solid Height: 0.143 inch
Spring Rate: 0.161 lbs/inch

- The maximum recommended pressure for this spring will occur when the spring is at **80%** of **maximum available deflection** (it is not generally recommended to use a compression spring all the way down to solid height).
- The **maximum available deflection** is the difference between the Free Length (1.000) and the Solid Height (0.143) or $1.000 - 0.143 = 0.857$ inch.
- 80% of that would be $0.857 \times 80\% = 0.686$ inch.

- The calculated load at this deflection would be the deflection (0.686) times the Spring Rate (0.161) or $0.686 \text{ inch} \times 0.161 \text{ lbs/inch} = 0.110 \text{ lbs}$.
- The surface area over the Nominal Hole diameter (0.375) would be $\pi (\pi)$ times the diameter squared divided by four or $\pi (\pi) \times (0.375^2) / 4 = 0.110 \text{ in}^2$.
- The resultant pressure would then be determined by dividing the calculated load by the surface area or $0.110 \text{ lbs} / 0.110 \text{ in}^2 = 1 \text{ lb/in}^2$ (psi).

MATERIAL

- Type 316 Stainless Steel

FINISH

- Passivated per ASTM A967
- Ultrasonically cleaned

Tolerances on Spring Rate: $\pm 10\%$

Tolerances on Outside Diameter (for LP Series only):

0.201"	—	0.300"	$\pm 0.008"$
0.301"	—	0.500"	$\pm 0.010"$
0.501"	—	0.850"	$\pm 0.020"$
0.851"	—	1.125"	$\pm 0.025"$
1.126"	—	1.460"	$\pm 0.030"$
1.461"	—	1.625"	$\pm 0.040"$

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 008A 01	.218	5.54	.234	5.94	.156	3.97	.008	.20	1	7	.054	.024	0.313	7.95	0.201	0.004	0.046	1.17	N
LP 008A 02													0.500	12.70	0.122	0.002	0.060	1.53	N
LP 008A 03													0.625	15.88	0.097	0.002	0.070	1.77	N
LP 008A 04													0.750	19.05	0.080	0.001	0.079	2.01	N
LP 008A 05													1.000	25.40	0.060	0.001	0.098	2.49	N
LP 008A 06													1.250	31.75	0.047	0.001	0.117	2.98	N
LP 010A 01	.218	5.54	.234	5.94	.156	3.97	.010	.25	2	14	.108	.049	0.313	7.95	0.429	0.008	0.062	1.58	N
LP 010A 02													0.500	12.70	0.258	0.005	0.084	2.13	N
LP 010A 03													0.625	15.88	0.204	0.004	0.098	2.49	N
LP 010A 04													0.750	19.05	0.169	0.003	0.112	2.85	N
LP 010A 05													1.000	25.40	0.125	0.002	0.141	3.58	N
LP 010A 06													1.250	31.75	0.100	0.002	0.170	4.31	N
LP 011A 01	.218	5.54	.234	5.94	.156	3.97	.011	.28	3	21	.161	.073	0.313	7.95	0.657	0.012	0.068	1.72	N
LP 011A 02													0.500	12.70	0.394	0.007	0.091	2.30	N
LP 011A 03													0.625	15.88	0.311	0.006	0.106	2.69	N
LP 011A 04													0.750	19.05	0.257	0.005	0.121	3.09	N
LP 011A 05													1.000	25.40	0.190	0.003	0.152	3.87	N
LP 011A 06													1.250	31.75	0.151	0.003	0.183	4.65	N
LP 012A 01	.218	5.54	.234	5.94	.156	3.97	.012	.30	4	28	.215	.098	0.313	7.95	0.905	0.016	0.075	1.91	N
LP 012A 02													0.500	12.70	0.540	0.010	0.102	2.59	N
LP 012A 03													0.625	15.88	0.425	0.008	0.120	3.04	N
LP 012A 04													0.750	19.05	0.351	0.006	0.137	3.49	N
LP 012A 05													1.000	25.40	0.260	0.005	0.173	4.39	N
LP 012A 06													1.250	31.75	0.206	0.004	0.208	5.29	N
LP 013A 01	.218	5.54	.234	5.94	.156	3.97	.013	.33	5	35	.269	.122	0.313	7.95	0.981	0.018	0.094	2.39	N
LP 013A 02													0.500	12.70	0.583	0.010	0.131	3.34	N
LP 013A 03													0.625	15.88	0.459	0.008	0.156	3.97	N
LP 013A 04													0.750	19.05	0.378	0.007	0.181	4.61	N
LP 013A 05													1.000	25.40	0.280	0.005	0.232	5.88	N
LP 013A 06													1.250	31.75	0.222	0.004	0.282	7.15	N
LP 010B 01	.240	6.10	.250	6.35	.188	4.76	.010	.25	1	7	.061	.028	0.313	7.95	0.253	0.005	0.071	1.79	N
LP 010B 02													0.500	12.70	0.152	0.003	0.097	2.47	N
LP 010B 03													0.625	15.88	0.120	0.002	0.115	2.93	N
LP 010B 04													0.750	19.05	0.099	0.002	0.133	3.39	N
LP 010B 05													1.000	25.40	0.074	0.001	0.169	4.30	N
LP 010B 06													1.250	31.75	0.059	0.001	0.205	5.21	N
LP 011B 01	.240	6.10	.250	6.35	.188	4.76	.011	.28	2	14	.123	.056	0.313	7.95	0.498	0.009	0.067	1.69	N
LP 011B 02													0.500	12.70	0.299	0.005	0.089	2.26	N
LP 011B 03													0.625	15.88	0.236	0.004	0.104	2.65	N
LP 011B 04													0.750	19.05	0.195	0.003	0.119	3.03	N
LP 011B 05													1.000	25.40	0.144	0.003	0.149	3.79	N
LP 011B 06													1.250	31.75	0.115	0.002	0.179	4.55	N

SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES


PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 012B 01	.240	6.10	.250	6.35	.188	4.76	.012	.30	3	21	.184	.083	0.313	7.95	0.759	0.014	0.071	1.79	N
LP 012B 02													0.500	12.70	0.453	0.008	0.094	2.39	N
LP 012B 03													0.625	15.88	0.357	0.006	0.109	2.78	N
LP 012B 04													0.750	19.05	0.295	0.005	0.125	3.18	N
LP 012B 05													1.000	25.40	0.218	0.004	0.156	3.97	N
LP 012B 06													1.250	31.75	0.173	0.003	0.187	4.76	N
LP 013B 01	.240	6.10	.250	6.35	.188	4.76	.013	.33	4	28	.245	.111	0.313	7.95	1.041	0.019	0.077	1.96	N
LP 013B 02													0.500	12.70	0.618	0.011	0.103	2.62	N
LP 013B 03													0.625	15.88	0.487	0.009	0.121	3.06	N
LP 013B 04													0.750	19.05	0.401	0.007	0.138	3.50	N
LP 013B 05													1.000	25.40	0.297	0.005	0.173	4.39	N
LP 013B 06													1.250	31.75	0.235	0.004	0.208	5.27	N
LP 014B 01	.240	6.10	.250	6.35	.188	4.76	.014	.36	5	35	.307	.139	0.313	7.95	1.121	0.020	0.094	2.39	N
LP 014B 02													0.500	12.70	0.663	0.012	0.130	3.30	N
LP 014B 03													0.625	15.88	0.521	0.009	0.154	3.91	N
LP 014B 04													0.750	19.05	0.429	0.008	0.178	4.52	N
LP 014B 05													1.000	25.40	0.317	0.006	0.226	5.73	N
LP 014B 06													1.250	31.75	0.251	0.004	0.274	6.95	N
LP 010BC 01	.265	6.73	.281	7.14	.219	5.56	.010	.25	1.5	10	.103	.047	0.313	7.95	0.392	0.007	0.049	1.25	N
LP 010BC 02													0.500	12.70	0.236	0.004	0.062	1.57	N
LP 010BC 03													0.625	15.88	0.186	0.003	0.070	1.79	N
LP 010BC 04													0.750	19.05	0.154	0.003	0.079	2.00	N
LP 010BC 05													1.000	25.40	0.114	0.002	0.096	2.44	N
LP 010BC 06													1.250	31.75	0.091	0.002	0.113	2.87	N
LP 012BC 01	.265	6.73	.281	7.14	.219	5.56	.012	.30	2.5	17	.172	.078	0.313	7.95	0.692	0.012	0.064	1.62	N
LP 012BC 02													0.500	12.70	0.413	0.007	0.083	2.10	N
LP 012BC 03													0.625	15.88	0.325	0.006	0.095	2.41	N
LP 012BC 04													0.750	19.05	0.268	0.005	0.108	2.73	N
LP 012BC 05													1.000	25.40	0.199	0.004	0.133	3.37	N
LP 012BC 06													1.250	31.75	0.158	0.003	0.158	4.01	N
LP 013BC 01	.265	6.73	.281	7.14	.219	5.56	.013	.33	3.5	24	.241	.109	0.313	7.95	0.987	0.018	0.068	1.74	N
LP 013BC 02													0.500	12.70	0.586	0.010	0.088	2.25	N
LP 013BC 03													0.625	15.88	0.461	0.008	0.102	2.59	N
LP 013BC 04													0.750	19.05	0.380	0.007	0.115	2.93	N
LP 013BC 05													1.000	25.40	0.281	0.005	0.142	3.61	N
LP 013BC 06													1.250	31.75	0.223	0.004	0.169	4.29	N
LP 014BC 01	.265	6.73	.281	7.14	.219	5.56	.014	.36	4.5	31	.310	.141	0.313	7.95	1.302	0.023	0.075	1.90	N
LP 014BC 02													0.500	12.70	0.770	0.014	0.097	2.47	N
LP 014BC 03													0.625	15.88	0.605	0.011	0.112	2.85	N
LP 014BC 04													0.750	19.05	0.498	0.009	0.127	3.23	N
LP 014BC 05													1.000	25.40	0.368	0.007	0.157	4.00	N
LP 014BC 06													1.250	31.75	0.292	0.005	0.188	4.76	N

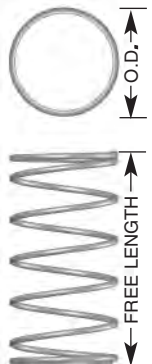

SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES

PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 016BC 01	.265	6.73	.281	7.14	.188	4.76	.016	.41	5.5	38	.379	.172	0.313	7.95	1.751	0.031	0.096	2.45	N
LP 016BC 02													0.500	12.70	1.027	0.018	0.131	3.32	N
LP 016BC 03													0.625	15.88	0.804	0.014	0.154	3.90	N
LP 016BC 04													0.750	19.05	0.661	0.012	0.176	4.48	N
LP 016BC 05													1.000	25.40	0.487	0.009	0.222	5.64	N
LP 016BC 06													1.250	31.75	0.386	0.007	0.268	6.80	N
LP 011C 01	.300	7.62	.313	7.95	.250	6.35	.011	.28	1	7	.096	.044	0.313	7.95	0.373	0.007	0.055	1.41	N
LP 011C 02													0.500	12.70	0.224	0.004	0.070	1.79	N
LP 011C 03													0.625	15.88	0.177	0.003	0.080	2.04	N
LP 011C 04													0.750	19.05	0.146	0.003	0.090	2.29	N
LP 011C 05													1.000	25.40	0.108	0.002	0.110	2.80	N
LP 011C 06													1.250	31.75	0.086	0.002	0.130	3.31	N
LP 012C 01	.300	7.62	.313	7.95	.250	6.35	.012	.30	2	14	.192	.087	0.313	7.95	0.741	0.013	0.054	1.36	N
LP 012C 02													0.500	12.70	0.443	0.008	0.065	1.66	N
LP 012C 03													0.625	15.88	0.349	0.006	0.073	1.86	N
LP 012C 04													0.750	19.05	0.288	0.005	0.081	2.06	N
LP 012C 05													1.000	25.40	0.213	0.004	0.097	2.47	N
LP 012C 06													1.250	31.75	0.169	0.003	0.113	2.87	N
LP 013C 01	.300	7.62	.313	7.95	.250	6.35	.013	.33	3	21	.289	.131	0.313	7.95	1.125	0.020	0.056	1.43	N
LP 013C 02													0.500	12.70	0.668	0.012	0.068	1.74	N
LP 013C 03													0.625	15.88	0.526	0.009	0.076	1.94	N
LP 013C 04													0.750	19.05	0.433	0.008	0.084	2.14	N
LP 013C 05													1.000	25.40	0.321	0.006	0.100	2.55	N
LP 013C 06													1.250	31.75	0.254	0.005	0.116	2.95	N
LP 014C 01	.300	7.62	.313	7.95	.250	6.35	.014	.36	4	28	.385	.174	0.313	7.95	1.526	0.027	0.061	1.55	N
LP 014C 02													0.500	12.70	0.903	0.016	0.074	1.88	N
LP 014C 03													0.625	15.88	0.709	0.013	0.083	2.10	N
LP 014C 04													0.750	19.05	0.584	0.010	0.091	2.32	N
LP 014C 05													1.000	25.40	0.432	0.008	0.109	2.76	N
LP 014C 06													1.250	31.75	0.342	0.006	0.126	3.20	N
LP 016C 01	.300	7.62	.313	7.95	.250	6.35	.016	.41	5	35	.481	.218	0.313	7.95	1.668	0.030	0.082	2.09	N
LP 016C 02													0.500	12.70	0.978	0.017	0.107	2.71	N
LP 016C 03													0.625	15.88	0.766	0.014	0.123	3.12	N
LP 016C 04													0.750	19.05	0.630	0.011	0.139	3.53	N
LP 016C 05													1.000	25.40	0.464	0.008	0.171	4.35	N
LP 016C 06													1.250	31.75	0.368	0.007	0.204	5.17	N
LP 013D 01	.312	7.92	.328	8.33	.250	6.35	.013	.33	1	7	.106	.048	0.313	7.95	0.449	0.008	0.078	1.97	N
LP 013D 02													0.500	12.70	0.267	0.005	0.104	2.64	N
LP 013D 03													0.625	15.88	0.210	0.004	0.122	3.09	N
LP 013D 04													0.750	19.05	0.173	0.003	0.139	3.54	N
LP 013D 05													1.000	25.40	0.128	0.002	0.175	4.44	N
LP 013D 06													1.250	31.75	0.102	0.002	0.210	5.33	N

SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES


PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 014D 01													0.313	7.95	0.873	0.016	0.071	1.81	N
LP 014D 02													0.500	12.70	0.517	0.009	0.091	2.32	N
LP 014D 03	.312	7.92	.328	8.33	.250	6.35	.014	.36	2	14	.211	.096	0.625	15.88	0.406	0.007	0.105	2.66	N
LP 014D 04													0.750	19.05	0.334	0.006	0.118	3.00	N
LP 014D 05													1.000	25.40	0.247	0.004	0.145	3.68	N
LP 014D 06													1.250	31.75	0.196	0.003	0.172	4.36	N
LP 016D 01													0.313	7.95	1.386	0.025	0.084	2.15	N
LP 016D 02													0.500	12.70	0.813	0.015	0.110	2.80	N
LP 016D 03	.312	7.92	.328	8.33	.250	6.35	.016	.41	3	21	.317	.144	0.625	15.88	0.637	0.011	0.127	3.24	N
LP 016D 04													0.750	19.05	0.523	0.009	0.145	3.67	N
LP 016D 05													1.000	25.40	0.386	0.007	0.179	4.55	N
LP 016D 06													1.250	31.75	0.306	0.005	0.213	5.42	N
LP 018D 01													0.313	7.95	1.990	0.036	0.101	2.56	N
LP 018D 02													0.500	12.70	1.156	0.021	0.134	3.41	N
LP 018D 03	.312	7.92	.328	8.33	.250	6.35	.018	.46	4	28	.422	.192	0.625	15.88	0.903	0.016	0.157	3.99	N
LP 018D 04													0.750	19.05	0.741	0.013	0.180	4.56	N
LP 018D 05													1.000	25.40	0.545	0.010	0.225	5.71	N
LP 018D 06													1.250	31.75	0.431	0.008	0.270	6.85	N
LP 020D 01													0.313	7.95	2.722	0.049	0.119	3.02	N
LP 020D 02													0.500	12.70	1.565	0.028	0.163	4.13	N
LP 020D 03	.312	7.92	.328	8.33	.250	6.35	.020	.51	5	35	.528	.240	0.625	15.88	1.219	0.022	0.192	4.87	N
LP 020D 04													0.750	19.05	0.998	0.018	0.221	5.61	N
LP 020D 05													1.000	25.40	0.733	0.013	0.279	7.09	N
LP 020D 06													1.250	31.75	0.579	0.010	0.338	8.58	N
LP 013DE 01													0.500	12.70	0.379	0.007	0.077	1.97	N
LP 013DE 02													0.625	15.88	0.299	0.005	0.088	2.23	N
LP 013DE 03	.330	8.38	.344	8.74	.281	7.14	.013	.33	1.5	10	.160	.073	0.750	19.05	0.246	0.004	0.098	2.49	N
LP 013DE 04													0.875	22.23	0.209	0.004	0.109	2.76	N
LP 013DE 05													1.000	25.40	0.182	0.003	0.119	3.02	N
LP 013DE 06													1.250	31.75	0.144	0.003	0.140	3.55	N
LP 014DE 01													0.500	12.70	0.630	0.011	0.076	1.93	N
LP 014DE 02													0.625	15.88	0.495	0.009	0.085	2.16	N
LP 014DE 03	.330	8.38	.344	8.74	.281	7.14	.014	.36	2.5	17	.267	.121	0.750	19.05	0.408	0.007	0.094	2.39	N
LP 014DE 04													0.875	22.23	0.346	0.006	0.103	2.63	N
LP 014DE 05													1.000	25.40	0.301	0.005	0.113	2.86	N
LP 014DE 06													1.250	31.75	0.239	0.004	0.131	3.33	N
LP 016DE 01													0.500	12.70	0.922	0.016	0.094	2.39	N
LP 016DE 02													0.625	15.88	0.722	0.013	0.107	2.71	N
LP 016DE 03	.330	8.38	.344	8.74	.281	7.14	.016	.41	3.5	24	.374	.170	0.750	19.05	0.593	0.011	0.119	3.03	N
LP 016DE 04													0.875	22.23	0.504	0.009	0.132	3.35	N
LP 016DE 05													1.000	25.40	0.438	0.008	0.145	3.68	N
LP 016DE 06													1.250	31.75	0.347	0.006	0.170	4.32	N

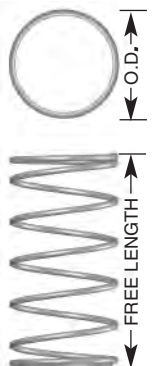

SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES

PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 018DE 01	.330	8.38	.344	8.74	.250	6.35	.018	.46	4.5	31	.481	.218	0.500	12.70	1.253	0.022	0.116	2.95	N
LP 018DE 02													0.625	15.88	0.979	0.017	0.133	3.39	N
LP 018DE 03													0.750	19.05	0.803	0.014	0.151	3.83	N
LP 018DE 04													0.875	22.23	0.681	0.012	0.168	4.27	N
LP 018DE 05													1.000	25.40	0.591	0.011	0.186	4.72	N
LP 018DE 06													1.250	31.75	0.467	0.008	0.220	5.60	N
LP 020DE 01	.330	8.38	.344	8.74	.250	6.35	.020	.51	5.5	38	.588	.267	0.500	12.70	1.642	0.029	0.142	3.60	N
LP 020DE 02													0.625	15.88	1.278	0.023	0.165	4.19	N
LP 020DE 03													0.750	19.05	1.047	0.019	0.188	4.78	N
LP 020DE 04													0.875	22.23	0.886	0.016	0.212	5.37	N
LP 020DE 05													1.000	25.40	0.768	0.014	0.235	5.96	N
LP 020DE 06													1.250	31.75	0.607	0.011	0.281	7.14	N
LP 014E 01	.360	9.14	.375	9.53	.313	7.94	.014	.36	1	7	.138	.063	0.500	12.70	0.337	0.006	0.090	2.29	N
LP 014E 02													0.625	15.88	0.265	0.005	0.103	2.63	N
LP 014E 03													0.750	19.05	0.218	0.004	0.116	2.96	N
LP 014E 04													0.875	22.23	0.185	0.003	0.130	3.29	N
LP 014E 05													1.000	25.40	0.161	0.003	0.143	3.63	N
LP 014E 06													1.250	31.75	0.128	0.002	0.169	4.29	N
LP 016E 01	.360	9.14	.375	9.53	.313	7.94	.016	.41	2	14	.276	.125	0.500	12.70	0.682	0.012	0.095	2.42	N
LP 016E 02													0.625	15.88	0.534	0.010	0.108	2.75	N
LP 016E 03													0.750	19.05	0.439	0.008	0.121	3.08	N
LP 016E 04													0.875	22.23	0.373	0.007	0.134	3.41	N
LP 016E 05													1.000	25.40	0.324	0.006	0.147	3.74	N
LP 016E 06													1.250	31.75	0.257	0.005	0.174	4.41	N
LP 018E 01	.360	9.14	.375	9.53	.281	7.14	.018	.46	3	21	.414	.188	0.500	12.70	1.061	0.019	0.110	2.79	N
LP 018E 02													0.625	15.88	0.829	0.015	0.125	3.18	N
LP 018E 03													0.750	19.05	0.680	0.012	0.141	3.58	N
LP 018E 04													0.875	22.23	0.576	0.010	0.156	3.97	N
LP 018E 05													1.000	25.40	0.500	0.009	0.172	4.37	N
LP 018E 06													1.250	31.75	0.396	0.007	0.203	5.16	N
LP 020E 01	.360	9.14	.375	9.53	.281	7.14	.020	.51	4	28	.552	.250	0.500	12.70	1.486	0.027	0.128	3.26	N
LP 020E 02													0.625	15.88	1.158	0.021	0.148	3.76	N
LP 020E 03													0.750	19.05	0.948	0.017	0.167	4.25	N
LP 020E 04													0.875	22.23	0.802	0.014	0.187	4.75	N
LP 020E 05													1.000	25.40	0.696	0.012	0.206	5.24	N
LP 020E 06													1.250	31.75	0.550	0.010	0.245	6.23	N
LP 022E 01	.360	9.14	.375	9.53	.281	7.14	.022	.56	5	35	.690	.313	0.500	12.70	1.975	0.035	0.150	3.82	N
LP 022E 02													0.625	15.88	1.533	0.027	0.175	4.44	N
LP 022E 03													0.750	19.05	1.253	0.022	0.199	5.06	N
LP 022E 04													0.875	22.23	1.059	0.019	0.223	5.68	N
LP 022E 05													1.000	25.40	0.918	0.016	0.248	6.29	N
LP 022E 06													1.250	31.75	0.724	0.013	0.296	7.53	N

SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES


PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 016F 01	.375	9.53	.391	9.93	.313	7.94	.016	.41	1	7	.150	.068	0.500	12.70	0.395	0.007	0.120	3.04	N
LP 016F 02													0.625	15.88	0.309	0.006	0.140	3.55	N
LP 016F 03													0.750	19.05	0.254	0.005	0.159	4.05	N
LP 016F 04													0.875	22.23	0.216	0.004	0.179	4.55	N
LP 016F 05													1.000	25.40	0.187	0.003	0.199	5.06	N
LP 016F 06													1.250	31.75	0.148	0.003	0.239	6.07	N
LP 018F 01	.375	9.53	.391	9.93	.313	7.94	.018	.46	2	14	.30	.136	0.500	12.70	0.789	0.014	0.120	3.04	N
LP 018F 02													0.625	15.88	0.617	0.011	0.138	3.51	N
LP 018F 03													0.750	19.05	0.506	0.009	0.157	3.98	N
LP 018F 04													0.875	22.23	0.429	0.008	0.175	4.45	N
LP 018F 05													1.000	25.40	0.372	0.007	0.193	4.91	N
LP 018F 06													1.250	31.75	0.294	0.005	0.230	5.85	N
LP 020F 01	.375	9.53	.391	9.93	.313	7.94	.020	.51	3	21	.450	.204	0.500	12.70	1.227	0.022	0.133	3.38	N
LP 020F 02													0.625	15.88	0.955	0.017	0.154	3.90	N
LP 020F 03													0.750	19.05	0.782	0.014	0.174	4.43	N
LP 020F 04													0.875	22.23	0.662	0.012	0.195	4.95	N
LP 020F 05													1.000	25.40	0.574	0.010	0.216	5.48	N
LP 020F 06													1.250	31.75	0.454	0.008	0.257	6.53	N
LP 022F 01	.375	9.53	.391	9.93	.313	7.94	.022	.56	4	28	.60	.272	0.500	12.70	1.721	0.031	0.151	3.84	N
LP 022F 02													0.625	15.88	1.336	0.024	0.176	4.46	N
LP 022F 03													0.750	19.05	1.092	0.019	0.200	5.08	N
LP 022F 04													0.875	22.23	0.923	0.016	0.225	5.71	N
LP 022F 05													1.000	25.40	0.800	0.014	0.249	6.33	N
LP 022F 06													1.250	31.75	0.631	0.011	0.298	7.57	N
LP 024F 01	.375	9.53	.391	9.93	.281	7.14	.024	.61	5	35	.750	.340	0.500	12.70	2.291	0.041	0.172	4.38	N
LP 024F 02													0.625	15.88	1.773	0.032	0.202	5.13	N
LP 024F 03													0.750	19.05	1.446	0.026	0.231	5.87	N
LP 024F 04													0.875	22.23	1.221	0.022	0.260	6.62	N
LP 024F 05													1.000	25.40	1.057	0.019	0.290	7.36	N
LP 024F 06													1.250	31.75	0.832	0.015	0.348	8.85	N
LP 016FG 01	.390	9.91	.406	10.31	.313	7.94	.016	.41	1.5	10	.224	.102	0.500	12.70	0.551	0.010	0.093	2.37	N
LP 016FG 02													0.625	15.88	0.432	0.008	0.106	2.69	N
LP 016FG 03													0.750	19.05	0.355	0.006	0.119	3.01	N
LP 016FG 04													0.875	22.23	0.301	0.005	0.131	3.33	N
LP 016FG 05													1.000	25.40	0.262	0.005	0.144	3.65	N
LP 016FG 06													1.250	31.75	0.207	0.004	0.169	4.29	P
LP 018FG 01	.390	9.91	.406	10.31	.313	7.94	.018	.46	2.5	17	.373	.169	0.500	12.70	0.940	0.017	0.103	2.61	N
LP 018FG 02													0.625	15.88	0.734	0.013	0.116	2.96	N
LP 018FG 03													0.750	19.05	0.602	0.011	0.130	3.31	N
LP 018FG 04													0.875	22.23	0.511	0.009	0.144	3.65	N
LP 018FG 05													1.000	25.40	0.443	0.008	0.158	4.00	N
LP 018FG 06													1.250	31.75	0.350	0.006	0.185	4.70	P

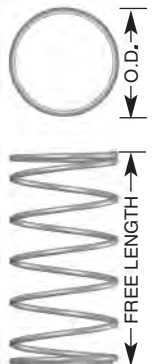

SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES

PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 020FG 01	.390	9.91	.406	10.31	.313	7.94	.020	.51	3.5	24	.523	.237	0.500	12.70	1.367	0.024	0.118	2.99	N
LP 020FG 02													0.625	15.88	1.065	0.019	0.134	3.41	N
LP 020FG 03													0.750	19.05	0.872	0.016	0.151	3.82	N
LP 020FG 04													0.875	22.23	0.738	0.013	0.167	4.24	N
LP 020FG 05													1.000	25.40	0.640	0.011	0.183	4.66	N
LP 020FG 06													1.250	31.75	0.506	0.009	0.216	5.49	P
LP 022FG 01	.390	9.91	.406	10.31	.313	7.94	.022	.56	4.5	31	.672	.305	0.500	12.70	1.846	0.033	0.136	3.45	N
LP 022FG 02													0.625	15.88	1.433	0.026	0.156	3.97	N
LP 022FG 03													0.750	19.05	1.171	0.021	0.176	4.48	N
LP 022FG 04													0.875	22.23	0.990	0.018	0.197	4.99	N
LP 022FG 05													1.000	25.40	0.858	0.015	0.217	5.50	N
LP 022FG 06													1.250	31.75	0.677	0.012	0.257	6.53	P
LP 024FG 01	0.390	9.91	.406	10.31	.313	7.94	.024	.61	5.5	38	.821	.373	0.500	12.70	2.393	0.043	0.157	3.98	N
LP 024FG 02													0.625	15.88	1.852	0.033	0.182	4.61	N
LP 024FG 03													0.750	19.05	1.511	0.027	0.206	5.24	N
LP 024FG 04													0.875	22.23	1.276	0.023	0.231	5.87	N
LP 024FG 05													1.000	25.40	1.104	0.020	0.256	6.50	N
LP 024FG 06													1.250	31.75	0.870	0.016	0.305	7.76	P
LP 018G 01	.420	10.67	.438	11.13	.344	8.73	.018	.46	1	7	.188	.085	0.500	12.70	0.504	0.009	0.126	3.21	N
LP 018G 02													0.625	15.88	0.394	0.007	0.146	3.72	N
LP 018G 03													0.750	19.05	0.323	0.006	0.167	4.23	N
LP 018G 04													0.875	22.23	0.274	0.005	0.187	4.75	N
LP 018G 05													1.000	25.40	0.238	0.004	0.207	5.26	N
LP 018G 06													1.250	31.75	0.188	0.003	0.248	6.29	P
LP 020G 01	.420	10.67	.438	11.13	.344	8.73	.020	.51	2	14	.377	.171	0.500	12.70	0.998	0.018	0.123	3.11	N
LP 020G 02													0.625	15.88	0.777	0.014	0.140	3.57	N
LP 020G 03													0.750	19.05	0.636	0.011	0.158	4.02	N
LP 020G 04													0.875	22.23	0.539	0.010	0.176	4.47	N
LP 020G 05													1.000	25.40	0.467	0.008	0.194	4.92	N
LP 020G 06													1.250	31.75	0.369	0.007	0.229	5.83	P
LP 022G 01	.420	10.67	.438	11.13	.344	8.73	.022	.56	3	21	.565	.256	0.500	12.70	1.537	0.027	0.132	3.37	N
LP 022G 02													0.625	15.88	1.194	0.021	0.152	3.85	N
LP 022G 03													0.750	19.05	0.975	0.017	0.171	4.34	N
LP 022G 04													0.875	22.23	0.825	0.015	0.190	4.82	N
LP 022G 05													1.000	25.40	0.714	0.013	0.209	5.31	N
LP 022G 06													1.250	31.75	0.564	0.010	0.247	6.28	P
LP 024G 01	.420	10.67	.438	11.13	.344	8.73	.024	.61	4	28	.753	.342	0.500	12.70	2.135	0.038	0.147	3.74	N
LP 024G 02													0.625	15.88	1.652	0.029	0.169	4.29	N
LP 024G 03													0.750	19.05	1.348	0.024	0.191	4.85	N
LP 024G 04													0.875	22.23	1.138	0.020	0.213	5.41	N
LP 024G 05													1.000	25.40	0.985	0.018	0.235	5.96	N
LP 024G 06													1.250	31.75	0.776	0.014	0.279	7.08	P

SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES


PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 026G 01													0.500	12.70	2.807	0.050	0.165	4.18	N
LP 026G 02													0.625	15.88	2.166	0.039	0.190	4.83	N
LP 026G 03	.420	10.67	.438	11.13	.344	8.73	.026	.66	5	35	.942	.427	0.750	19.05	1.763	0.031	0.216	5.48	N
LP 026G 04													0.875	22.23	1.486	0.027	0.241	6.13	N
LP 026G 05													1.000	25.40	1.285	0.023	0.267	6.78	N
LP 026G 06													1.250	31.75	1.011	0.018	0.318	8.08	P
LP 018GH 01													0.750	19.05	0.452	0.008	0.125	3.16	P
LP 018GH 02													1.000	25.40	0.332	0.006	0.150	3.81	P
LP 018GH 03	.438	11.13	.453	11.51	.375	9.53	.018	.46	1.5	10	.283	.128	1.250	31.75	0.263	0.005	0.175	4.45	P
LP 018GH 04													1.500	38.10	0.217	0.004	0.201	5.10	P
LP 018GH 05													1.750	44.45	0.185	0.003	0.226	5.74	P
LP 018GH 06													2.000	50.80	0.162	0.003	0.251	6.38	P
LP 020GH 01													0.750	19.05	0.762	0.014	0.132	3.35	P
LP 020GH 02													1.000	25.40	0.559	0.010	0.158	4.01	P
LP 020GH 03	.438	11.13	.453	11.51	.375	9.53	.020	.51	2.5	17	.471	.214	1.250	31.75	0.442	0.008	0.184	4.67	P
LP 020GH 04													1.500	38.10	0.365	0.007	0.210	5.34	P
LP 020GH 05													1.750	44.45	0.311	0.006	0.236	6.00	P
LP 020GH 06													2.000	50.80	0.271	0.005	0.262	6.66	P
LP 022GH 01													0.750	19.05	1.095	0.020	0.148	3.75	P
LP 022GH 02													1.000	25.40	0.802	0.014	0.178	4.51	P
LP 022GH 03	.438	11.13	.453	11.51	.375	9.53	.022	.56	3.5	24	.659	.299	1.250	31.75	0.632	0.011	0.208	5.27	P
LP 022GH 04													1.500	38.10	0.522	0.009	0.237	6.03	P
LP 022GH 05													1.750	44.45	0.445	0.008	0.267	6.79	P
LP 022GH 06													2.000	50.80	0.387	0.007	0.297	7.55	P
LP 024GH 01													0.750	19.05	1.457	0.026	0.168	4.27	P
LP 024GH 02													1.000	25.40	1.064	0.019	0.204	5.18	P
LP 024GH 03	.438	11.13	.453	11.51	.375	9.53	.024	.61	4.5	31	.848	.384	1.250	31.75	0.839	0.015	0.239	6.08	P
LP 024GH 04													1.500	38.10	0.692	0.012	0.275	6.98	P
LP 024GH 05													1.750	44.45	0.589	0.011	0.310	7.88	P
LP 024GH 06													2.000	50.80	0.512	0.009	0.346	8.78	P
LP 026GH 01													0.750	19.05	1.858	0.033	0.192	4.89	P
LP 026GH 02													1.000	25.40	1.354	0.024	0.235	5.97	P
LP 026GH 03	.438	11.13	.453	11.51	.344	8.73	.026	.66	5.5	38	1.036	.470	1.250	31.75	1.065	0.019	0.277	7.05	P
LP 026GH 04													1.500	38.10	0.878	0.016	0.320	8.13	P
LP 026GH 05													1.750	44.45	0.747	0.013	0.362	9.21	P
LP 026GH 06													2.000	50.80	0.649	0.012	0.405	10.29	P
LP 018H 01													0.750	19.05	0.351	0.006	0.135	3.42	P
LP 018H 02													1.000	25.40	0.258	0.005	0.164	4.16	P
LP 018H 03	.455	11.56	.469	11.91	.375	9.53	.018	.46	1	7	.216	.098	1.250	31.75	0.204	0.004	0.193	4.89	P
LP 018H 04													1.500	38.10	0.169	0.003	0.222	5.63	P
LP 018H 05													1.750	44.45	0.144	0.003	0.251	6.36	P
LP 018H 06													2.000	50.80	0.126	0.002	0.279	7.10	P

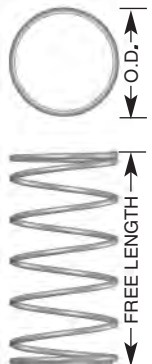

SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES

PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 020H 01	.455	11.56	.469	11.91	.375	9.53	.020	.51	2	14	.432	.196	0.750	19.05	0.696	0.012	0.130	3.30	P
LP 020H 02													1.000	25.40	0.511	0.009	0.155	3.94	P
LP 020H 03													1.250	31.75	0.404	0.007	0.180	4.58	P
LP 020H 04													1.500	38.10	0.334	0.006	0.206	5.22	P
LP 020H 05													1.750	44.45	0.284	0.005	0.231	5.87	P
LP 020H 06													2.000	50.80	0.248	0.004	0.256	6.51	P
LP 022H 01	.455	11.56	.469	11.91	.375	9.53	.022	.56	3	21	.648	.294	0.750	19.05	1.063	0.019	0.141	3.57	P
LP 022H 02													1.000	25.40	0.779	0.014	0.168	4.27	P
LP 022H 03													1.250	31.75	0.614	0.011	0.195	4.96	P
LP 022H 04													1.500	38.10	0.507	0.009	0.222	5.65	P
LP 022H 05													1.750	44.45	0.432	0.008	0.250	6.34	P
LP 022H 06													2.000	50.80	0.376	0.007	0.277	7.04	P
LP 024H 01	.455	11.56	.469	11.91	.375	9.53	.024	.61	4	28	.864	.392	0.750	19.05	1.457	0.026	0.157	4.00	P
LP 024H 02													1.000	25.40	1.065	0.019	0.189	4.79	P
LP 024H 03													1.250	31.75	0.839	0.015	0.220	5.59	P
LP 024H 04													1.500	38.10	0.692	0.012	0.252	6.39	P
LP 024H 05													1.750	44.45	0.589	0.011	0.283	7.19	P
LP 024H 06													2.000	50.80	0.513	0.009	0.315	7.99	P
LP 026H 01	.455	11.56	.469	11.91	.375	9.53	.026	.66	5	35	1.080	.490	0.750	19.05	1.887	0.034	0.178	4.51	P
LP 026H 02													1.000	25.40	1.375	0.025	0.215	5.46	P
LP 026H 03													1.250	31.75	1.082	0.019	0.252	6.40	P
LP 026H 04													1.500	38.10	0.892	0.016	0.289	7.34	P
LP 026H 05													1.750	44.45	0.758	0.014	0.326	8.28	P
LP 026H 06													2.000	50.80	0.660	0.012	0.363	9.22	P
LP 020J 01	.480	12.19	.500	12.70	.406	10.32	.020	.51	1	7	.245	.111	0.750	19.05	0.415	0.007	0.159	4.04	P
LP 020J 02													1.000	25.40	0.305	0.005	0.195	4.95	P
LP 020J 03													1.250	31.75	0.241	0.004	0.231	5.86	P
LP 020J 04													1.500	38.10	0.199	0.004	0.267	6.77	P
LP 020J 05													1.750	44.45	0.170	0.003	0.302	7.68	P
LP 020J 06													2.000	50.80	0.148	0.003	0.338	8.59	R
LP 022J 01	.480	12.19	.500	12.70	.406	10.32	.022	.56	2	14	.491	.223	0.750	19.05	0.816	0.015	0.148	3.76	P
LP 022J 02													1.000	25.40	0.597	0.011	0.178	4.53	P
LP 022J 03													1.250	31.75	0.471	0.008	0.208	5.29	P
LP 022J 04													1.500	38.10	0.389	0.007	0.238	6.05	P
LP 022J 05													1.750	44.45	0.331	0.006	0.268	6.82	P
LP 022J 06													2.000	50.80	0.288	0.005	0.298	7.58	R
LP 024J 01	.480	12.19	.500	12.70	.406	10.32	.024	.61	3	21	.736	.334	0.750	19.05	1.241	0.022	0.157	3.98	P
LP 024J 02													1.000	25.40	0.907	0.016	0.188	4.77	P
LP 024J 03													1.250	31.75	0.714	0.013	0.219	5.56	P
LP 024J 04													1.500	38.10	0.589	0.011	0.250	6.36	P
LP 024J 05													1.750	44.45	0.501	0.009	0.281	7.15	P
LP 024J 06													2.000	50.80	0.436	0.008	0.313	7.94	R

SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES


PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 026J 01	.480	12.19	.500	12.70	.406	10.32	.026	.66	4	28	.982	.445	0.750	19.05	1.697	0.030	0.172	4.36	P
LP 026J 02													1.000	25.40	1.237	0.022	0.206	5.24	P
LP 026J 03													1.250	31.75	0.973	0.017	0.241	6.12	P
LP 026J 04													1.500	38.10	0.802	0.014	0.276	7.01	P
LP 026J 05													1.750	44.45	0.682	0.012	0.311	7.89	R
LP 026J 06													2.000	50.80	0.593	0.011	0.345	8.78	R
LP 029J 01	.480	12.19	.500	12.70	.375	9.53	.029	.74	5	35	1.227	.557	0.750	19.05	2.273	0.041	0.210	5.33	P
LP 029J 02													1.000	25.40	1.650	0.029	0.256	6.51	P
LP 029J 03													1.250	31.75	1.296	0.023	0.303	7.69	P
LP 029J 04													1.500	38.10	1.066	0.019	0.349	8.87	P
LP 029J 05													1.750	44.45	0.906	0.016	0.395	10.05	R
LP 029J 06													2.000	50.80	0.788	0.014	0.442	11.22	R
LP 022JK 01	.510	12.95	.531	13.49	.438	11.11	.022	.56	1.5	10	.383	.174	0.750	19.05	0.641	0.011	0.152	3.87	P
LP 022JK 02													1.000	25.40	0.469	0.008	0.184	4.68	P
LP 022JK 03													1.250	31.75	0.370	0.007	0.216	5.48	R
LP 022JK 04													1.500	38.10	0.306	0.005	0.247	6.28	R
LP 022JK 05													1.750	44.45	0.260	0.005	0.279	7.08	R
LP 022JK 06													2.000	50.80	0.227	0.004	0.311	7.89	R
LP 024JK 01	.510	12.95	.531	13.49	.438	11.11	.024	.61	2.5	17	.638	.290	0.750	19.05	1.069	0.019	0.153	3.89	P
LP 024JK 02													1.000	25.40	0.781	0.014	0.183	4.65	P
LP 024JK 03													1.250	31.75	0.616	0.011	0.213	5.41	R
LP 024JK 04													1.500	38.10	0.508	0.009	0.243	6.17	R
LP 024JK 05													1.750	44.45	0.432	0.008	0.273	6.93	R
LP 024JK 06													2.000	50.80	0.376	0.007	0.303	7.68	R
LP 026JK 01	.510	12.95	.531	13.49	.406	10.32	.026	.66	3.5	24	.894	.405	0.750	19.05	1.525	0.027	0.164	4.16	P
LP 026JK 02													1.000	25.40	1.111	0.020	0.196	4.97	P
LP 026JK 03													1.250	31.75	0.874	0.016	0.228	5.79	R
LP 026JK 04													1.500	38.10	0.721	0.013	0.260	6.60	R
LP 026JK 05													1.750	44.45	0.613	0.011	0.292	7.41	R
LP 026JK 06													2.000	50.80	0.533	0.010	0.324	8.22	R
LP 029JK 01	.510	12.95	.531	13.49	.406	10.32	.029	.74	4.5	31	1.149	.521	0.750	19.05	2.081	0.037	0.198	5.02	P
LP 029JK 02													1.000	25.40	1.511	0.027	0.239	6.08	P
LP 029JK 03													1.250	31.75	1.186	0.021	0.281	7.14	R
LP 029JK 04													1.500	38.10	0.976	0.017	0.323	8.20	R
LP 029JK 05													1.750	44.45	0.830	0.015	0.365	9.26	R
LP 029JK 06													2.000	50.80	0.721	0.013	0.406	10.32	R
LP 032JK 01	.510	12.95	.531	13.49	.406	10.32	.032	.81	5.5	38	1.404	.637	0.750	19.05	2.735	0.049	0.236	6.01	P
LP 032JK 02													1.000	25.40	1.978	0.035	0.290	7.37	P
LP 032JK 03													1.250	31.75	1.550	0.028	0.344	8.73	R
LP 032JK 04													1.500	38.10	1.274	0.023	0.397	10.10	R
LP 032JK 05													1.750	44.45	1.081	0.019	0.451	11.46	R
LP 032JK 06													2.000	50.80	0.939	0.017	0.505	12.82	R

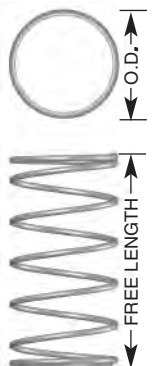

SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES

PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 022K 01	.540	13.72	.562	14.27	.469	11.91	.022	.56	1	7	.310	.141	0.750	19.05	0.521	0.009	0.155	3.94	P
LP 022K 02													1.000	25.40	0.382	0.007	0.187	4.76	P
LP 022K 03													1.250	31.75	0.301	0.005	0.220	5.59	R
LP 022K 04													1.500	38.10	0.249	0.004	0.252	6.41	R
LP 022K 05													1.750	44.45	0.212	0.004	0.285	7.24	R
LP 022K 06													2.000	50.80	0.184	0.003	0.317	8.06	R
LP 024K 01	.540	13.72	.562	14.27	.469	11.91	.024	.61	2	14	.620	.281	0.750	19.05	1.022	0.018	0.143	3.63	P
LP 024K 02													1.000	25.40	0.746	0.013	0.169	4.29	P
LP 024K 03													1.250	31.75	0.588	0.010	0.195	4.96	R
LP 024K 04													1.500	38.10	0.485	0.009	0.221	5.62	R
LP 024K 05													1.750	44.45	0.413	0.007	0.248	6.29	R
LP 024K 06													2.000	50.80	0.359	0.006	0.274	6.95	R
LP 026K 01	.540	13.72	.562	14.27	.438	11.11	.026	.66	3	21	.930	.422	0.750	19.05	1.547	0.028	0.149	3.78	P
LP 026K 02													1.000	25.40	1.128	0.020	0.175	4.45	P
LP 026K 03													1.250	31.75	0.887	0.016	0.201	5.11	R
LP 026K 04													1.500	38.10	0.731	0.013	0.228	5.78	R
LP 026K 05													1.750	44.45	0.622	0.011	0.254	6.45	R
LP 026K 06													2.000	50.80	0.541	0.010	0.280	7.12	R
LP 029K 01	.540	13.72	.562	14.27	.438	11.11	.029	.74	4	28	1.240	.563	0.750	19.05	2.161	0.039	0.176	4.47	P
LP 029K 02													1.000	25.40	1.569	0.028	0.209	5.32	P
LP 029K 03													1.250	31.75	1.232	0.022	0.243	6.17	R
LP 029K 04													1.500	38.10	1.014	0.018	0.277	7.02	R
LP 029K 05													1.750	44.45	0.861	0.015	0.310	7.88	R
LP 029K 06													2.000	50.80	0.749	0.013	0.344	8.73	R
LP 032K 01	.540	13.72	.562	14.27	.438	11.11	.032	.81	5	35	1.550	.703	0.750	19.05	2.860	0.051	0.208	5.28	P
LP 032K 02													1.000	25.40	2.069	0.037	0.251	6.37	P
LP 032K 03													1.250	31.75	1.621	0.029	0.293	7.45	R
LP 032K 04													1.500	38.10	1.332	0.024	0.336	8.54	R
LP 032K 05													1.750	44.45	1.131	0.020	0.379	9.63	R
LP 032K 06													2.000	50.80	0.982	0.018	0.422	10.71	R
LP 024KL 01	.570	14.48	.594	15.09	.469	11.91	.024	.61	1.5	10	.478	.217	0.750	19.05	0.796	0.014	0.149	3.78	P
LP 024KL 02													1.000	25.40	0.581	0.010	0.177	4.50	P
LP 024KL 03													1.250	31.75	0.458	0.008	0.205	5.22	R
LP 024KL 04													1.500	38.10	0.378	0.007	0.234	5.94	R
LP 024KL 05													1.750	44.45	0.322	0.006	0.262	6.66	R
LP 024KL 06													2.000	50.80	0.280	0.005	0.290	7.38	R
LP 026KL 01	.570	14.48	.594	15.09	.469	11.91	.026	.66	2.5	17	.797	.362	0.750	19.05	1.324	0.024	0.148	3.75	P
LP 026KL 02													1.000	25.40	0.965	0.017	0.174	4.41	P
LP 026KL 03													1.250	31.75	0.759	0.014	0.200	5.07	R
LP 026KL 04													1.500	38.10	0.626	0.011	0.225	5.73	R
LP 026KL 05													1.750	44.45	0.532	0.010	0.251	6.38	R
LP 026KL 06													2.000	50.80	0.463	0.008	0.277	7.04	R

SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES


PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 029KL 01													0.750	19.05	1.928	0.034	0.171	4.34	P
LP 029KL 02													1.000	25.40	1.400	0.025	0.203	5.15	P
LP 029KL 03	.570	14.48	.594	15.09	.469	11.91	.029	.74	3.5	24	1.116	.506	1.250	31.75	1.099	0.020	0.234	5.95	R
LP 029KL 04													1.500	38.10	0.905	0.016	0.266	6.76	R
LP 029KL 05													1.750	44.45	0.769	0.014	0.298	7.56	R
LP 029KL 06													2.000	50.80	0.668	0.012	0.329	8.36	R
LP 032KL 01													0.750	19.05	2.607	0.047	0.199	5.06	P
LP 032KL 02													1.000	25.40	1.886	0.034	0.239	6.07	P
LP 032KL 03	.570	14.48	.594	15.09	.469	11.91	.032	.81	4.5	31	1.435	.651	1.250	31.75	1.477	0.026	0.278	7.07	R
LP 032KL 04													1.500	38.10	1.214	0.022	0.318	8.07	R
LP 032KL 05													1.750	44.45	1.031	0.018	0.357	9.08	R
LP 032KL 06													2.000	50.80	0.895	0.016	0.397	10.08	R
LP 035KL 01													0.750	19.05	3.385	0.060	0.232	5.88	P
LP 035KL 02													1.000	25.40	2.439	0.044	0.281	7.13	P
LP 035KL 03	.570	14.48	.594	15.09	.469	11.91	.035	.89	5.5	38	1.754	.796	1.250	31.75	1.907	0.034	0.330	8.38	R
LP 035KL 04													1.500	38.10	1.565	0.028	0.379	9.63	R
LP 035KL 05													1.750	44.45	1.327	0.024	0.428	10.87	R
LP 035KL 06													2.000	50.80	1.152	0.021	0.477	12.12	R
LP 024L 01													0.750	19.05	0.642	0.011	0.153	3.89	P
LP 024L 02													1.000	25.40	0.469	0.008	0.183	4.65	P
LP 024L 03	.600	15.24	.625	15.88	.500	12.70	.024	.61	1	7	.383	.174	1.250	31.75	0.370	0.007	0.213	5.41	R
LP 024L 04													1.500	38.10	0.305	0.005	0.243	6.17	R
LP 024L 05													1.750	44.45	0.260	0.005	0.273	6.93	R
LP 024L 06													2.000	50.80	0.226	0.004	0.303	7.68	R
LP 026L 01													0.750	19.05	1.258	0.022	0.140	3.57	P
LP 026L 02													1.000	25.40	0.917	0.016	0.164	4.16	P
LP 026L 03	.600	15.24	.625	15.88	.500	12.70	.026	.66	2	14	.767	.348	1.250	31.75	0.721	0.013	0.187	4.75	R
LP 026L 04													1.500	38.10	0.595	0.011	0.210	5.34	R
LP 026L 05													1.750	44.45	0.506	0.009	0.233	5.93	R
LP 026L 06													2.000	50.80	0.440	0.008	0.257	6.52	R
LP 029L 01													0.750	19.05	1.943	0.035	0.158	4.01	P
LP 029L 02													1.000	25.40	1.411	0.025	0.185	4.69	P
LP 029L 03	.600	15.24	.625	15.88	.500	12.70	.029	.74	3	21	1.150	.522	1.250	31.75	1.108	0.020	0.211	5.37	R
LP 029L 04													1.500	38.10	0.912	0.016	0.238	6.05	R
LP 029L 05													1.750	44.45	0.775	0.014	0.265	6.73	R
LP 029L 06													2.000	50.80	0.673	0.012	0.292	7.40	R
LP 032L 01													0.750	19.05	2.696	0.048	0.181	4.60	P
LP 032L 02													1.000	25.40	1.950	0.035	0.213	5.42	P
LP 032L 03	.600	15.24	.625	15.88	.500	12.70	.032	.81	4	28	1.534	.696	1.250	31.75	1.528	0.027	0.246	6.24	R
LP 032L 04													1.500	38.10	1.256	0.022	0.278	7.07	R
LP 032L 05													1.750	44.45	1.066	0.019	0.311	7.89	R
LP 032L 06													2.000	50.80	0.926	0.017	0.343	8.72	R

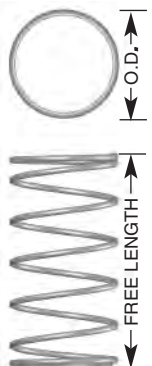

SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES

PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 035L 01													0.750	19.05	3.537	0.063	0.208	5.28	P
LP 035L 02													1.000	25.40	2.549	0.046	0.248	6.29	P
LP 035L 03	.600	15.24	.625	15.88	.500	12.70	.035	.89	5	35	1.917	.870	1.250	31.75	1.993	0.036	0.288	7.31	R
LP 035L 04													1.500	38.10	1.635	0.029	0.328	8.32	R
LP 035L 05													1.750	44.45	1.387	0.025	0.367	9.33	R
LP 035L 06													2.000	50.80	1.204	0.021	0.407	10.35	R
LP 026LM 01													0.750	19.05	0.970	0.017	0.147	3.75	S
LP 026LM 02													1.000	25.40	0.707	0.013	0.173	4.40	S
LP 026LM 03	.630	16.00	.656	16.66	.531	13.49	.026	.66	1.5	10	.584	.265	1.250	31.75	0.556	0.010	0.199	5.06	S
LP 026LM 04													1.500	38.10	0.458	0.008	0.225	5.72	S
LP 026LM 05													1.750	44.45	0.390	0.007	0.251	6.37	S
LP 026LM 06													2.000	50.80	0.339	0.006	0.277	7.03	U
LP 029LM 01													0.750	19.05	1.647	0.029	0.159	4.03	S
LP 029LM 02													1.000	25.40	1.196	0.021	0.186	4.72	S
LP 029LM 03	.630	16.00	.656	16.66	.531	13.49	.029	.74	2.5	17	.974	.442	1.250	31.75	0.939	0.017	0.213	5.40	S
LP 029LM 04													1.500	38.10	0.773	0.014	0.240	6.09	S
LP 029LM 05													1.750	44.45	0.657	0.012	0.267	6.78	S
LP 029LM 06													2.000	50.80	0.571	0.010	0.294	7.46	U
LP 032LM 01													0.750	19.05	2.385	0.043	0.178	4.53	S
LP 032LM 02													1.000	25.40	1.726	0.031	0.210	5.33	S
LP 032LM 03	.630	16.00	.656	16.66	.531	13.49	.032	.81	3.5	24	1.364	.619	1.250	31.75	1.352	0.024	0.241	6.12	S
LP 032LM 04													1.500	38.10	1.111	0.020	0.273	6.92	S
LP 032LM 05													1.750	44.45	0.943	0.017	0.304	7.72	S
LP 032LM 06													2.000	50.80	0.819	0.015	0.335	8.52	U
LP 035LM 01													0.750	19.05	3.202	0.057	0.202	5.14	S
LP 035LM 02													1.000	25.40	2.307	0.041	0.240	6.10	S
LP 035LM 03	.630	16.00	.656	16.66	.531	13.49	.035	.89	4.5	31	1.753	.795	1.250	31.75	1.804	0.032	0.278	7.06	S
LP 035LM 04													1.500	38.10	1.480	0.026	0.316	8.01	S
LP 035LM 05													1.750	44.45	1.255	0.022	0.353	8.97	S
LP 035LM 06													2.000	50.80	1.090	0.019	0.391	9.93	U
LP 038LM 01													0.750	19.05	4.120	0.074	0.230	5.84	S
LP 038LM 02													1.000	25.40	2.958	0.053	0.275	7.00	S
LP 038LM 03	.630	16.00	.656	16.66	.500	12.70	.038	.97	5.5	38	2.143	.972	1.250	31.75	2.307	0.041	0.321	8.15	S
LP 038LM 04													1.500	38.10	1.891	0.034	0.366	9.31	S
LP 038LM 05													1.750	44.45	1.602	0.029	0.412	10.47	S
LP 038LM 06													2.000	50.80	1.389	0.025	0.458	11.62	U
LP 026M 01													0.750	19.05	0.776	0.014	0.153	3.89	S
LP 026M 02													1.000	25.40	0.566	0.010	0.181	4.60	S
LP 026M 03	.660	16.76	.687	17.45	.563	14.29	.026	.66	1	7	.463	.210	1.250	31.75	0.445	0.008	0.209	5.31	S
LP 026M 04													1.500	38.10	0.367	0.007	0.237	6.02	S
LP 026M 05													1.750	44.45	0.312	0.006	0.265	6.73	S
LP 026M 06													2.000	50.80	0.271	0.005	0.293	7.44	U

SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES


PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 029M 01													0.750	19.05	1.552	0.028	0.153	3.88	S
LP 029M 02													1.000	25.40	1.127	0.020	0.178	4.51	S
LP 029M 03	.660	16.76	.687	17.45	.563	14.29	.029	.74	2	14	.927	.420	1.250	31.75	0.885	0.016	0.202	5.14	S
LP 029M 04													1.500	38.10	0.728	0.013	0.227	5.77	S
LP 029M 05													1.750	44.45	0.619	0.011	0.252	6.40	S
LP 029M 06													2.000	50.80	0.538	0.010	0.277	7.03	U
LP 032M 01													0.750	19.05	2.384	0.043	0.167	4.24	S
LP 032M 02													1.000	25.40	1.725	0.031	0.194	4.93	S
LP 032M 03	.660	16.76	.687	17.45	.563	14.29	.032	.81	3	21	1.390	.630	1.250	31.75	1.351	0.024	0.221	5.62	S
LP 032M 04													1.500	38.10	1.111	0.020	0.248	6.31	S
LP 032M 05													1.750	44.45	0.943	0.017	0.276	7.00	S
LP 032M 06													2.000	50.80	0.819	0.015	0.303	7.69	U
LP 035M 01													0.750	19.05	3.290	0.059	0.187	4.74	S
LP 035M 02													1.000	25.40	2.371	0.042	0.218	5.55	S
LP 035M 03	.660	16.76	.687	17.45	.563	14.29	.035	.89	4	28	1.853	.841	1.250	31.75	1.854	0.033	0.250	6.35	S
LP 035M 04													1.500	38.10	1.521	0.027	0.282	7.16	S
LP 035M 05													1.750	44.45	1.290	0.023	0.313	7.96	S
LP 035M 06													2.000	50.80	1.120	0.020	0.345	8.77	U
LP 038M 01													0.750	19.05	4.290	0.077	0.210	5.33	S
LP 038M 02													1.000	25.40	3.079	0.055	0.248	6.29	S
LP 038M 03	.660	16.76	.687	17.45	.531	13.49	.038	.97	5	35	2.317	1.051	1.250	31.75	2.402	0.043	0.285	7.25	S
LP 038M 04													1.500	38.10	1.969	0.035	0.323	8.21	S
LP 038M 05													1.750	44.45	1.668	0.030	0.361	9.16	S
LP 038M 06													2.000	50.80	1.447	0.026	0.399	10.12	U
LP 029N 01													0.750	19.05	0.950	0.017	0.169	4.29	T
LP 029N 02													1.000	25.40	0.690	0.012	0.200	5.07	T
LP 029N 03	.720	18.29	.750	19.05	.625	15.88	.029	.74	1	7	.552	.250	1.250	31.75	0.542	0.010	0.230	5.85	T
LP 029N 04													1.500	38.10	0.446	0.008	0.261	6.64	T
LP 029N 05													1.750	44.45	0.379	0.007	0.292	7.42	U
LP 029N 06													2.000	50.80	0.329	0.006	0.323	8.20	U
LP 032N 01													0.750	19.05	1.886	0.034	0.164	4.17	T
LP 032N 02													1.000	25.40	1.364	0.024	0.190	4.84	T
LP 032N 03	.720	18.29	.750	19.05	.625	15.88	.032	.81	2	14	1.104	.501	1.250	31.75	1.069	0.019	0.217	5.50	T
LP 032N 04													1.500	38.10	0.878	0.016	0.243	6.16	T
LP 032N 05													1.750	44.45	0.746	0.013	0.269	6.83	U
LP 032N 06													2.000	50.80	0.648	0.012	0.295	7.49	U
LP 035N 01													0.750	19.05	2.885	0.052	0.176	4.47	T
LP 035N 02													1.000	25.40	2.079	0.037	0.203	5.16	T
LP 035N 03	.720	18.29	.750	19.05	.594	15.08	.035	.89	3	21	1.657	.751	1.250	31.75	1.625	0.029	0.231	5.86	T
LP 035N 04													1.500	38.10	1.334	0.024	0.258	6.56	T
LP 035N 05													1.750	44.45	1.131	0.020	0.286	7.25	U
LP 035N 06													2.000	50.80	0.982	0.018	0.313	7.95	U

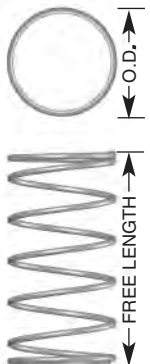

SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES

PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 038N 01	.720	18.29	.750	19.05	.594	15.08	.038	.97	4	28	2.209	1.002	0.750	19.05	3.964	0.071	0.193	4.90	T
LP 038N 02													1.000	25.40	2.846	0.051	0.224	5.68	T
LP 038N 03													1.250	31.75	2.219	0.040	0.255	6.47	T
LP 038N 04													1.500	38.10	1.819	0.032	0.286	7.26	T
LP 038N 05													1.750	44.45	1.541	0.028	0.317	8.04	U
LP 038N 06													2.000	50.80	1.337	0.024	0.348	8.83	U
LP 042N 01	.720	18.29	.750	19.05	.594	15.08	.042	1.07	5	35	2.761	1.252	0.750	19.05	5.265	0.094	0.226	5.73	T
LP 042N 02													1.000	25.40	3.759	0.067	0.265	6.74	T
LP 042N 03													1.250	31.75	2.923	0.052	0.305	7.76	T
LP 042N 04													1.500	38.10	2.391	0.043	0.345	8.77	T
LP 042N 05													1.750	44.45	2.023	0.036	0.385	9.78	U
LP 042N 06													2.000	50.80	1.753	0.031	0.425	10.80	U
LP 035P 01	.845	21.46	.875	22.23	.719	18.26	.035	.89	1	7	.752	.341	1.000	25.40	0.978	0.017	0.231	5.88	X
LP 035P 02													1.250	31.75	0.764	0.014	0.267	6.77	X
LP 035P 03													1.500	38.10	0.627	0.011	0.302	7.67	X
LP 035P 04													1.750	44.45	0.532	0.009	0.337	8.57	X
LP 035P 05													2.000	50.80	0.462	0.008	0.372	9.46	Z
LP 035P 06													2.250	57.15	0.408	0.007	0.408	10.36	Z
LP 038P 01	.845	21.46	.875	22.23	.719	18.26	.038	.97	2	14	1.503	.682	1.000	25.40	1.909	0.034	0.213	5.40	X
LP 038P 02													1.250	31.75	1.489	0.027	0.241	6.11	X
LP 038P 03													1.500	38.10	1.221	0.022	0.268	6.82	X
LP 038P 04													1.750	44.45	1.034	0.018	0.296	7.53	X
LP 038P 05													2.000	50.80	0.897	0.016	0.324	8.23	Z
LP 038P 06													2.250	57.15	0.792	0.014	0.352	8.94	Z
LP 042P 01	.845	21.46	.875	22.23	.719	18.26	.042	1.07	3	21	2.255	1.023	1.000	25.40	2.941	0.053	0.233	5.93	X
LP 042P 02													1.250	31.75	2.287	0.041	0.264	6.71	X
LP 042P 03													1.500	38.10	1.871	0.033	0.295	7.48	X
LP 042P 04													1.750	44.45	1.583	0.028	0.325	8.26	X
LP 042P 05													2.000	50.80	1.372	0.024	0.356	9.04	Z
LP 042P 06													2.250	57.15	1.210	0.022	0.387	9.82	Z
LP 045P 01	.845	21.46	.875	22.23	.719	18.26	.045	1.14	4	28	3.007	1.364	1.000	25.40	3.997	0.071	0.248	6.29	X
LP 045P 02													1.250	31.75	3.101	0.055	0.280	7.12	X
LP 045P 03													1.500	38.10	2.533	0.045	0.313	7.95	X
LP 045P 04													1.750	44.45	2.141	0.038	0.345	8.78	X
LP 045P 05													2.000	50.80	1.854	0.033	0.378	9.60	Z
LP 045P 06													2.250	57.15	1.635	0.029	0.411	10.43	Z
LP 049P 01	.845	21.46	.875	22.23	.688	17.46	.049	1.24	5	35	3.758	1.704	1.000	25.40	5.227	0.093	0.281	7.14	X
LP 049P 02													1.250	31.75	4.042	0.072	0.320	8.13	X
LP 049P 03													1.500	38.10	3.295	0.059	0.359	9.13	X
LP 049P 04													1.750	44.45	2.781	0.050	0.399	10.13	X
LP 049P 05													2.000	50.80	2.406	0.043	0.438	11.13	Z
LP 049P 06													2.250	57.15	2.120	0.038	0.477	12.12	Z

SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES


PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 042R 01													1.250	31.75	1.055	0.019	0.320	8.12	AE
LP 042R 02													1.500	38.10	0.863	0.015	0.363	9.22	AE
LP 042R 03	.970	24.64	1.000	25.40	.844	21.43	.042	1.07	1	7	.982	.445	1.750	44.45	0.730	0.013	0.406	10.31	AE
LP 042R 04													2.000	50.80	0.633	0.011	0.449	11.40	AE
LP 042R 05													2.250	57.15	0.558	0.010	0.492	12.50	AG
LP 042R 06													2.500	63.50	0.500	0.009	0.535	13.59	AJ
LP 045R 01													1.250	31.75	2.022	0.036	0.279	7.09	AE
LP 045R 02													1.500	38.10	1.652	0.029	0.311	7.91	AE
LP 045R 03	.970	24.64	1.000	25.40	.844	21.43	.045	1.14	2	14	1.963	.890	1.750	44.45	1.396	0.025	0.344	8.73	AE
LP 045R 04													2.000	50.80	1.209	0.022	0.376	9.55	AE
LP 045R 05													2.250	57.15	1.066	0.019	0.408	10.37	AG
LP 045R 06													2.500	63.50	0.953	0.017	0.441	11.19	AJ
LP 049R 01													1.250	31.75	3.080	0.055	0.294	7.46	AE
LP 049R 02													1.500	38.10	2.511	0.045	0.327	8.31	AE
LP 049R 03	.970	24.64	1.000	25.40	.813	20.64	.049	1.24	3	21	2.945	1.336	1.750	44.45	2.119	0.038	0.360	9.15	AE
LP 049R 04													2.000	50.80	1.833	0.033	0.394	10.00	AE
LP 049R 05													2.250	57.15	1.615	0.029	0.427	10.84	AG
LP 049R 06													2.500	63.50	1.444	0.026	0.460	11.69	AJ
LP 055R 01													1.250	31.75	4.376	0.078	0.353	8.96	AE
LP 055R 02													1.500	38.10	3.557	0.064	0.396	10.06	AE
LP 055R 03	.970	24.64	1.000	25.40	.813	20.64	.055	1.40	4	28	3.927	1.781	1.750	44.45	2.996	0.053	0.439	11.15	AE
LP 055R 04													2.000	50.80	2.588	0.046	0.482	12.25	AE
LP 055R 05													2.250	57.15	2.277	0.041	0.526	13.35	AG
LP 055R 06													2.500	63.50	2.033	0.036	0.569	14.45	AJ
LP 059R 01													1.250	31.75	5.676	0.101	0.385	9.79	AE
LP 059R 02													1.500	38.10	4.604	0.082	0.434	11.02	AE
LP 059R 03	.970	24.64	1.000	25.40	.813	20.64	.059	1.50	5	35	4.909	2.226	1.750	44.45	3.872	0.069	0.482	12.25	AE
LP 059R 04													2.000	50.80	3.341	0.060	0.531	13.48	AE
LP 059R 05													2.250	57.15	2.938	0.052	0.579	14.71	AG
LP 059R 06													2.500	63.50	2.622	0.047	0.628	15.95	AJ
LP 045S 01													1.500	38.10	1.056	0.019	0.324	8.22	AE
LP 045S 02													1.750	44.45	0.893	0.016	0.358	9.10	AE
LP 045S 03	1.095	27.81	1.125	28.58	.969	24.61	.045	1.14	1	7	1.243	.564	2.000	50.80	0.773	0.014	0.393	9.98	AE
LP 045S 04													2.250	57.15	0.682	0.012	0.427	10.85	AE
LP 045S 05													2.500	63.50	0.610	0.011	0.462	11.73	AJ
LP 045S 06													2.750	69.85	0.551	0.010	0.496	12.61	AJ
LP 049S 01													1.500	38.10	2.065	0.037	0.296	7.53	AE
LP 049S 02													1.750	44.45	1.743	0.031	0.324	8.23	AE
LP 049S 03	1.095	27.81	1.125	28.58	.938	23.81	.049	1.24	2	14	2.485	1.127	2.000	50.80	1.508	0.027	0.352	8.93	AE
LP 049S 04													2.250	57.15	1.328	0.024	0.379	9.63	AE
LP 049S 05													2.500	63.50	1.187	0.021	0.407	10.34	AJ
LP 049S 06													2.750	69.85	1.073	0.019	0.434	11.04	AJ



SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES

PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 055S 01	1.095	27.81	1.125	28.58	.938	23.81	.055	1.40	3	21	3.728	1.691	1.500	38.10	3.211	0.057	0.339	8.62	AE
LP 055S 02													1.750	44.45	2.705	0.048	0.372	9.44	AE
LP 055S 03													2.000	50.80	2.336	0.042	0.404	10.27	AE
LP 055S 04													2.250	57.15	2.056	0.037	0.437	11.10	AE
LP 055S 05													2.500	63.50	1.836	0.033	0.470	11.93	AJ
LP 055S 06													2.750	69.85	1.658	0.030	0.502	12.76	AJ
LP 059S 01	1.095	27.81	1.125	28.58	.938	23.81	.059	1.50	4	28	4.970	2.254	1.500	38.10	4.364	0.078	0.361	9.17	AE
LP 059S 02													1.750	44.45	3.671	0.066	0.396	10.06	AE
LP 059S 03													2.000	50.80	3.167	0.057	0.431	10.94	AE
LP 059S 04													2.250	57.15	2.785	0.050	0.466	11.83	AE
LP 059S 05													2.500	63.50	2.485	0.044	0.500	12.71	AJ
LP 059S 06													2.750	69.85	2.244	0.040	0.535	13.59	AJ
LP 063S 01	1.095	27.81	1.125	28.58	.938	23.81	.063	1.60	5	35	6.213	2.818	1.500	38.10	5.600	0.100	0.391	9.92	AE
LP 063S 02													1.750	44.45	4.703	0.084	0.429	10.90	AE
LP 063S 03													2.000	50.80	4.054	0.072	0.467	11.87	AE
LP 063S 04													2.250	57.15	3.562	0.064	0.506	12.85	AE
LP 063S 05													2.500	63.50	3.177	0.057	0.544	13.83	AJ
LP 063S 06													2.750	69.85	2.867	0.051	0.583	14.80	AJ
LP 055T 01	1.218	30.94	1.250	31.75	1.063	26.99	.055	1.40	1	7	1.534	.696	1.500	38.10	1.449	0.026	0.441	11.20	AE
LP 055T 02													1.750	44.45	1.220	0.022	0.493	12.52	AE
LP 055T 03													2.000	50.80	1.054	0.019	0.544	13.83	AE
LP 055T 04													2.250	57.15	0.928	0.017	0.596	15.14	AE
LP 055T 05													2.500	63.50	0.828	0.015	0.648	16.46	AJ
LP 055T 06													2.750	69.85	0.748	0.013	0.700	17.77	AJ
LP 059T 01	1.218	30.94	1.250	31.75	1.063	26.99	.059	1.50	2	14	3.068	1.391	1.500	38.10	2.753	0.049	0.386	9.79	AE
LP 059T 02													1.750	44.45	2.315	0.041	0.425	10.79	AE
LP 059T 03													2.000	50.80	1.998	0.036	0.464	11.79	AE
LP 059T 04													2.250	57.15	1.757	0.031	0.504	12.80	AE
LP 059T 05													2.500	63.50	1.568	0.028	0.543	13.80	AJ
LP 059T 06													2.750	69.85	1.415	0.025	0.583	14.80	AJ
LP 063T 01	1.218	30.94	1.250	31.75	1.031	26.19	.063	1.60	3	21	4.602	2.087	1.500	38.10	4.124	0.074	0.384	9.76	AE
LP 063T 02													1.750	44.45	3.464	0.062	0.421	10.71	AE
LP 063T 03													2.000	50.80	2.986	0.053	0.459	11.65	AE
LP 063T 04													2.250	57.15	2.624	0.047	0.496	12.60	AE
LP 063T 05													2.500	63.50	2.340	0.042	0.533	13.54	AJ
LP 063T 06													2.750	69.85	2.111	0.038	0.570	14.49	AJ
LP 067T 01	1.218	30.94	1.250	31.75	1.031	26.19	.067	1.70	4	28	6.136	2.783	1.500	38.10	5.576	0.100	0.400	10.15	AE
LP 067T 02													1.750	44.45	4.676	0.083	0.438	11.12	AE
LP 067T 03													2.000	50.80	4.026	0.072	0.476	12.09	AE
LP 067T 04													2.250	57.15	3.535	0.063	0.514	13.06	AE
LP 067T 05													2.500	63.50	3.150	0.056	0.552	14.03	AJ
LP 067T 06													2.750	69.85	2.841	0.051	0.591	15.00	AJ

SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES


PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 072T 01													1.500	38.10	7.225	0.129	0.438	11.14	AE
LP 072T 02													1.750	44.45	6.048	0.108	0.482	12.24	AE
LP 072T 03	1.218	30.94	1.250	31.75	1.031	26.19	.072	1.83	5	35	7.670	3.478	2.000	50.80	5.200	0.093	0.525	13.34	AE
LP 072T 04													2.250	57.15	4.561	0.081	0.568	14.44	AE
LP 072T 05													2.500	63.50	4.062	0.073	0.612	15.54	AJ
LP 072T 06													2.750	69.85	3.661	0.065	0.655	16.64	AJ
LP 063V 01													1.500	38.10	1.942	0.035	0.456	11.59	AK
LP 063V 02													1.750	44.45	1.631	0.029	0.507	12.88	AK
LP 063V 03	1.400	35.56	1.437	36.50	1.219	30.96	.063	1.60	1	7	2.027	.919	2.000	50.80	1.406	0.025	0.558	14.18	AL
LP 063V 04													2.250	57.15	1.235	0.022	0.609	15.47	AL
LP 063V 05													2.500	63.50	1.102	0.020	0.660	16.77	AM
LP 063V 06													2.750	69.85	0.994	0.018	0.711	18.06	AM
LP 067V 01													1.500	38.10	3.670	0.066	0.395	10.04	AK
LP 067V 02													1.750	44.45	3.078	0.055	0.433	10.99	AK
LP 067V 03	1.400	35.56	1.437	36.50	1.219	30.96	.067	1.70	2	14	4.055	1.839	2.000	50.80	2.650	0.047	0.470	11.94	AL
LP 067V 04													2.250	57.15	2.327	0.042	0.507	12.88	AL
LP 067V 05													2.500	63.50	2.074	0.037	0.545	13.83	AM
LP 067V 06													2.750	69.85	1.870	0.033	0.582	14.78	AM
LP 072V 01													1.500	38.10	5.541	0.099	0.402	10.22	AK
LP 072V 02													1.750	44.45	4.638	0.083	0.439	11.14	AK
LP 072V 03	1.400	35.56	1.437	36.50	1.219	30.96	.072	1.83	3	21	6.082	2.758	2.000	50.80	3.988	0.071	0.475	12.06	AL
LP 072V 04													2.250	57.15	3.498	0.062	0.511	12.99	AL
LP 072V 05													2.500	63.50	3.115	0.056	0.548	13.91	AM
LP 072V 06													2.750	69.85	2.808	0.050	0.584	14.83	AM
LP 080V 01													1.500	38.10	7.849	0.140	0.467	11.86	AK
LP 080V 02													1.750	44.45	6.550	0.117	0.512	13.00	AK
LP 080V 03	1.400	35.56	1.437	36.50	1.188	30.16	.080	2.03	4	28	8.109	3.678	2.000	50.80	5.619	0.100	0.557	14.15	AL
LP 080V 04													2.250	57.15	4.920	0.088	0.602	15.29	AL
LP 080V 05													2.500	63.50	4.376	0.078	0.647	16.43	AM
LP 080V 06													2.750	69.85	3.940	0.070	0.692	17.58	AM
LP 085V 01													1.500	38.10	10.101	0.180	0.496	12.61	AK
LP 085V 02													1.750	44.45	8.412	0.150	0.545	13.84	AK
LP 085V 03	1.400	35.56	1.437	36.50	1.188	30.16	.085	2.16	5	35	1.136	4.597	2.000	50.80	7.207	0.129	0.593	15.07	AL
LP 085V 04													2.250	57.15	6.303	0.113	0.642	16.31	AL
LP 085V 05													2.500	63.50	5.602	0.100	0.690	17.54	AM
LP 085V 06													2.750	69.85	5.040	0.090	0.739	18.77	AM
LP 067W 01													1.625	41.28	1.990	0.036	0.515	13.08	AK
LP 067W 02													1.750	44.45	1.829	0.033	0.542	13.78	AK
LP 067W 03	1.460	37.08	1.500	38.10	1.281	32.54	.067	1.70	1	7	2.209	1.002	2.000	50.80	1.575	0.028	0.597	15.18	AL
LP 067W 04													2.250	57.15	1.383	0.025	0.653	16.57	AL
LP 067W 05													2.500	63.50	1.232	0.022	0.708	17.97	AM
LP 067W 06													2.750	69.85	1.112	0.020	0.763	19.37	AM



SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES

PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 072W 01	1.460	37.08	1.500	38.10	1.250	31.75	.072	1.83	2	14	4.418	2.004	1.625	41.28	3.777	0.067	0.455	11.57	AK
LP 072W 02													1.750	44.45	3.470	0.062	0.477	12.11	AK
LP 072W 03													2.000	50.80	2.983	0.053	0.519	13.19	AL
LP 072W 04													2.250	57.15	2.617	0.047	0.562	14.27	AL
LP 072W 05													2.500	63.50	2.330	0.042	0.604	15.35	AM
LP 072W 06													2.750	69.85	2.100	0.038	0.647	16.42	AM
LP 080W 01	1.460	37.08	1.500	38.10	1.250	31.75	.080	2.03	3	21	6.627	3.005	1.625	41.28	5.910	0.106	0.504	12.79	AK
LP 080W 02													1.750	44.45	5.421	0.097	0.528	13.40	AK
LP 080W 03													2.000	50.80	4.651	0.083	0.575	14.61	AL
LP 080W 04													2.250	57.15	4.072	0.073	0.623	15.82	AL
LP 080W 05													2.500	63.50	3.622	0.065	0.670	17.03	AM
LP 080W 06													2.750	69.85	3.261	0.058	0.718	18.24	AM
LP 085W 01	1.460	37.08	1.500	38.10	1.250	31.75	.085	2.16	4	28	8.836	4.007	1.625	41.28	8.007	0.143	0.521	13.25	AK
LP 085W 02													1.750	44.45	7.337	0.131	0.546	13.86	AK
LP 085W 03													2.000	50.80	6.286	0.112	0.594	15.10	AL
LP 085W 04													2.250	57.15	5.498	0.098	0.643	16.33	AL
LP 085W 05													2.500	63.50	4.886	0.087	0.692	17.57	AM
LP 085W 06													2.750	69.85	4.396	0.078	0.740	18.80	AM
LP 092W 01	1.460	37.08	1.500	38.10	1.219	30.96	.092	2.34	5	35	11.045	5.009	1.625	41.28	10.573	0.189	0.580	14.74	AK
LP 092W 02													1.750	44.45	9.676	0.173	0.609	15.46	AK
LP 092W 03													2.000	50.80	8.273	0.148	0.665	16.89	AL
LP 092W 04													2.250	57.15	7.225	0.129	0.721	18.32	AL
LP 092W 05													2.500	63.50	6.413	0.115	0.778	19.76	AM
LP 092W 06													2.750	69.85	5.765	0.103	0.834	21.19	AM
LP 067X 01	1.580	40.13	1.625	41.28	1.375	34.93	.067	1.70	1	7	2.592	1.176	1.750	44.45	1.988	0.035	0.446	11.33	AP
LP 067X 02													2.000	50.80	1.712	0.031	0.486	12.34	AR
LP 067X 03													2.250	57.15	1.503	0.027	0.525	13.34	AR
LP 067X 04													2.500	63.50	1.340	0.024	0.565	14.35	AZ
LP 067X 05													2.750	69.85	1.208	0.022	0.604	15.35	AZ
LP 067X 06													3.000	76.20	1.100	0.020	0.644	16.35	AZ
LP 072X 01	1.580	40.13	1.625	41.28	1.375	34.93	.072	1.83	2	14	5.185	2.351	1.750	44.45	3.840	0.069	0.400	10.15	AP
LP 072X 02													2.000	50.80	3.302	0.059	0.430	10.91	AR
LP 072X 03													2.250	57.15	2.896	0.052	0.460	11.67	AR
LP 072X 04													2.500	63.50	2.579	0.046	0.489	12.43	AZ
LP 072X 05													2.750	69.85	2.324	0.042	0.519	13.19	AZ
LP 072X 06													3.000	76.20	2.116	0.038	0.549	13.95	AZ
LP 080X 01	1.580	40.13	1.625	41.28	1.375	34.93	.080	2.03	3	21	7.777	3.527	1.750	44.45	5.954	0.106	0.444	11.27	AP
LP 080X 02													2.000	50.80	5.108	0.091	0.478	12.13	AR
LP 080X 03													2.250	57.15	4.473	0.080	0.511	12.99	AR
LP 080X 04													2.500	63.50	3.978	0.071	0.545	13.85	AZ
LP 080X 05													2.750	69.85	3.582	0.064	0.579	14.70	AZ
LP 080X 06													3.000	76.20	3.258	0.058	0.613	15.56	AZ

SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES


PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

COMPRESSION SPRINGS: LITE PRESSURE™ SERIES

ENDS NOT GROUND • Type 316 Stainless Steel (Passivated Ultrasonically Cleaned)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WORK IN HOLE		WORK OVER ROD		WIRE DIAMETER		PRESSURE @ 80% DEFLECTION		LOAD AT SOLID HEIGHT		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	PSI	kPa	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	
LP 085X 01	1.580	40.13	1.625	41.28	1.344	34.13	.085	2.16	4	28	10.370	4.703	1.750	44.45	8.047	0.144	0.461	11.72	AP
LP 085X 02													2.000	50.80	6.894	0.123	0.496	12.59	AR
LP 085X 03													2.250	57.15	6.030	0.108	0.530	13.47	AR
LP 085X 04													2.500	63.50	5.358	0.096	0.565	14.35	AZ
LP 085X 05													2.750	69.85	4.821	0.086	0.599	15.22	AZ
LP 085X 06													3.000	76.20	4.382	0.078	0.634	16.10	AZ
LP 092X 01	1.580	40.13	1.625	41.28	1.344	34.13	.092	2.34	5	35	12.962	5.879	1.750	44.45	10.490	0.187	0.514	13.07	AP
LP 092X 02													2.000	50.80	8.969	0.160	0.555	14.09	AR
LP 092X 03													2.250	57.15	7.833	0.140	0.595	15.12	AR
LP 092X 04													2.500	63.50	6.953	0.124	0.636	16.15	AZ
LP 092X 05													2.750	69.85	6.250	0.112	0.676	17.17	AZ
LP 092X 06													3.000	76.20	5.676	0.101	0.717	18.20	AZ


COMPRESSION SPRINGS



SPECIAL INSTRUCTIONS FOR LITE PRESSURE™ COMPRESSION SERIES

PRICING: See Inside Front Cover for pricing for up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Height are pre-calculated for Type 316 Stainless.

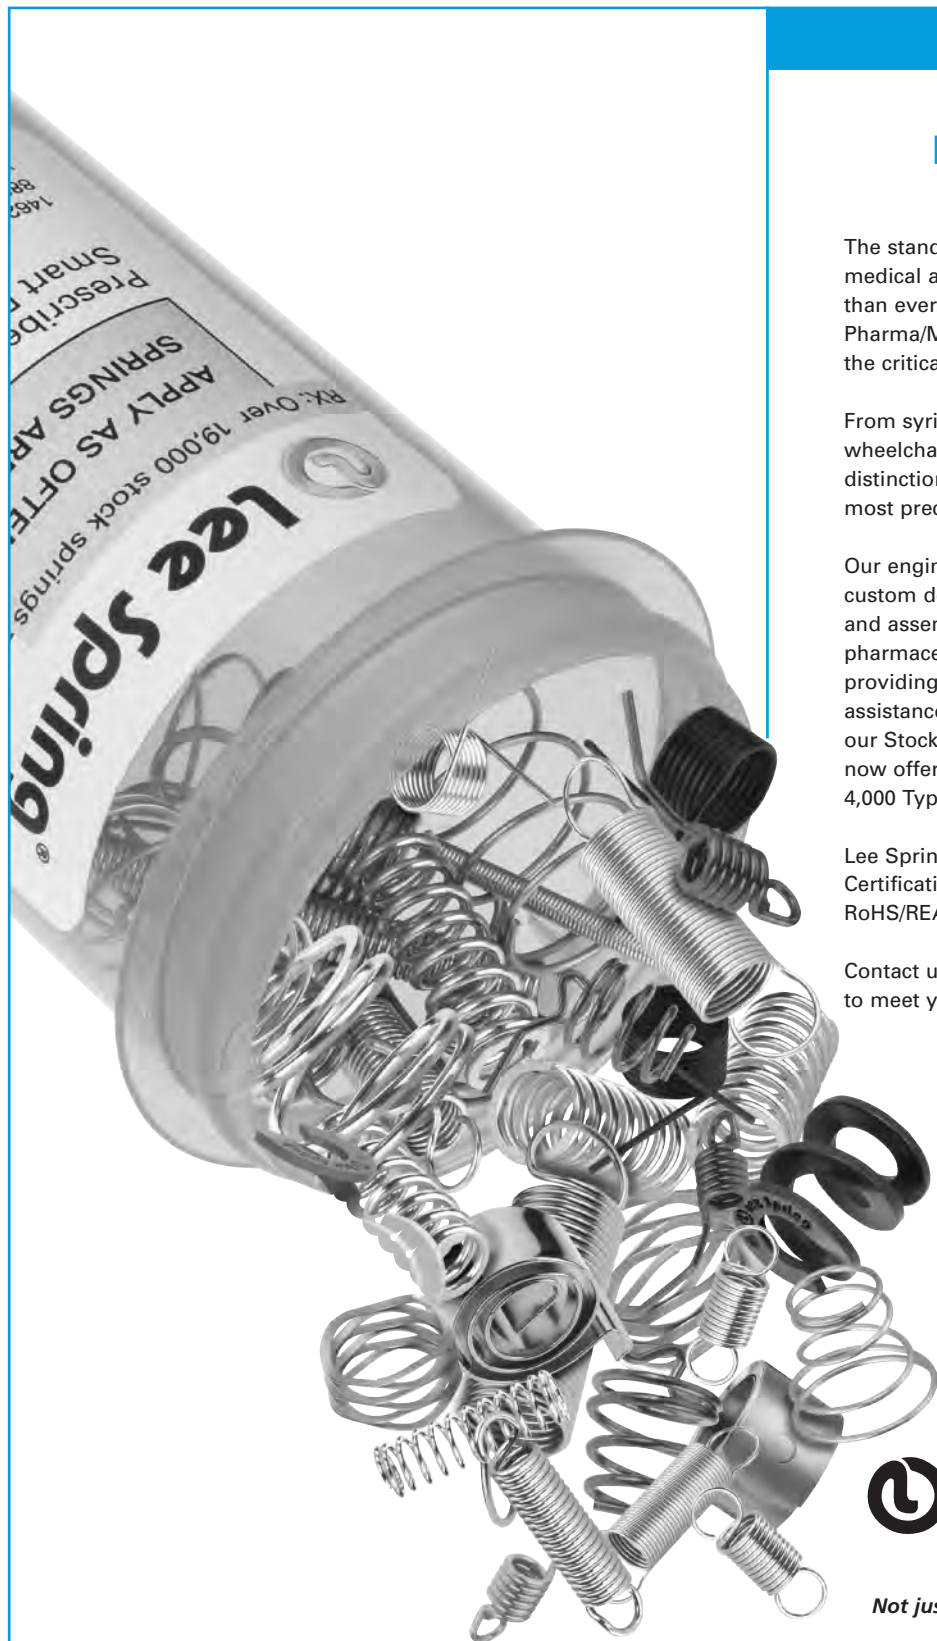

DOCTORS' ORDERS.

The standards of excellence demanded by today's medical and pharmaceutical applications are higher than ever. That's why leading manufacturers of Pharma/Med equipment choose Lee Spring to meet the critical needs of their products.

From syringes to IV delivery, from surgical tools to wheelchairs, Lee Spring offers the engineering distinction and product dependability to meet the most precise specifications.

Our engineering staff has the expertise to develop custom designed springs, wire forms, stampings, and assemblies for the most complex medical and pharmaceutical applications. We are experienced in providing prototype and concurrent engineering assistance, together with FDA trial support. And our Stock Spring Catalog continues to expand, now offering over 19,000 distinct designs including 4,000 Type 316 Stainless Steel Compression Springs.

Lee Spring's quality is underscored by our ISO Certification and a steadfast commitment to RoHS/REACH and other regulatory standards

Contact us today. We've got the right prescription to meet your needs.

 **Lee Spring®**
leespring.com


*Not just a better spring,
a better "PharmaMed" spring company.*

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 014A 01	.120	3.05	.125	3.18	.014	.36	2.000	.906	0.250	6.35	11.25	0.200	0.088	2.24	F	F	M
LC 014A 02									0.313	7.94	8.90	0.159	0.105	2.67	F	F	M
LC 014A 03									0.375	9.52	7.10	0.126	0.122	3.10	F	F	M
LC 014A 04									0.438	11.11	6.00	0.107	0.139	3.53	F	F	M
LC 014A 05									0.500	12.70	5.20	0.093	0.156	3.96	F	F	M
LC 014A 06									0.563	14.29	4.60	0.082	0.172	4.37	F	F	M
LC 014A 07									0.625	15.88	4.10	0.073	0.189	4.80	F	F	M
LC 014A 08									0.688	17.46	3.80	0.068	0.206	5.23	F	F	M
LC 014A 09									0.750	19.05	3.40	0.061	0.223	5.66	F	F	M
LC 014A 9A									0.813	20.65	3.10	0.055	0.254	6.45	F	F	M
LC 014A 9B									0.875	22.23	2.90	0.052	0.269	6.84	F	F	M
LC 014A 9C									0.938	23.83	2.70	0.048	0.287	7.30	F	F	M
LC 014A 10									1.000	25.40	2.50	0.044	0.290	7.37	F	F	M
LC 014A 11									1.125	28.58	2.25	0.040	0.324	8.23	F	F	M
LC 014A 12	.120	3.05	.125	3.18	.016	.41	2.500	1.132	1.250	31.75	2.00	0.036	0.357	9.07	F	F	M
LC 014A 13									1.500	38.10	1.76	0.031	0.422	10.72	F	F	M
LC 016A 01									0.250	6.35	17.50	0.312	0.114	2.90	F	F	M
LC 016A 02									0.313	7.94	14.00	0.250	0.133	3.38	F	F	M
LC 016A 03									0.375	9.52	11.00	0.196	0.160	4.06	F	F	M
LC 016A 04									0.438	11.11	9.50	0.169	0.185	4.70	F	F	M
LC 016A 05									0.500	12.70	8.50	0.152	0.205	5.21	F	F	M
LC 016A 06									0.563	14.29	7.50	0.134	0.225	5.72	F	F	M
LC 016A 07									0.625	15.88	6.50	0.116	0.249	6.32	F	F	M
LC 016A 08									0.688	17.46	6.00	0.107	0.273	6.93	F	F	M
LC 016A 09									0.750	19.05	5.00	0.089	0.318	8.08	F	F	M
LC 016A 10									1.000	25.40	4.00	0.071	0.375	9.52	F	F	M
LC 016A 11									1.125	28.58	3.50	0.062	0.442	11.23	F	F	M
LC 016A 12	.120	3.05	.125	3.18	.018	.46	3.500	1.585	1.250	31.75	3.20	0.057	0.478	12.14	F	F	M
LC 016A 13									1.500	38.10	2.70	0.048	0.560	14.22	F	F	M
LC 018A 01									0.250	6.35	28.50	0.508	0.132	3.35	F	F	M
LC 018A 02									0.313	7.94	22.00	0.392	0.159	4.04	F	F	M
LC 018A 03									0.375	9.52	18.00	0.321	0.180	4.57	F	F	M
LC 018A 04									0.438	11.11	15.50	0.276	0.208	5.28	F	F	M
LC 018A 05									0.500	12.70	13.00	0.232	0.245	6.22	F	F	M
LC 018A 06									0.563	14.29	11.50	0.205	0.271	6.88	F	F	M
LC 018A 07									0.625	15.88	11.00	0.196	0.289	7.34	F	F	M
LC 018A 08									0.688	17.46	9.50	0.169	0.325	8.26	F	F	M
LC 018A 09									0.750	19.05	8.50	0.152	0.351	8.92	F	F	M
LC 018A 10									1.000	25.40	6.40	0.114	0.455	11.56	F	F	M
LC 018A 11									1.125	28.58	5.60	0.100	0.510	12.95	F	F	M
LC 018A 12	.120	3.05	.125	3.18	.018	.46	3.500	1.585	1.250	31.75	5.00	0.089	0.577	14.66	F	F	M
LC 018A 13									1.500	38.10	4.10	0.073	0.697	17.70	F	F	M



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 020A 01	.120	3.05	.125	3.18	.020	.51	4.750	2.151	0.250	6.35	47.50	0.847	0.150	3.81	F	F	M
LC 020A 02									0.313	7.94	36.00	0.642	0.185	4.70	F	F	M
LC 020A 03									0.375	9.52	29.00	0.517	0.215	5.46	F	F	M
LC 020A 04									0.438	11.11	24.50	0.437	0.250	6.35	F	F	M
LC 020A 05									0.500	12.70	21.50	0.383	0.280	7.11	F	F	M
LC 020A 06									0.563	14.29	18.50	0.330	0.310	7.87	F	F	M
LC 020A 07									0.625	15.88	16.50	0.294	0.345	8.76	F	F	M
LC 020A 08									0.688	17.46	15.00	0.267	0.375	9.52	F	F	M
LC 020A 09									0.750	19.05	13.50	0.241	0.410	10.41	F	F	M
LC 020A 10									0.813	20.64	12.50	0.223	0.430	10.92	F	F	M
LC 020A 11									0.938	23.81	10.75	0.192	0.510	12.95	F	F	M
LC 020A 12									1.000	25.40	10.00	0.178	0.540	13.72	F	F	M
LC 020A 13									1.125	28.58	9.00	0.160	0.600	15.24	F	F	M
LC 020A 14									1.250	31.75	8.00	0.143	0.660	16.76	F	F	M
LC 020A 15									1.500	38.10	6.50	0.116	0.790	20.07	F	F	M
LC 022A 01	.120	3.05	.125	3.18	.022	.56	6.000	2.717	0.250	6.35	70.00	1.248	0.166	4.22	F	F	M
LC 022A 02									0.313	7.94	54.00	0.963	0.199	5.05	F	F	M
LC 022A 03									0.375	9.52	42.00	0.749	0.243	6.17	F	F	M
LC 022A 04									0.438	11.11	36.00	0.642	0.276	7.01	F	F	M
LC 022A 05									0.500	12.70	31.00	0.553	0.309	7.85	F	F	M
LC 022A 06									0.563	14.29	28.00	0.499	0.342	8.69	F	F	M
LC 022A 07									0.625	15.88	25.00	0.446	0.374	9.50	F	F	M
LC 022A 08									0.688	17.46	22.00	0.392	0.419	10.64	F	F	M
LC 022A 09									0.750	19.05	20.00	0.357	0.451	11.46	F	F	M
LC 022A 10									0.813	20.64	18.00	0.321	0.510	12.95	F	F	M
LC 022A 11									0.938	23.81	16.00	0.285	0.555	14.10	F	F	M
LC 022A 12									1.000	25.40	15.00	0.267	0.600	15.24	F	F	M
LC 022A 13									1.125	28.58	13.00	0.232	0.665	16.89	F	F	M
LC 022A 14									1.250	31.75	11.75	0.210	0.758	19.25	F	F	M
LC 022A 15									1.500	38.10	9.70	0.173	0.902	22.91	F	F	M
LC 024A 01	.120	3.05	.125	3.18	.024	.61	8.200	3.720	0.250	6.35	107.40	1.918	0.179	4.54	F	F	M
LC 024A 02									0.312	7.92	82.20	1.468	0.219	5.55	F	F	M
LC 024A 03									0.375	9.53	66.30	1.185	0.259	6.58	F	F	M
LC 024A 04									0.438	11.13	55.60	0.993	0.299	7.60	F	F	M
LC 024A 05									0.500	12.70	48.00	0.857	0.339	8.61	F	F	M
LC 024A 06									0.562	14.27	42.20	0.754	0.379	9.62	F	F	M
LC 024A 07									0.625	15.88	37.60	0.671	0.419	10.65	F	F	M
LC 024A 08									0.687	17.45	34.00	0.606	0.459	11.66	F	F	M
LC 024A 09									0.750	19.05	30.90	0.552	0.499	12.68	F	F	M
LC 024A 10									0.812	20.62	28.40	0.507	0.539	13.69	F	F	M
LC 024A 11									0.875	22.23	26.20	0.468	0.579	14.72	F	F	M
LC 024A 12									0.937	23.80	24.40	0.436	0.619	15.73	F	F	M
LC 024A 13									1.000	25.40	22.80	0.407	0.660	16.75	F	F	M
LC 024A 14									1.125	28.58	20.10	0.360	0.740	18.79	F	F	M
LC 024A 15									1.250	31.75	18.00	0.322	0.820	20.82	F	F	M
LC 024A 16									1.500	38.10	14.90	0.267	0.980	24.89	F	F	M

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 014AA 01	.125	3.18	.141	3.57	.014	.36	1.553	.704	0.250	6.35	9.77	0.174	0.091	2.31	F	F	M
LC 014AA 02									0.313	7.95	7.61	0.136	0.109	2.76	F	F	M
LC 014AA 03									0.375	9.53	6.25	0.112	0.126	3.20	F	F	M
LC 014AA 04									0.438	11.13	5.29	0.094	0.144	3.65	F	F	M
LC 014AA 05									0.500	12.70	4.59	0.082	0.161	4.09	F	F	M
LC 014AA 06									0.563	14.30	4.05	0.072	0.179	4.54	F	F	M
LC 014AA 07									0.625	15.88	3.63	0.065	0.196	4.98	F	F	M
LC 014AA 08									0.688	17.48	3.29	0.059	0.214	5.43	F	F	M
LC 014AA 09									0.750	19.05	3.00	0.054	0.231	5.87	F	F	M
LC 014AA 10									0.813	20.65	2.76	0.049	0.249	6.32	F	F	M
LC 014AA 11									0.875	22.23	2.56	0.046	0.266	6.76	F	F	M
LC 014AA 12									0.938	23.83	2.38	0.043	0.284	7.21	F	F	M
LC 014AA 13									1.000	25.40	2.23	0.040	0.301	7.65	F	F	M
LC 014AA 14									1.125	28.58	1.98	0.035	0.336	8.54	F	F	M
LC 014AA 15									1.250	31.75	1.77	0.032	0.371	9.43	F	F	M
LC 014AA 16									1.375	34.93	1.61	0.029	0.406	10.32	F	F	M
LC 014AA 17									1.500	38.10	1.47	0.026	0.441	11.21	F	F	M
LC 016AA 01	.125	3.18	.141	3.57	.016	.41	2.719	1.233	0.250	6.35	18.29	0.327	0.101	2.57	F	F	M
LC 016AA 02									0.313	7.95	14.19	0.253	0.121	3.08	F	F	M
LC 016AA 03									0.375	9.53	11.62	0.208	0.141	3.57	F	F	M
LC 016AA 04									0.438	11.13	9.82	0.175	0.160	4.07	F	F	M
LC 016AA 05									0.500	12.70	8.52	0.152	0.180	4.57	F	F	M
LC 016AA 06									0.563	14.30	7.51	0.134	0.200	5.07	F	F	M
LC 016AA 07									0.625	15.88	6.72	0.120	0.219	5.56	F	F	M
LC 016AA 08									0.688	17.48	6.08	0.109	0.239	6.07	F	F	M
LC 016AA 09									0.750	19.05	5.55	0.099	0.258	6.56	F	F	M
LC 016AA 10									0.813	20.65	5.11	0.091	0.278	7.06	F	F	M
LC 016AA 11									0.938	23.83	4.40	0.079	0.317	8.06	F	F	M
LC 016AA 12									1.000	25.40	4.12	0.074	0.337	8.55	F	F	M
LC 016AA 13									1.250	31.75	3.27	0.058	0.415	10.54	F	F	M
LC 016AA 14									1.500	38.10	2.72	0.049	0.494	12.54	F	F	M
LC 018AA 01	.125	3.18	.141	3.57	.018	.46	3.679	1.669	0.250	6.35	28.47	0.508	0.121	3.07	F	F	M
LC 018AA 02									0.313	7.95	22.00	0.393	0.145	3.69	F	F	M
LC 018AA 03									0.375	9.53	18.00	0.321	0.170	4.31	F	F	M
LC 018AA 04									0.500	12.70	13.13	0.234	0.219	5.55	F	F	M
LC 018AA 05									0.563	14.30	11.56	0.206	0.243	6.18	F	F	M
LC 018AA 06									0.625	15.88	10.34	0.185	0.267	6.79	F	F	M
LC 018AA 07									0.688	17.48	9.34	0.167	0.292	7.42	F	F	M
LC 018AA 08									0.750	19.05	8.53	0.152	0.316	8.04	F	F	M
LC 018AA 09									0.813	20.65	7.84	0.140	0.341	8.66	F	F	M
LC 018AA 10									0.938	23.83	6.75	0.121	0.390	9.90	F	F	M
LC 018AA 11									1.000	25.40	6.32	0.113	0.414	10.52	F	F	M
LC 018AA 12									1.250	31.75	5.02	0.090	0.512	13.00	F	F	M
LC 018AA 13									1.500	38.10	4.16	0.074	0.610	15.49	F	F	M



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 020AA 01	.125	3.18	.141	3.57	.020	.51	5.629	2.553	0.250	6.35	47.41	0.847	0.131	3.33	F	F	M
LC 020AA 02									0.313	7.95	36.47	0.651	0.158	4.02	F	F	M
LC 020AA 03									0.375	9.53	30.97	0.553	0.185	4.70	F	F	M
LC 020AA 04									0.500	12.70	21.46	0.383	0.240	6.10	F	F	M
LC 020AA 05									0.563	14.30	18.73	0.334	0.269	6.84	F	F	M
LC 020AA 06									0.625	15.88	16.61	0.297	0.298	7.58	F	F	M
LC 020AA 07									0.688	17.48	14.88	0.266	0.328	8.34	F	F	M
LC 020AA 08									0.750	19.05	13.47	0.241	0.358	9.10	F	F	M
LC 020AA 09									0.813	20.65	12.37	0.221	0.386	9.82	F	F	M
LC 020AA 10									0.938	23.83	10.65	0.190	0.442	11.23	F	F	M
LC 020AA 11									1.000	25.40	9.96	0.178	0.470	11.94	F	F	M
LC 020AA 12									1.250	31.75	7.90	0.141	0.582	14.77	F	F	M
LC 020AA 13									1.500	38.10	6.55	0.117	0.693	17.61	F	F	M
LC 022AA 01	.125	3.18	.141	3.57	.022	.56	6.851	3.108	0.250	6.35	69.07	1.234	0.151	3.83	F	F	M
LC 022AA 02									0.313	7.95	52.90	0.945	0.183	4.65	F	F	M
LC 022AA 03									0.375	9.53	42.99	0.768	0.215	5.46	F	F	M
LC 022AA 04									0.500	12.70	31.20	0.557	0.279	7.08	F	F	M
LC 022AA 05									0.563	14.30	27.42	0.490	0.311	7.90	F	F	M
LC 022AA 06									0.625	15.88	24.49	0.437	0.343	8.71	F	F	M
LC 022AA 07									0.688	17.48	22.09	0.395	0.375	9.53	F	F	M
LC 022AA 08									0.813	20.65	18.50	0.330	0.439	11.15	F	F	M
LC 022AA 09									0.938	23.83	15.92	0.284	0.503	12.78	F	F	M
LC 022AA 10									1.000	25.40	15.00	0.268	0.531	13.49	F	F	M
LC 022AA 11									1.250	31.75	11.89	0.212	0.658	16.72	F	F	M
LC 022AA 12									1.500	38.10	9.85	0.176	0.785	19.94	F	F	M
LC 016AB 01	.148	3.76	.156	3.96	.016	.41	1.900	.861	0.250	6.35	11.90	0.211	0.092	2.35	F	F	M
LC 016AB 02									0.313	7.94	9.20	0.164	0.109	2.78	F	F	M
LC 016AB 03									0.375	9.53	7.50	0.134	0.126	3.21	F	F	M
LC 016AB 04									0.438	11.11	6.40	0.114	0.144	3.64	F	F	M
LC 016AB 05									0.500	12.70	5.50	0.098	0.161	4.08	F	F	M
LC 016AB 06									0.563	14.29	4.90	0.087	0.178	4.51	F	F	M
LC 016AB 07									0.625	15.88	4.40	0.078	0.195	4.94	F	F	M
LC 016AB 08									0.688	17.46	3.90	0.070	0.212	5.38	F	F	M
LC 016AB 09									0.750	19.05	3.60	0.064	0.229	5.81	F	F	M
LC 016AB 10									0.813	20.64	3.30	0.059	0.246	6.24	F	F	M
LC 016AB 11									0.938	23.83	2.90	0.051	0.280	7.11	F	F	M
LC 016AB 12									1.000	25.40	2.70	0.048	0.297	7.54	F	F	M
LC 016AB 13									1.250	31.75	2.10	0.038	0.365	9.27	F	F	M
LC 016AB 14									1.500	38.10	1.80	0.031	0.433	11.00	F	F	M

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 018AB 01	.148	3.76	.156	3.96	.018	.46	2.900	1.313	0.250	6.35	19.60	0.349	0.105	2.67	F	F	M
LC 018AB 02									0.313	7.94	15.20	0.270	0.125	3.17	F	F	M
LC 018AB 03									0.375	9.53	12.40	0.220	0.145	3.67	F	F	M
LC 018AB 04									0.438	11.11	10.40	0.186	0.164	4.18	F	F	M
LC 018AB 05									0.500	12.70	9.00	0.161	0.184	4.68	F	F	M
LC 018AB 06									0.563	14.29	8.00	0.142	0.204	5.18	F	F	M
LC 018AB 07									0.625	15.88	7.10	0.127	0.224	5.69	F	F	M
LC 018AB 08									0.688	17.46	6.40	0.115	0.244	6.19	F	F	M
LC 018AB 09									0.750	19.05	5.90	0.105	0.264	6.69	F	F	M
LC 018AB 10									0.813	20.64	5.40	0.096	0.283	7.20	F	F	M
LC 018AB 11									0.938	23.83	4.60	0.083	0.323	8.21	F	F	M
LC 018AB 12									1.000	25.40	4.30	0.077	0.343	8.71	F	F	M
LC 018AB 13									1.250	31.75	3.50	0.062	0.422	10.72	F	F	M
LC 018AB 14									1.500	38.10	2.90	0.051	0.501	12.73	F	F	M
LC 021AB 01	.148	3.76	.156	3.96	.021	.53	4.000	1.812	0.250	6.35	32.00	0.570	0.133	3.38	F	F	M
LC 021AB 02									0.313	7.94	25.00	0.446	0.160	4.06	F	F	M
LC 021AB 03									0.375	9.52	20.00	0.357	0.187	4.75	F	F	M
LC 021AB 04									0.438	11.11	17.00	0.303	0.214	5.44	F	F	M
LC 021AB 05									0.500	12.70	14.70	0.262	0.242	6.15	F	F	M
LC 021AB 06									0.563	14.29	13.00	0.232	0.268	6.81	F	F	M
LC 021AB 07									0.625	15.88	11.70	0.209	0.294	7.47	F	F	M
LC 021AB 08									0.688	17.46	10.50	0.187	0.321	8.15	F	F	M
LC 021AB 09									0.750	19.05	9.70	0.173	0.349	8.86	F	F	M
LC 021AB 10									0.813	20.64	8.90	0.159	0.376	9.55	F	F	M
LC 021AB 11									0.938	23.81	7.50	0.134	0.430	10.92	F	F	M
LC 021AB 12									1.000	25.40	7.00	0.125	0.479	12.17	F	F	M
LC 021AB 13									1.250	31.75	5.80	0.104	0.568	14.43	F	F	M
LC 021AB 14									1.500	38.10	4.80	0.086	0.675	17.15	F	F	M
LC 023AB 01	.148	3.76	.156	3.96	.023	.58	5.000	2.264	0.250	6.35	47.50	0.847	0.147	3.73	F	F	M
LC 023AB 02									0.313	7.94	36.50	0.651	0.178	4.52	F	F	M
LC 023AB 03									0.375	9.52	29.50	0.526	0.209	5.31	F	F	M
LC 023AB 04									0.438	11.11	25.40	0.453	0.239	6.07	F	F	M
LC 023AB 05									0.500	12.70	22.00	0.392	0.272	6.91	F	F	M
LC 023AB 06									0.563	14.29	19.00	0.339	0.302	7.67	F	F	M
LC 023AB 07									0.625	15.88	17.00	0.303	0.334	8.48	F	F	M
LC 023AB 08									0.688	17.46	15.50	0.276	0.364	9.24	F	F	M
LC 023AB 09									0.750	19.05	14.00	0.250	0.396	10.06	F	F	M
LC 023AB 10									0.813	20.64	12.75	0.227	0.425	10.80	F	F	M
LC 023AB 11									0.938	23.81	11.00	0.196	0.505	12.83	F	F	M
LC 023AB 12									1.000	25.40	10.30	0.184	0.536	13.61	F	F	M
LC 023AB 13									1.250	31.75	8.30	0.148	0.652	16.56	F	F	M
LC 023AB 14									1.500	38.10	6.90	0.123	0.773	19.63	F	F	M



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 016AC 01	.156	3.96	.172	4.37	.016	.41	1.761	.799	0.250	6.35	10.82	0.193	0.087	2.22	F	F	M
LC 016AC 02									0.313	7.95	8.39	0.150	0.103	2.61	F	F	M
LC 016AC 03									0.375	9.53	6.88	0.123	0.118	3.01	F	F	M
LC 016AC 04									0.438	11.13	5.81	0.104	0.134	3.40	F	F	M
LC 016AC 05									0.500	12.70	5.04	0.090	0.149	3.80	F	F	M
LC 016AC 06									0.563	14.30	4.44	0.079	0.165	4.20	F	F	M
LC 016AC 07									0.625	15.88	3.98	0.071	0.181	4.59	F	F	M
LC 016AC 08									0.688	17.48	3.60	0.064	0.196	4.99	F	F	M
LC 016AC 09									0.750	19.05	3.29	0.059	0.212	5.38	F	F	M
LC 016AC 10									1.000	25.40	2.45	0.044	0.274	6.96	F	F	M
LC 016AC 11									1.125	28.58	2.16	0.039	0.305	7.75	F	F	M
LC 016AC 12									1.250	31.75	1.94	0.035	0.336	8.54	F	F	M
LC 016AC 13									1.500	38.10	1.61	0.029	0.398	10.12	F	F	M
LC 023AD 01	.156	3.96	.172	4.37	.023	.58	5.525	2.506	0.250	6.35	48.13	0.861	0.135	3.43	F	F	M
LC 023AD 02									0.313	7.95	36.77	0.658	0.162	4.11	F	F	M
LC 023AD 03									0.375	9.53	29.84	0.534	0.189	4.80	F	F	M
LC 023AD 04									0.438	11.13	25.05	0.448	0.216	5.49	F	F	M
LC 023AD 05									0.500	12.70	21.63	0.387	0.243	6.17	F	F	M
LC 023AD 06									0.563	14.30	18.99	0.340	0.270	6.86	F	F	M
LC 023AD 07									0.625	15.88	16.96	0.304	0.297	7.54	F	F	M
LC 023AD 08									0.688	17.48	15.29	0.274	0.324	8.23	F	F	M
LC 023AD 09									0.750	19.05	13.95	0.250	0.350	8.89	F	F	M
LC 023AD 10									0.813	20.65	12.80	0.229	0.378	9.60	F	F	M
LC 023AD 11									0.938	23.83	11.01	0.197	0.431	10.95	F	F	M
LC 023AD 12									1.000	25.40	10.29	0.184	0.458	11.63	F	F	M
LC 023AD 13									1.250	31.75	8.15	0.146	0.566	14.38	F	F	M
LC 023AD 14									1.500	38.10	6.75	0.121	0.673	17.09	F	F	M
LC 014B 01	.180	4.57	.188	4.78	.014	.36	1.090	.490	0.250	6.35	5.78	0.103	0.069	1.75	F	F	M
LC 014B 02									0.313	7.92	4.53	0.081	0.077	1.96	F	F	M
LC 014B 03									0.375	9.53	3.71	0.066	0.086	2.18	F	F	M
LC 014B 04									0.438	11.10	3.14	0.056	0.094	2.39	F	F	M
LC 014B 05									0.500	12.70	2.72	0.049	0.103	2.62	F	F	M
LC 014B 06									0.563	14.27	2.40	0.043	0.112	2.84	F	F	M
LC 014B 07									0.625	15.88	2.15	0.038	0.120	3.05	F	F	M
LC 014B 08									0.688	17.45	1.95	0.035	0.129	3.28	F	F	M
LC 014B 09									0.750	19.05	1.78	0.032	0.138	3.51	F	F	M
LC 014B 10									0.875	22.23	1.52	0.027	0.155	3.94	F	F	M
LC 014B 11									1.000	25.40	1.32	0.024	0.172	4.37	F	F	M
LC 014B 12									1.250	31.75	1.05	0.019	0.206	5.23	F	F	M
LC 014B 13									1.375	34.93	0.95	0.017	0.223	5.66	F	F	M
LC 014B 14									1.500	38.10	0.87	0.016	0.240	6.10	F	F	M

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 016B 01	.180	4.57	.188	4.78	.016	.41	1.500	.679	0.250	6.35	9.00	0.160	0.073	1.85	F	F	M
LC 016B 02									0.313	7.94	7.50	0.134	0.081	2.06	F	F	M
LC 016B 03									0.375	9.52	6.00	0.107	0.093	2.36	F	F	M
LC 016B 04									0.438	11.11	5.00	0.089	0.105	2.67	F	F	M
LC 016B 05									0.500	12.70	4.50	0.080	0.113	2.87	F	F	M
LC 016B 06									0.563	14.29	4.00	0.071	0.125	3.18	F	F	M
LC 016B 07									0.625	15.88	3.50	0.062	0.137	3.48	F	F	M
LC 016B 08									0.688	17.46	3.00	0.053	0.153	3.89	F	F	M
LC 016B 09									0.750	19.05	2.50	0.044	0.177	4.50	F	F	M
LC 016B 10									0.875	22.22	2.20	0.039	0.195	4.95	F	F	M
LC 016B 11									1.000	25.40	1.90	0.034	0.220	5.59	F	F	M
LC 016B 12									1.250	31.75	1.50	0.027	0.277	7.04	F	F	M
LC 016B 13									1.375	34.92	1.30	0.023	0.305	7.75	F	F	M
LC 016B 14									1.500	38.10	1.20	0.021	0.342	8.69	F	F	M
LC 016B 15									1.750	44.45	0.98	0.017	0.405	10.28	F	F	M
LC 018B 01	.180	4.57	.188	4.78	.018	.46	2.375	1.076	0.250	6.35	13.50	0.241	0.086	2.18	F	F	M
LC 018B 02									0.313	7.94	11.00	0.196	0.100	2.54	F	F	M
LC 018B 03									0.375	9.52	9.00	0.160	0.114	2.90	F	F	M
LC 018B 04									0.438	11.11	8.00	0.143	0.123	3.12	F	F	M
LC 018B 05									0.500	12.70	7.00	0.125	0.132	3.35	F	F	M
LC 018B 06									0.563	14.29	6.00	0.107	0.150	3.81	F	F	M
LC 018B 07									0.625	15.88	5.00	0.089	0.172	4.37	F	F	M
LC 018B 08									0.688	17.46	4.50	0.080	0.186	4.72	F	F	M
LC 018B 09									0.750	19.05	4.00	0.071	0.199	5.05	F	F	M
LC 018B 10									0.875	22.22	3.60	0.064	0.221	5.61	F	F	M
LC 018B 11									1.000	25.40	3.10	0.055	0.256	6.50	F	F	M
LC 018B 12									1.250	31.75	2.50	0.044	0.302	7.67	F	F	M
LC 018B 13									1.375	34.92	2.25	0.040	0.338	8.58	F	F	M
LC 018B 14									1.500	38.10	2.00	0.036	0.374	9.50	F	F	M
LC 018B 15									1.750	44.45	1.69	0.030	0.442	11.22	F	F	M
LC 020B 01	.180	4.57	.188	4.78	.020	.51	3.125	1.415	0.250	6.35	21.00	0.374	0.107	2.72	F	F	M
LC 020B 02									0.313	7.94	16.00	0.285	0.125	3.18	F	F	M
LC 020B 03									0.375	9.52	12.75	0.227	0.144	3.66	F	F	M
LC 020B 04									0.438	11.11	11.00	0.196	0.160	4.06	F	F	M
LC 020B 05									0.500	12.70	9.25	0.165	0.180	4.57	F	F	M
LC 020B 06									0.563	14.29	8.25	0.147	0.196	4.98	F	F	M
LC 020B 07									0.625	15.88	7.25	0.129	0.214	5.44	F	F	M
LC 020B 08									0.688	17.46	6.50	0.116	0.234	5.94	F	F	M
LC 020B 09									0.750	19.05	6.00	0.107	0.250	6.35	F	F	M
LC 020B 10									0.875	22.22	5.10	0.091	0.285	7.24	F	F	M
LC 020B 11									1.000	25.40	4.50	0.080	0.315	8.00	F	F	M
LC 020B 12									1.250	31.75	3.50	0.062	0.385	9.78	F	F	M
LC 020B 13									1.375	34.92	3.20	0.057	0.420	10.67	F	F	M
LC 020B 14									1.500	38.10	2.90	0.052	0.450	11.43	F	F	M
LC 020B 15									1.750	44.45	2.44	0.043	0.530	13.46	F	F	M



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 022B 01	.180	4.57	.188	4.78	.022	.56	4.000	1.812	0.250	6.35	30.00	0.535	0.111	2.82	F	F	M
LC 022B 02									0.313	7.94	24.00	0.428	0.128	3.25	F	F	M
LC 022B 03									0.375	9.52	20.00	0.357	0.144	3.66	F	F	M
LC 022B 04									0.438	11.11	17.00	0.303	0.161	4.09	F	F	M
LC 022B 05									0.500	12.70	14.00	0.250	0.188	4.78	F	F	M
LC 022B 06									0.563	14.29	12.00	0.214	0.210	5.33	F	F	M
LC 022B 07									0.625	15.88	10.50	0.187	0.238	6.04	F	F	M
LC 022B 08									0.688	17.46	9.50	0.169	0.260	6.60	F	F	M
LC 022B 09									0.750	19.05	8.50	0.152	0.287	7.29	F	F	M
LC 022B 10									0.813	20.64	7.50	0.134	0.310	7.87	F	F	M
LC 022B 11									0.938	23.81	6.70	0.119	0.346	8.79	F	F	M
LC 022B 12									1.000	25.40	6.30	0.112	0.368	9.35	F	F	M
LC 022B 13									1.125	28.58	5.50	0.098	0.403	10.24	F	F	M
LC 022B 14									1.250	31.75	5.00	0.089	0.446	11.33	F	F	M
LC 022B 15									1.500	38.10	4.10	0.073	0.527	13.38	F	F	M
LC 022B 16									1.750	44.45	3.46	0.062	0.620	15.74	F	F	M
LC 024B 01	.180	4.57	.188	4.78	.024	.61	5.375	2.434	0.250	6.35	44.00	0.784	0.130	3.30	F	F	M
LC 024B 02									0.313	7.94	33.00	0.588	0.158	4.01	F	F	M
LC 024B 03									0.375	9.52	26.50	0.472	0.178	4.52	F	F	M
LC 024B 04									0.438	11.11	22.00	0.392	0.202	5.13	F	F	M
LC 024B 05									0.500	12.70	19.00	0.339	0.221	5.61	F	F	M
LC 024B 06									0.563	14.29	16.50	0.294	0.248	6.30	F	F	M
LC 024B 07									0.625	15.88	15.00	0.267	0.269	6.83	F	F	M
LC 024B 08									0.750	19.05	12.00	0.214	0.322	8.18	F	F	M
LC 024B 09									0.875	22.22	10.25	0.183	0.370	9.40	F	F	M
LC 024B 10									1.000	25.40	9.00	0.160	0.416	10.57	F	F	M
LC 024B 11									1.125	28.58	7.75	0.138	0.466	11.84	F	F	M
LC 024B 12									1.250	31.75	7.00	0.125	0.510	12.95	F	F	M
LC 024B 13									1.500	38.10	5.75	0.102	0.598	15.19	F	F	M
LC 024B 14									1.750	44.45	5.00	0.089	0.672	17.07	F	F	M
LC 024B 15									2.000	50.80	4.30	0.077	0.769	19.53	F	F	M
LC 026B 01	.180	4.57	.188	4.78	.026	.66	6.750	3.057	0.250	6.35	60.00	1.070	0.138	3.50	F	F	M
LC 026B 02									0.313	7.94	47.00	0.838	0.157	3.99	F	F	M
LC 026B 03									0.375	9.52	37.00	0.660	0.190	4.83	F	F	M
LC 026B 04									0.438	11.11	31.00	0.553	0.215	5.46	F	F	M
LC 026B 05									0.500	12.70	27.00	0.481	0.235	5.97	F	F	M
LC 026B 06									0.563	14.29	23.00	0.410	0.274	6.96	F	F	M
LC 026B 07									0.625	15.88	21.00	0.374	0.287	7.29	F	F	M
LC 026B 08									0.688	17.46	19.00	0.339	0.313	7.95	F	F	M
LC 026B 09									0.750	19.05	17.00	0.303	0.345	8.76	F	F	M
LC 026B 10									0.813	20.64	16.00	0.285	0.365	9.27	F	F	M
LC 026B 11									0.875	22.22	15.00	0.267	0.391	9.93	F	F	M
LC 026B 12									1.000	25.40	12.25	0.218	0.453	11.51	F	F	M
LC 026B 13									1.125	28.58	10.80	0.192	0.512	13.00	F	F	M
LC 026B 14									1.250	31.75	9.70	0.173	0.552	14.02	F	F	M
LC 026B 15									1.500	38.10	8.00	0.143	0.680	17.27	F	F	M
LC 026B 16									1.750	44.45	6.90	0.123	0.766	19.46	F	F	M
LC 026B 17									2.000	50.80	6.00	0.107	0.871	22.12	F	F	M

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 029B 0	.180	4.57	.188	4.78	.029	.74	9.500	4.302	0.250	6.35	97.80	1.747	0.159	4.04	F	F	M
LC 029B 01									0.313	7.94	76.00	1.355	0.187	4.75	F	F	M
LC 029B 02									0.375	9.52	61.00	1.088	0.220	5.59	F	F	M
LC 029B 03									0.438	11.11	50.00	0.892	0.249	6.32	F	F	M
LC 029B 04									0.500	12.70	43.00	0.767	0.280	7.11	F	F	M
LC 029B 05									0.563	14.29	37.50	0.669	0.315	8.00	F	F	M
LC 029B 06									0.625	15.88	33.00	0.588	0.344	8.74	F	F	M
LC 029B 07									0.688	17.46	30.00	0.535	0.372	9.45	F	F	M
LC 029B 08									0.750	19.05	27.00	0.481	0.410	10.41	F	F	M
LC 029B 09									0.813	20.64	25.00	0.446	0.437	11.10	F	F	M
LC 029B 10									0.875	22.22	23.00	0.410	0.468	11.89	F	F	M
LC 029B 11									0.938	23.81	21.25	0.379	0.502	12.75	F	F	M
LC 029B 12									1.000	25.40	19.50	0.348	0.532	13.51	F	F	M
LC 029B 13									1.125	28.58	17.50	0.312	0.590	14.99	F	F	M
LC 029B 14									1.250	31.75	15.50	0.276	0.647	16.43	F	F	M
LC 029B 15									1.375	34.92	14.00	0.250	0.715	18.16	F	F	M
LC 029B 16									1.500	38.10	12.75	0.227	0.770	19.56	F	F	M
LC 029B 17									1.750	44.45	10.80	0.192	0.885	22.48	F	F	M
LC 029B 18									2.000	50.80	9.50	0.169	1.015	25.78	F	F	M
LC 032B 01	.180	4.57	.188	4.78	.032	.81	12.500	5.670	0.313	7.94	122.00	2.175	0.193	4.90	F	F	M
LC 032B 02									0.375	9.52	95.00	1.694	0.233	5.92	F	F	M
LC 032B 03									0.438	11.11	80.00	1.426	0.257	6.53	F	F	M
LC 032B 04									0.500	12.70	65.00	1.159	0.305	7.75	F	F	M
LC 032B 05									0.563	14.29	58.00	1.034	0.337	8.56	F	F	M
LC 032B 06									0.625	15.88	51.00	0.909	0.369	9.37	F	F	M
LC 032B 07									0.688	17.46	47.00	0.838	0.393	9.98	F	F	M
LC 032B 08									0.750	19.05	41.00	0.731	0.450	11.43	F	F	M
LC 032B 09									0.813	20.64	37.00	0.660	0.481	12.22	F	F	M
LC 032B 10									0.875	22.22	34.00	0.606	0.530	13.46	F	F	M
LC 032B 11									0.938	23.81	32.00	0.570	0.561	14.25	F	F	M
LC 032B 12									1.000	25.40	29.00	0.517	0.601	15.27	F	F	M
LC 032B 13									1.125	28.58	26.00	0.464	0.674	17.12	G	G	N
LC 032B 14									1.250	31.75	23.50	0.419	0.739	18.77	G	G	N
LC 032B 15									1.375	34.92	21.00	0.374	0.819	20.80	G	G	N
LC 032B 16									1.500	38.10	19.50	0.348	0.877	22.28	G	G	N
LC 032B 17									1.750	44.45	16.50	0.294	0.994	25.25	G	G	N
LC 032B 18									2.000	50.80	14.20	0.253	1.181	30.00	G	G	N



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 035B 01	.180	4.57	.188	4.78	.035	.89	16.610	7.540	0.375	9.53	139.20	2.486	0.263	6.69	F	F	M
LC 035B 02									0.438	11.13	115.37	2.060	0.303	7.69	F	F	M
LC 035B 03									0.500	12.70	98.73	1.763	0.342	8.68	F	F	M
LC 035B 04									0.563	14.30	86.12	1.538	0.381	9.68	F	F	M
LC 035B 05									0.625	15.88	76.50	1.366	0.420	10.67	F	F	M
LC 035B 06									0.688	17.48	68.70	1.227	0.460	11.67	F	F	M
LC 035B 07									0.750	19.05	62.43	1.115	0.498	12.66	F	F	M
LC 035B 08									0.813	20.65	57.14	1.020	0.538	13.66	G	G	N
LC 035B 09									0.875	22.23	52.74	0.942	0.577	14.65	G	G	N
LC 035B 10									0.938	22.83	48.91	0.873	0.616	15.65	G	G	N
LC 035B 11									1.000	25.40	45.65	0.815	0.655	16.64	G	G	N
LC 035B 12									1.125	28.58	40.24	0.719	0.734	18.63	G	G	N
LC 035B 13									1.250	31.75	35.98	0.643	0.812	20.62	G	G	N
LC 035B 14									1.375	34.93	32.53	0.581	0.890	22.61	G	G	N
LC 035B 15									1.500	38.10	29.69	0.530	0.969	24.60	G	G	N
LC 035B 16									1.750	44.45	25.27	0.451	1.125	28.58	G	G	N
LC 035B 17									2.000	50.80	22.00	0.393	1.282	32.57	G	G	N
LC 035B 18									2.250	57.15	19.47	0.348	1.439	36.55	G	G	N
LC 014BB 01	.188	4.78	.203	5.16	.014	.36	.594	.269	0.250	6.35	3.40	0.061	0.075	1.91	F	F	M
LC 014BB 02									0.313	7.95	2.65	0.047	0.088	2.25	F	F	M
LC 014BB 03									0.375	9.53	2.17	0.039	0.101	2.58	F	F	M
LC 014BB 04									0.438	11.13	1.84	0.033	0.115	2.91	F	F	M
LC 014BB 05									0.500	12.70	1.60	0.029	0.128	3.24	F	F	M
LC 014BB 06									0.563	14.30	1.41	0.025	0.141	3.57	F	F	M
LC 014BB 07									0.625	15.88	1.26	0.023	0.154	3.90	F	F	M
LC 014BB 08									0.750	19.05	1.04	0.019	0.180	4.57	F	F	M
LC 014BB 09									0.875	22.23	0.89	0.016	0.206	5.23	F	F	M
LC 014BB 10									1.000	25.40	0.78	0.014	0.232	5.90	F	F	M
LC 014BB 11									1.250	31.75	0.62	0.011	0.284	7.22	F	F	M
LC 014BB 12									1.375	34.93	0.56	0.010	0.311	7.89	F	F	M
LC 014BB 13									1.500	38.10	0.51	0.009	0.337	8.55	F	F	M
LC 014BB 14									1.750	44.45	0.44	0.008	0.389	9.88	F	F	M
LC 018BB 01	.188	4.78	.203	5.16	.018	.46	2.509	1.138	0.250	6.35	14.57	0.260	0.078	1.98	F	F	M
LC 018BB 02									0.313	7.95	11.26	0.201	0.090	2.28	F	F	M
LC 018BB 03									0.375	9.53	9.20	0.164	0.102	2.58	F	F	M
LC 018BB 04									0.438	11.13	7.76	0.139	0.114	2.89	F	F	M
LC 018BB 05									0.500	12.70	7.00	0.125	0.122	3.11	F	F	M
LC 018BB 06									0.563	14.30	5.92	0.106	0.137	3.49	F	F	M
LC 018BB 07									0.625	15.88	5.29	0.095	0.149	3.79	F	F	M
LC 018BB 08									0.688	17.48	4.78	0.085	0.161	4.10	F	F	M
LC 018BB 09									0.750	19.05	4.37	0.078	0.173	4.40	F	F	M
LC 018BB 10									0.875	22.23	3.72	0.066	0.197	5.00	F	F	M
LC 018BB 11									0.938	23.83	3.46	0.062	0.209	5.31	F	F	M
LC 018BB 12									1.000	25.40	3.10	0.055	0.237	6.03	F	F	M
LC 018BB 13									1.125	28.58	2.86	0.051	0.245	6.21	F	F	M
LC 018BB 14									1.250	31.75	2.57	0.046	0.268	6.82	F	F	M
LC 018BB 15									1.500	38.10	2.13	0.038	0.316	8.03	F	F	M
LC 018BB 16									1.750	44.45	1.82	0.032	0.364	9.24	F	F	M

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 020BB 01	.188	4.78	.203	5.16	.020	.51	3.212	1.457	0.250	6.35	20.42	0.365	0.093	2.36	F	F	M
LC 020BB 02									0.313	7.95	15.71	0.280	0.108	2.75	F	F	M
LC 020BB 03									0.375	9.53	12.80	0.229	0.123	3.13	F	F	M
LC 020BB 04									0.438	11.13	10.77	0.192	0.139	3.53	F	F	M
LC 020BB 05									0.500	12.70	9.32	0.166	0.154	3.91	F	F	M
LC 020BB 06									0.563	14.30	8.20	0.146	0.170	4.31	F	F	M
LC 020BB 07									0.625	15.88	7.33	0.131	0.185	4.69	F	F	M
LC 020BB 08									0.688	17.48	6.62	0.118	0.200	5.09	F	F	M
LC 020BB 09									0.750	19.05	6.04	0.108	0.215	5.47	F	F	M
LC 020BB 10									0.875	22.23	5.14	0.092	0.246	6.25	F	F	M
LC 020BB 11									0.938	23.83	4.78	0.085	0.262	6.64	F	F	M
LC 020BB 12									1.000	25.40	4.47	0.080	0.277	7.03	F	F	M
LC 020BB 13									1.125	28.58	3.95	0.071	0.307	7.81	F	F	M
LC 020BB 14									1.250	31.75	3.54	0.063	0.338	8.59	F	F	M
LC 020BB 15									1.500	38.10	2.94	0.052	0.399	10.15	F	F	M
LC 020BB 16									1.750	44.45	2.51	0.045	0.461	11.70	F	F	M
LC 023BB 01	.188	4.78	.203	5.16	.023	.58	4.000	1.814	0.250	6.35	30.77	0.549	0.120	3.05	F	F	M
LC 023BB 02									0.313	7.95	23.51	0.420	0.142	3.62	F	F	M
LC 023BB 03									0.375	9.53	19.08	0.341	0.164	4.18	F	F	M
LC 023BB 04									0.438	11.13	16.01	0.286	0.187	4.75	F	F	M
LC 023BB 05									0.500	12.70	13.82	0.247	0.209	5.31	F	F	M
LC 023BB 06									0.563	14.30	12.14	0.217	0.231	5.88	F	F	M
LC 023BB 07									0.625	15.88	10.84	0.194	0.253	6.44	F	F	M
LC 023BB 08									0.750	19.05	8.92	0.159	0.298	7.57	F	F	M
LC 023BB 09									0.875	22.23	7.57	0.135	0.342	8.70	F	F	M
LC 023BB 10									1.000	25.40	6.58	0.117	0.387	9.83	F	F	M
LC 023BB 11									1.250	31.75	5.21	0.093	0.476	12.09	F	F	M
LC 023BB 12									1.375	34.93	4.72	0.084	0.520	13.22	F	F	M
LC 023BB 13									1.500	38.10	4.32	0.077	0.565	14.35	F	F	M
LC 023BB 14									1.750	44.45	3.65	0.065	0.654	16.61	F	F	M
LC 023BB 15									2.000	50.80	3.18	0.057	0.743	18.87	F	F	M
LC 026BB 01	.188	4.78	.203	5.16	.026	.66	7.683	3.485	0.250	6.35	61.09	1.091	0.124	3.16	F	F	M
LC 026BB 02									0.313	7.95	46.35	0.828	0.147	3.73	F	F	M
LC 026BB 03									0.375	9.53	37.45	0.669	0.169	4.29	F	F	M
LC 026BB 04									0.438	11.13	31.34	0.560	0.191	4.86	F	F	M
LC 026BB 05									0.500	12.70	27.00	0.482	0.213	5.42	F	F	M
LC 026BB 06									0.563	14.30	23.67	0.423	0.236	5.99	F	F	M
LC 026BB 07									0.625	15.88	21.11	0.377	0.258	6.56	F	F	M
LC 026BB 08									0.688	17.48	19.02	0.340	0.281	7.13	F	F	M
LC 026BB 09									0.750	19.05	17.33	0.309	0.303	7.69	F	F	M
LC 026BB 10									0.875	22.23	14.70	0.262	0.347	8.82	F	F	M
LC 026BB 11									0.938	23.83	13.65	0.244	0.370	9.39	F	F	M
LC 026BB 12									1.000	25.40	12.20	0.218	0.398	10.12	F	F	M
LC 026BB 13									1.125	28.58	11.19	0.200	0.439	11.16	F	F	M
LC 026BB 14									1.250	31.75	10.03	0.179	0.484	12.30	F	F	M
LC 026BB 15									1.500	38.10	8.30	0.148	0.574	14.58	F	F	M
LC 026BB 16									1.750	44.45	7.07	0.126	0.664	16.86	F	F	M



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 029BB 01	.188	4.78	.203	5.16	.029	.74	10.630	4.822	0.250	6.35	97.31	1.738	0.141	3.58	F	F	M
LC 029BB 02									0.313	7.95	73.27	1.308	0.167	4.25	F	F	M
LC 029BB 03									0.375	9.53	58.94	1.053	0.193	4.92	F	F	M
LC 029BB 04									0.438	11.13	49.17	0.878	0.220	5.59	F	F	M
LC 029BB 05									0.500	12.70	42.27	0.755	0.246	6.25	F	F	M
LC 029BB 06									0.563	14.30	37.00	0.661	0.273	6.93	F	F	M
LC 029BB 07									0.625	15.88	32.95	0.588	0.299	7.59	F	F	M
LC 029BB 08									0.688	17.48	29.66	0.530	0.326	8.27	F	F	M
LC 029BB 09									0.750	19.05	27.00	0.482	0.352	8.93	F	F	M
LC 029BB 10									0.813	20.65	24.75	0.442	0.378	9.61	F	F	M
LC 029BB 11									0.875	22.23	22.87	0.408	0.404	10.27	F	F	M
LC 029BB 12									0.938	23.83	21.23	0.379	0.431	10.95	F	F	M
LC 029BB 13									1.125	28.58	17.51	0.313	0.510	12.95	F	F	M
LC 029BB 14									1.250	31.75	15.67	0.280	0.563	14.29	F	F	M
LC 029BB 15									1.375	34.93	14.19	0.253	0.615	15.63	F	F	M
LC 029BB 16									1.500	38.10	12.80	0.229	0.668	16.97	F	F	M
LC 029BB 17									1.750	44.45	11.04	0.197	0.774	19.65	F	F	M
LC 029BB 18									2.000	50.80	9.62	0.172	0.879	22.33	F	F	M
LC 032BB 01	.188	4.78	.203	5.16	.032	.81	14.110	6.399	0.250	6.35	151.54	2.706	0.157	3.99	F	F	M
LC 032BB 02									0.313	7.95	113.20	2.021	0.188	4.77	F	F	M
LC 032BB 03									0.375	9.53	90.63	1.618	0.218	5.54	F	F	M
LC 032BB 04									0.438	11.13	75.36	1.346	0.249	6.32	F	F	M
LC 032BB 05									0.500	12.70	64.65	1.154	0.279	7.09	F	F	M
LC 032BB 06									0.563	14.30	56.49	1.009	0.310	7.87	F	F	M
LC 032BB 07									0.625	15.88	50.24	0.897	0.340	8.65	F	F	M
LC 032BB 08									0.688	17.48	45.17	0.807	0.371	9.43	F	F	M
LC 032BB 09									0.750	19.05	41.09	0.734	0.401	10.20	F	F	M
LC 032BB 10									0.813	20.65	37.63	0.672	0.432	10.98	F	F	M
LC 032BB 11									0.875	22.23	34.75	0.621	0.463	11.75	F	F	M
LC 032BB 12									0.938	23.83	32.25	0.576	0.493	12.53	F	F	M
LC 032BB 13									1.000	25.40	30.11	0.538	0.524	13.30	F	F	M
LC 032BB 14									1.125	28.58	26.57	0.474	0.585	14.86	G	G	N
LC 032BB 15									1.250	31.75	23.77	0.424	0.646	16.41	G	G	N
LC 032BB 16									1.375	34.93	21.50	0.384	0.707	17.96	G	G	N
LC 032BB 17									1.500	38.10	19.40	0.346	0.768	19.52	G	G	N
LC 032BB 18									1.750	44.45	16.72	0.299	0.891	22.62	G	G	N
LC 032BB 19									2.000	50.80	14.56	0.260	1.013	25.73	G	G	N

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 018BC 01	.210	5.33	.219	5.56	.018	.46	2.000	.910	0.250	6.35	11.10	0.199	0.074	1.88	G	G	N
LC 018BC 02									0.313	7.95	8.60	0.153	0.085	2.16	G	G	N
LC 018BC 03									0.375	9.53	7.00	0.125	0.096	2.43	G	G	N
LC 018BC 04									0.438	11.13	5.90	0.106	0.107	2.71	G	G	N
LC 018BC 05									0.500	12.70	5.10	0.092	0.117	2.98	G	G	N
LC 018BC 06									0.563	14.30	4.50	0.081	0.128	3.26	G	G	N
LC 018BC 07									0.625	15.88	4.00	0.072	0.139	3.53	G	G	N
LC 018BC 08									0.688	17.48	3.70	0.065	0.150	3.81	G	G	N
LC 018BC 09									0.750	19.05	3.30	0.060	0.161	4.08	G	G	N
LC 018BC 10									0.813	20.65	3.10	0.055	0.172	4.36	G	G	N
LC 018BC 11									0.880	22.35	2.80	0.050	0.183	4.66	G	G	N
LC 018BC 12									1.000	25.40	2.50	0.044	0.204	5.18	G	G	N
LC 018BC 13									1.250	31.75	2.00	0.035	0.247	6.28	G	G	N
LC 018BC 14									1.500	38.10	1.60	0.029	0.291	7.39	G	G	N
LC 018BC 15									1.750	44.45	1.40	0.025	0.332	8.43	G	G	N
LC 018BC 16									2.000	50.80	1.20	0.021	0.381	9.67	G	G	N
LC 022BC 00	.210	5.33	.219	5.56	.022	.56	3.000	1.359	0.250	6.35	19.80	0.354	0.112	2.84	G	G	N
LC 022BC 0									0.313	7.92	15.20	0.271	0.130	3.30	G	G	N
LC 022BC 01									0.375	9.52	12.25	0.218	0.139	3.53	G	G	N
LC 022BC 02									0.438	11.11	10.50	0.187	0.156	3.96	G	G	N
LC 022BC 03									0.500	12.70	9.00	0.160	0.174	4.42	G	G	N
LC 022BC 04									0.563	14.29	7.90	0.141	0.193	4.90	G	G	N
LC 022BC 05									0.625	15.88	7.00	0.125	0.209	5.31	G	G	N
LC 022BC 06									0.688	17.46	6.30	0.112	0.229	5.82	G	G	N
LC 022BC 07									0.750	19.05	5.70	0.102	0.246	6.25	G	G	N
LC 022BC 08									0.813	20.64	5.25	0.094	0.264	6.70	G	G	N
LC 022BC 09									1.000	25.40	4.20	0.075	0.317	8.05	G	G	N
LC 022BC 10									1.250	31.75	3.40	0.061	0.389	9.88	G	G	N
LC 022BC 11									1.500	38.10	2.75	0.049	0.476	12.09	G	G	N
LC 022BC 12									1.750	44.45	2.39	0.043	0.547	13.89	G	G	N
LC 022BC 13									2.000	50.80	2.08	0.037	0.621	15.78	G	G	N
LC 026BC 00	.210	5.33	.219	5.56	.026	.66	5.000	2.264	0.250	6.35	38.40	0.686	0.137	3.48	G	G	N
LC 026BC 0									0.313	7.92	29.30	0.523	0.160	4.06	G	G	N
LC 026BC 01									0.375	9.52	23.50	0.419	0.176	4.47	G	G	N
LC 026BC 02									0.438	11.11	19.80	0.353	0.200	5.08	G	G	N
LC 026BC 03									0.500	12.70	17.00	0.303	0.224	5.69	G	G	N
LC 026BC 04									0.563	14.29	15.00	0.267	0.247	6.27	G	G	N
LC 026BC 05									0.625	15.88	13.00	0.232	0.271	6.88	G	G	N
LC 026BC 06									0.688	17.46	12.00	0.214	0.294	7.47	G	G	N
LC 026BC 07									0.750	19.05	11.00	0.196	0.319	8.10	G	G	N
LC 026BC 08									0.813	20.64	10.00	0.178	0.344	8.74	G	G	N
LC 026BC 09									1.000	25.40	8.00	0.143	0.416	10.57	G	G	N
LC 026BC 10									1.250	31.75	6.30	0.112	0.510	12.95	G	G	N
LC 026BC 11									1.500	38.10	5.25	0.094	0.605	15.37	G	G	N
LC 026BC 12									1.750	44.45	4.47	0.080	0.713	18.10	G	G	N
LC 026BC 13									2.000	50.80	3.90	0.070	0.809	20.55	G	G	N



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 016BD 01	.218	5.54	.234	5.95	.016	.41	.825	.374	0.250	6.35	4.71	0.084	0.075	1.90	G	G	N
LC 016BD 02									0.313	7.95	3.65	0.065	0.087	2.21	G	G	N
LC 016BD 03									0.375	9.53	2.99	0.053	0.099	2.51	G	G	N
LC 016BD 04									0.438	11.13	2.53	0.045	0.111	2.81	G	G	N
LC 016BD 05									0.500	12.70	2.19	0.039	0.123	3.12	G	G	N
LC 016BD 06									0.563	14.30	1.93	0.034	0.135	3.42	G	G	N
LC 016BD 07									0.625	15.88	1.73	0.031	0.147	3.72	G	G	N
LC 016BD 08									0.750	19.05	1.43	0.026	0.171	4.33	G	G	N
LC 016BD 09									0.875	22.23	1.22	0.022	0.194	4.94	G	G	N
LC 016BD 10									1.000	25.40	1.06	0.019	0.218	5.55	G	G	N
LC 016BD 11									1.250	31.75	0.84	0.015	0.266	6.77	G	G	N
LC 016BD 12									1.375	34.93	0.76	0.014	0.290	7.37	G	G	N
LC 016BD 13									1.500	38.10	0.70	0.012	0.314	7.98	G	G	N
LC 016BD 14									1.750	44.45	0.60	0.011	0.362	9.20	G	G	N
LC 018BD 01	.218	5.54	.234	5.95	.018	.46	.982	.446	0.250	6.35	6.33	0.113	0.095	2.41	G	G	N
LC 018BD 02									0.313	7.95	4.89	0.087	0.112	2.84	G	G	N
LC 018BD 03									0.375	9.53	3.99	0.071	0.128	3.26	G	G	N
LC 018BD 04									0.438	11.13	3.37	0.060	0.145	3.69	G	G	N
LC 018BD 05									0.500	12.70	2.92	0.052	0.162	4.12	G	G	N
LC 018BD 06									0.563	14.30	2.57	0.046	0.179	4.55	G	G	N
LC 018BD 07									0.625	15.88	2.30	0.041	0.196	4.97	G	G	N
LC 018BD 08									0.750	19.05	1.90	0.034	0.230	5.83	G	G	N
LC 018BD 09									0.875	22.23	1.61	0.029	0.263	6.69	G	G	N
LC 018BD 10									1.000	25.40	1.40	0.025	0.297	7.54	G	G	N
LC 018BD 11									1.250	31.75	1.12	0.020	0.364	9.25	G	G	N
LC 018BD 12									1.375	34.93	1.01	0.018	0.398	10.11	G	G	N
LC 018BD 13									1.500	38.10	0.92	0.017	0.432	10.96	G	G	N
LC 018BD 14									1.750	44.45	0.79	0.014	0.499	12.68	G	G	N
LC 020BD 01	.218	5.54	.234	5.95	.020	.51	2.376	1.078	0.250	6.35	14.43	0.258	0.085	2.17	G	G	N
LC 020BD 02									0.313	7.95	11.10	0.198	0.099	2.50	G	G	N
LC 020BD 03									0.375	9.53	9.05	0.162	0.112	2.84	G	G	N
LC 020BD 04									0.438	11.13	7.61	0.136	0.125	3.17	G	G	N
LC 020BD 05									0.500	12.70	6.59	0.118	0.138	3.50	G	G	N
LC 020BD 06									0.563	14.30	5.79	0.103	0.151	3.84	G	G	N
LC 020BD 07									0.625	15.88	5.18	0.093	0.164	4.17	G	G	N
LC 020BD 08									0.688	17.48	4.68	0.084	0.177	4.51	G	G	N
LC 020BD 09									0.750	19.05	4.27	0.076	0.190	4.84	G	G	N
LC 020BD 10									0.875	22.23	3.63	0.065	0.217	5.50	G	G	N
LC 020BD 11									1.000	25.40	3.16	0.056	0.243	6.17	G	G	N
LC 020BD 12									1.250	31.75	2.50	0.045	0.296	7.51	G	G	N
LC 020BD 13									1.375	34.93	2.27	0.041	0.322	8.17	G	G	N
LC 020BD 14									1.500	38.10	2.08	0.037	0.348	8.84	G	G	N
LC 020BD 15									1.750	44.45	1.77	0.032	0.401	10.18	G	G	N

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 028BD 01	.218	5.54	.234	5.95	.028	.71	6.649	3.016	0.250	6.35	54.73	0.977	0.129	3.26	G	G	N
LC 028BD 02									0.313	7.95	41.31	0.738	0.152	3.85	G	G	N
LC 028BD 03									0.375	9.53	33.29	0.594	0.174	4.42	G	G	N
LC 028BD 04									0.438	11.13	27.80	0.496	0.197	5.01	G	G	N
LC 028BD 05									0.500	12.70	23.91	0.427	0.220	5.58	G	G	N
LC 028BD 06									0.563	14.30	20.94	0.374	0.243	6.17	G	G	N
LC 028BD 07									0.625	15.88	18.66	0.333	0.265	6.74	G	G	N
LC 028BD 08									0.688	17.48	16.80	0.300	0.288	7.33	G	G	N
LC 028BD 09									0.750	19.05	15.30	0.273	0.311	7.90	G	G	N
LC 028BD 10									0.875	22.23	12.96	0.232	0.357	9.06	G	G	N
LC 028BD 11									1.000	25.40	11.25	0.201	0.402	10.22	G	G	N
LC 028BD 12									1.250	31.75	8.89	0.159	0.494	12.54	G	G	N
LC 028BD 13									1.375	34.93	8.05	0.144	0.539	13.70	G	G	N
LC 028BD 14									1.500	38.10	7.35	0.131	0.585	14.86	G	G	N
LC 028BD 15									1.750	44.45	6.27	0.112	0.676	17.18	G	G	N
LC 016C 01	.240	6.10	.250	6.35	.016	.41	1.200	.550	0.250	6.35	6.20	0.111	0.056	1.43	F	F	M
LC 016C 02									0.312	7.92	4.83	0.086	0.063	1.60	F	F	M
LC 016C 03									0.375	9.53	3.94	0.070	0.070	1.77	F	F	M
LC 016C 04									0.438	11.13	3.33	0.059	0.076	1.94	F	F	M
LC 016C 05									0.500	12.70	2.89	0.052	0.083	2.11	F	F	M
LC 016C 06									0.562	14.27	2.55	0.046	0.089	2.27	F	F	M
LC 016C 07									0.625	15.88	2.28	0.041	0.096	2.44	F	F	M
LC 016C 08									0.687	17.45	2.06	0.037	0.103	2.61	F	F	M
LC 016C 09									0.750	19.05	1.88	0.034	0.110	2.78	F	F	M
LC 016C 10									0.812	20.62	1.73	0.031	0.116	2.95	G	G	N
LC 016C 11									0.875	22.23	1.60	0.029	0.123	3.12	G	G	N
LC 016C 12									0.937	23.80	1.49	0.027	0.129	3.29	G	G	N
LC 016C 13									1.000	25.40	1.40	0.025	0.136	3.46	G	G	N
LC 016C 14									1.250	31.75	1.11	0.020	0.163	4.14	G	G	N
LC 016C 15									1.500	38.10	0.92	0.016	0.190	4.81	G	G	N
LC 016C 16									1.750	44.45	0.80	0.014	0.213	5.41	G	G	N
LC 016C 17									2.000	50.80	0.70	0.013	0.239	6.07	G	G	N



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 018C 01	.240	6.10	.250	6.35	.018	.46	1.750	.790	0.250	6.35	9.40	0.168	0.066	1.66	F	F	M
LC 018C 02									0.312	7.92	7.30	0.130	0.074	1.87	F	F	M
LC 018C 03									0.375	9.53	5.90	0.106	0.082	2.09	F	F	M
LC 018C 04									0.438	11.13	5.00	0.089	0.091	2.30	F	F	M
LC 018C 05									0.500	12.70	4.30	0.077	0.099	2.51	F	F	M
LC 018C 06									0.562	14.27	3.80	0.068	0.107	2.72	F	F	M
LC 018C 07									0.625	15.88	3.40	0.061	0.115	2.93	F	F	M
LC 018C 08									0.687	17.45	3.10	0.055	0.124	3.14	F	F	M
LC 018C 09									0.750	19.05	2.80	0.050	0.132	3.35	F	F	M
LC 018C 10									0.812	20.62	2.60	0.046	0.140	3.56	G	G	N
LC 018C 11									0.875	22.23	2.40	0.043	0.149	3.77	G	G	N
LC 018C 12									0.937	23.80	2.20	0.040	0.157	3.98	G	G	N
LC 018C 13									1.000	25.40	2.10	0.037	0.165	4.20	G	G	N
LC 018C 14									1.250	31.75	1.70	0.030	0.198	5.04	G	G	N
LC 018C 15									1.500	38.10	1.40	0.024	0.232	5.88	G	G	N
LC 018C 16									1.750	44.45	1.20	0.021	0.259	6.59	G	G	N
LC 018C 17									2.000	50.80	1.00	0.018	0.304	7.72	G	G	N
LC 020C 01	.240	6.10	.250	6.35	.020	.51	2.000	.906	0.250	6.35	11.00	0.196	0.082	2.08	F	F	M
LC 020C 02									0.313	7.94	8.60	0.153	0.094	2.39	F	F	M
LC 020C 03									0.375	9.52	6.75	0.120	0.108	2.74	F	F	M
LC 020C 04									0.438	11.11	5.60	0.100	0.120	3.05	F	F	M
LC 020C 05									0.500	12.70	4.90	0.087	0.132	3.35	F	F	M
LC 020C 06									0.563	14.29	4.40	0.078	0.144	3.66	F	F	M
LC 020C 07									0.625	15.88	3.80	0.068	0.158	4.01	F	F	M
LC 020C 08									0.688	17.46	3.50	0.062	0.170	4.32	F	F	M
LC 020C 09									0.750	19.05	3.20	0.057	0.182	4.62	F	F	M
LC 020C 10									0.813	20.64	2.90	0.052	0.194	4.93	G	G	N
LC 020C 11									0.875	22.22	2.70	0.048	0.208	5.28	G	G	N
LC 020C 12									1.000	25.40	2.40	0.043	0.232	5.89	G	G	N
LC 020C 13									1.250	31.75	1.90	0.034	0.282	7.16	G	G	N
LC 020C 14									1.500	38.10	1.57	0.028	0.332	8.43	G	G	N
LC 020C 15									1.750	44.45	1.32	0.024	0.382	9.70	G	G	N
LC 020C 16									2.000	50.80	1.15	0.020	0.432	10.97	G	G	N
LC 022C 00	.240	6.10	.250	6.35	.022	.56	3.250	1.472	0.250	6.35	18.30	0.326	0.085	2.16	F	F	M
LC 022C 0									0.313	7.94	14.10	0.251	0.097	2.46	F	F	M
LC 022C 01									0.375	9.52	12.00	0.214	0.111	2.82	F	F	M
LC 022C 02									0.438	11.11	10.00	0.178	0.122	3.10	F	F	M
LC 022C 03									0.500	12.70	9.00	0.160	0.133	3.38	F	F	M
LC 022C 04									0.563	14.29	8.00	0.143	0.144	3.66	F	F	M
LC 022C 05									0.625	15.88	7.00	0.125	0.155	3.94	F	F	M
LC 022C 06									0.688	17.46	6.00	0.107	0.177	4.50	F	F	M
LC 022C 07									0.750	19.05	5.50	0.098	0.188	4.78	F	F	M
LC 022C 08									0.813	20.64	5.00	0.089	0.199	5.05	G	G	N
LC 022C 09									1.000	25.40	4.25	0.076	0.225	5.72	G	G	N
LC 022C 10									1.250	31.75	3.30	0.059	0.283	7.19	G	G	N
LC 022C 11									1.500	38.10	2.80	0.050	0.324	8.23	G	G	N
LC 022C 12									1.750	44.45	2.30	0.041	0.390	9.91	G	G	N
LC 022C 13									2.000	50.80	2.00	0.036	0.440	11.18	G	G	N

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 024C 01	.240	6.10	.250	6.35	.024	.61	4.250	1.925	0.375	9.52	17.00	0.303	0.130	3.30	F	F	M
LC 024C 02									0.438	11.11	14.50	0.258	0.144	3.66	F	F	M
LC 024C 03									0.500	12.70	12.25	0.218	0.158	4.01	F	F	M
LC 024C 04									0.563	14.29	11.00	0.196	0.172	4.37	F	F	M
LC 024C 05									0.625	15.88	9.75	0.174	0.185	4.70	F	F	M
LC 024C 06									0.688	17.46	9.00	0.160	0.199	5.05	F	F	M
LC 024C 07									0.750	19.05	8.00	0.143	0.213	5.41	F	F	M
LC 024C 08									0.813	20.64	7.30	0.130	0.226	5.74	G	G	N
LC 024C 09									0.875	22.22	6.60	0.118	0.240	6.10	G	G	N
LC 024C 10									1.000	25.40	5.90	0.105	0.268	6.81	G	G	N
LC 024C 11									1.250	31.75	4.60	0.082	0.322	8.18	G	G	N
LC 024C 12									1.500	38.10	3.75	0.067	0.380	9.65	G	G	N
LC 024C 13									1.750	44.45	3.30	0.059	0.432	10.97	G	G	N
LC 024C 14									2.000	50.80	2.80	0.050	0.485	12.32	G	G	N
LC 026C 0	.240	6.10	.250	6.35	.026	.61	5.250	1.925	0.313	7.92	27.80	0.496	0.128	3.25	F	F	M
LC 026C 01									0.375	9.52	24.00	0.428	0.131	3.33	F	F	M
LC 026C 02									0.438	11.11	20.00	0.357	0.151	3.84	F	F	M
LC 026C 03									0.500	12.70	17.00	0.303	0.164	4.16	F	F	M
LC 026C 04									0.563	14.29	14.00	0.250	0.183	4.65	F	F	M
LC 026C 05									0.625	15.88	12.50	0.223	0.203	5.16	F	F	M
LC 026C 06									0.688	17.46	11.00	0.196	0.222	5.64	F	F	M
LC 026C 07									0.750	19.05	10.00	0.178	0.235	5.97	F	F	M
LC 026C 08									0.813	20.64	9.00	0.160	0.260	6.60	G	G	N
LC 026C 09									0.875	22.22	8.00	0.143	0.287	7.29	G	G	N
LC 026C 10									1.000	25.40	7.40	0.132	0.300	7.62	G	G	N
LC 026C 11									1.250	31.75	5.90	0.105	0.367	9.32	G	G	N
LC 026C 12									1.500	38.10	4.90	0.087	0.421	10.69	G	G	N
LC 026C 13									1.750	44.45	4.20	0.075	0.483	12.27	G	G	N
LC 026C 14									2.000	50.80	3.65	0.065	0.545	13.84	G	G	N
LC 029C 01	.240	6.10	.250	6.35	.029	.74	7.000	3.170	0.375	9.52	33.50	0.597	0.170	4.32	F	F	M
LC 029C 02									0.438	11.11	27.60	0.492	0.190	4.83	F	F	M
LC 029C 03									0.500	12.70	23.70	0.422	0.210	5.33	F	F	M
LC 029C 04									0.563	14.29	20.60	0.367	0.230	5.84	F	F	M
LC 029C 05									0.625	15.88	18.50	0.330	0.249	6.32	F	F	M
LC 029C 06									0.688	17.46	16.80	0.300	0.268	6.81	F	F	M
LC 029C 07									0.750	19.05	15.70	0.280	0.288	7.32	F	F	M
LC 029C 08									0.813	20.64	14.00	0.250	0.310	7.87	G	G	N
LC 029C 09									0.875	22.22	12.90	0.230	0.329	8.36	G	G	N
LC 029C 10									1.000	25.40	11.30	0.201	0.367	9.32	G	G	N
LC 029C 11									1.250	31.75	8.85	0.158	0.447	11.35	G	G	N
LC 029C 12									1.500	38.10	7.35	0.131	0.526	13.36	G	G	N
LC 029C 13									1.750	44.45	6.25	0.111	0.607	15.42	G	G	N
LC 029C 14									2.000	50.80	5.45	0.097	0.690	17.53	G	G	N



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 032C 01	.240	6.10	.250	6.35	.032	.81	10.000	4.529	0.313	7.94	62.00	1.105	0.161	4.09	F	F	M
LC 032C 02									0.375	9.52	50.00	0.892	0.177	4.50	F	F	M
LC 032C 03									0.438	11.11	43.00	0.767	0.201	5.10	F	F	M
LC 032C 04									0.500	12.70	36.00	0.642	0.225	5.72	F	F	M
LC 032C 05									0.563	14.29	32.00	0.570	0.249	6.32	F	F	M
LC 032C 06									0.625	15.88	28.00	0.499	0.273	6.93	F	F	M
LC 032C 07									0.688	17.46	25.00	0.446	0.297	7.54	F	F	M
LC 032C 08									0.750	19.05	22.00	0.392	0.329	8.36	F	F	M
LC 032C 09									0.813	20.64	20.00	0.357	0.353	8.97	G	G	N
LC 032C 10									0.875	22.22	19.00	0.339	0.369	9.37	G	G	N
LC 032C 11									0.938	23.81	17.50	0.312	0.393	9.98	G	G	N
LC 032C 12									1.000	25.40	16.00	0.285	0.425	10.80	G	G	N
LC 032C 13									1.250	31.75	13.50	0.241	0.491	12.47	G	G	N
LC 032C 14									1.375	34.92	12.00	0.214	0.549	13.94	G	G	N
LC 032C 15									1.500	38.10	11.00	0.196	0.588	14.94	G	G	N
LC 032C 16									1.750	44.45	9.60	0.171	0.680	17.27	G	G	N
LC 032C 17									2.000	50.80	8.40	0.150	0.772	19.61	G	G	N
LC 035C 01	.240	6.10	.250	6.35	.035	.89	12.000	5.435	0.313	7.94	90.00	1.605	0.192	4.88	F	F	M
LC 035C 02									0.375	9.52	73.50	1.310	0.208	5.28	F	F	M
LC 035C 03									0.438	11.11	61.00	1.088	0.234	5.94	F	F	M
LC 035C 04									0.500	12.70	52.00	0.927	0.260	6.60	F	F	M
LC 035C 05									0.563	14.29	45.00	0.802	0.286	7.26	F	F	M
LC 035C 06									0.625	15.88	40.00	0.713	0.313	7.95	F	F	M
LC 035C 07									0.688	17.46	36.00	0.642	0.339	8.61	F	F	M
LC 035C 08									0.750	19.05	32.00	0.570	0.365	9.27	F	F	M
LC 035C 09									0.813	20.64	29.30	0.522	0.392	9.96	G	G	N
LC 035C 10									0.875	22.22	27.00	0.481	0.418	10.62	G	G	N
LC 035C 11									0.938	23.81	24.40	0.435	0.462	11.73	G	G	N
LC 035C 12									1.000	25.40	23.00	0.410	0.490	12.45	G	G	N
LC 035C 13									1.250	31.75	18.00	0.321	0.597	15.16	G	G	N
LC 035C 14									1.375	34.92	16.00	0.285	0.650	16.51	G	G	N
LC 035C 15									1.500	38.10	14.80	0.264	0.702	17.83	G	G	N
LC 035C 16									1.750	44.45	12.40	0.221	0.807	20.50	G	G	N
LC 035C 17									2.000	50.80	11.00	0.196	0.913	23.19	G	G	N
LC 035C 18									2.250	57.15	9.80	0.175	1.017	25.83	G	G	N
LC 035C 19									2.500	63.50	8.90	0.159	1.121	28.47	G	G	N

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 038C 01	.240	6.10	.250	6.35	.038	.96	16.000	7.246	0.313	7.94	127.00	2.264	0.191	4.85	F	F	M
LC 038C 02									0.375	9.52	101.00	1.801	0.219	5.56	F	F	M
LC 038C 03									0.438	11.11	84.00	1.498	0.248	6.30	F	F	M
LC 038C 04									0.500	12.70	72.00	1.284	0.286	7.26	F	F	M
LC 038C 05									0.563	14.29	64.00	1.141	0.305	7.75	F	F	M
LC 038C 06									0.625	15.88	57.00	1.016	0.334	8.48	F	F	M
LC 038C 07									0.688	17.46	51.00	0.909	0.362	9.19	F	F	M
LC 038C 08									0.750	19.05	46.00	0.820	0.390	9.91	F	F	M
LC 038C 09									0.813	20.64	42.00	0.749	0.419	10.64	G	G	N
LC 038C 10									0.875	22.22	38.00	0.678	0.457	11.61	G	G	N
LC 038C 11									0.938	23.81	35.00	0.624	0.496	12.60	G	G	N
LC 038C 12									1.000	25.40	33.00	0.588	0.524	13.31	G	G	N
LC 038C 13									1.125	28.58	29.00	0.517	0.581	14.76	G	G	N
LC 038C 14									1.250	31.75	26.00	0.464	0.647	16.43	G	G	N
LC 038C 15									1.375	34.92	23.00	0.410	0.715	18.16	G	G	N
LC 038C 16									1.500	38.10	21.00	0.374	0.772	19.61	G	G	N
LC 038C 17									1.750	44.45	18.00	0.321	0.879	22.33	G	G	N
LC 038C 18									2.000	50.80	16.00	0.285	0.994	25.25	G	G	N
LC 038C 19									2.250	57.15	14.20	0.253	1.140	28.96	G	G	N
LC 038C 20									2.500	63.50	12.60	0.225	1.240	31.50	G	G	N
LC 040C 01	.240	6.10	.250	6.35	.040	1.02	17.000	7.699	0.313	7.94	155.00	2.764	0.214	5.44	F	F	M
LC 040C 02									0.375	9.52	122.00	2.175	0.248	6.30	F	F	M
LC 040C 03									0.438	11.11	100.00	1.783	0.282	7.16	F	F	M
LC 040C 04									0.500	12.70	84.00	1.498	0.314	7.98	F	F	M
LC 040C 05									0.563	14.29	74.00	1.319	0.350	8.89	F	F	M
LC 040C 06									0.625	15.88	67.00	1.195	0.382	9.70	F	F	M
LC 040C 07									0.688	17.46	60.00	1.070	0.414	10.52	F	F	M
LC 040C 08									0.750	19.05	57.00	1.016	0.430	10.92	F	F	M
LC 040C 09									0.813	20.64	48.50	0.865	0.482	12.24	G	G	N
LC 040C 10									0.875	22.22	46.00	0.820	0.514	13.06	G	G	N
LC 040C 11									0.938	23.81	42.00	0.749	0.550	13.97	G	G	N
LC 040C 12									1.000	25.40	39.30	0.701	0.582	14.78	G	G	N
LC 040C 13									1.125	28.58	35.00	0.624	0.650	16.51	G	G	N
LC 040C 14									1.250	31.75	31.00	0.553	0.715	18.16	G	G	N
LC 040C 15									1.375	34.92	27.50	0.490	0.782	19.86	G	G	N
LC 040C 16									1.500	38.10	25.70	0.458	0.865	21.97	G	G	N
LC 040C 17									1.750	44.45	21.70	0.387	0.982	24.94	J	J	P
LC 040C 18									2.000	50.80	19.20	0.342	1.114	28.30	J	J	P
LC 040C 19									2.250	57.15	16.70	0.298	1.250	31.75	J	J	P
LC 040C 20									2.500	63.50	15.00	0.267	1.382	35.10	J	J	P



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 042C 01	.240	6.10	.250	6.35	.042	1.07	19.000	8.605	0.375	9.52	151.00	2.692	0.253	6.43	F	F	M
LC 042C 02									0.438	11.11	123.00	2.193	0.295	7.49	F	F	M
LC 042C 03									0.500	12.70	106.00	1.890	0.327	8.30	F	F	M
LC 042C 04									0.563	14.29	94.00	1.676	0.358	9.09	F	F	M
LC 042C 05									0.625	15.88	85.00	1.516	0.389	9.88	F	F	M
LC 042C 06									0.688	17.46	75.00	1.337	0.421	10.69	F	F	M
LC 042C 07									0.750	19.05	65.00	1.159	0.484	12.29	F	F	M
LC 042C 08									0.813	20.64	60.00	1.070	0.505	12.83	G	G	N
LC 042C 09									0.875	22.22	56.00	0.999	0.546	13.87	G	G	N
LC 042C 10									0.938	23.81	51.00	0.909	0.588	14.94	G	G	N
LC 042C 11									1.000	25.40	48.00	0.856	0.621	15.77	G	G	N
LC 042C 12									1.125	28.58	42.00	0.749	0.694	17.63	G	G	N
LC 042C 13									1.250	31.75	38.00	0.678	0.756	19.20	G	G	N
LC 042C 14									1.375	34.92	34.00	0.606	0.841	21.36	G	G	N
LC 042C 15									1.500	38.10	31.00	0.553	0.905	22.99	G	G	N
LC 042C 16									1.750	44.45	26.50	0.472	1.050	25.83	J	J	P
LC 042C 17									2.000	50.80	23.00	0.410	1.196	30.05	J	J	P
LC 042C 18									2.250	57.15	20.50	0.366	1.340	33.22	J	J	P
LC 042C 19									2.500	63.50	17.80	0.317	1.513	36.20	J	J	P
LC 045C 01	.240	6.10	.250	6.35	.045	1.14	24.000	10.890	0.375	9.53	215.20	3.843	0.271	6.89	F	F	M
LC 045C 02									0.438	11.13	176.20	3.147	0.311	7.90	F	F	M
LC 045C 03									0.500	12.70	149.60	2.671	0.350	8.88	F	F	M
LC 045C 04									0.562	14.27	129.90	2.320	0.389	9.87	F	F	M
LC 045C 05									0.625	15.88	114.60	2.047	0.428	10.87	F	F	M
LC 045C 06									0.687	17.45	102.70	1.835	0.467	11.86	F	F	M
LC 045C 07									0.750	19.05	92.90	1.659	0.506	12.86	F	F	M
LC 045C 08									0.812	20.62	84.90	1.517	0.545	13.85	G	G	N
LC 045C 09									0.875	22.23	78.10	1.395	0.585	14.86	G	G	N
LC 045C 10									0.937	23.80	72.40	1.293	0.624	15.84	G	G	N
LC 045C 11									1.000	25.40	67.40	1.204	0.663	16.85	G	G	N
LC 045C 12									1.125	28.58	59.30	1.058	0.742	18.84	G	G	N
LC 045C 13									1.250	31.75	52.90	0.944	0.820	20.83	G	G	N
LC 045C 14									1.500	38.10	43.50	0.777	0.977	24.81	G	G	N
LC 045C 15									1.750	44.45	36.90	0.660	1.133	28.79	J	J	P
LC 045C 16									2.000	50.80	32.10	0.573	1.290	32.77	J	J	P
LC 045C 17									2.250	57.15	28.40	0.507	1.447	36.75	J	J	P
LC 045C 18									2.500	63.50	25.40	0.454	1.604	40.73	J	J	P

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 020CD 01	.250	6.35	.266	6.75	.020	.51	2.137	.969	0.250	6.35	12.18	0.217	0.075	1.89	F	F	M
LC 020CD 02									0.313	7.95	9.37	0.167	0.085	2.15	F	F	M
LC 020CD 03									0.375	9.53	7.63	0.136	0.094	2.40	F	F	M
LC 020CD 04									0.438	11.13	6.43	0.115	0.104	2.65	F	F	M
LC 020CD 05									0.500	12.70	5.56	0.099	0.114	2.90	F	F	M
LC 020CD 06									0.563	14.30	4.89	0.087	0.124	3.16	F	F	M
LC 020CD 07									0.625	15.88	4.37	0.078	0.134	3.41	F	F	M
LC 020CD 08									0.688	17.48	3.95	0.070	0.144	3.66	F	F	M
LC 020CD 09									0.750	19.05	3.60	0.064	0.154	3.91	F	F	M
LC 020CD 10									0.813	20.65	3.31	0.059	0.164	4.17	G	G	N
LC 020CD 11									0.875	22.23	3.06	0.055	0.174	4.42	G	G	N
LC 020CD 12									1.000	25.40	2.66	0.048	0.194	4.92	G	G	N
LC 020CD 13									1.250	31.75	2.11	0.038	0.233	5.93	G	G	N
LC 020CD 14									1.375	34.93	1.89	0.034	0.255	6.47	G	G	N
LC 020CD 15									1.500	38.10	1.74	0.031	0.275	6.98	G	G	N
LC 020CD 16									1.750	44.45	1.48	0.027	0.315	8.00	G	G	N
LC 020CD 17									2.000	50.80	1.30	0.023	0.355	9.02	G	G	N
LC 026CD 01	.250	6.35	.266	6.75	.026	.66	5.964	2.705	0.375	9.53	23.63	0.422	0.123	3.12	F	F	M
LC 026CD 02									0.438	11.13	19.78	0.353	0.136	3.46	F	F	M
LC 026CD 03									0.500	12.70	17.04	0.304	0.149	3.80	F	F	M
LC 026CD 04									0.563	14.30	14.86	0.265	0.163	4.15	F	F	M
LC 026CD 05									0.625	15.88	13.18	0.235	0.177	4.51	F	F	M
LC 026CD 06									0.688	17.48	11.81	0.211	0.192	4.87	F	F	M
LC 026CD 07									0.750	19.05	10.70	0.191	0.206	5.24	F	F	M
LC 026CD 08									0.813	20.65	9.76	0.174	0.221	5.61	G	G	N
LC 026CD 09									0.875	22.23	8.98	0.160	0.235	5.98	G	G	N
LC 026CD 10									0.938	23.83	8.29	0.148	0.251	6.36	G	G	N
LC 026CD 11									1.000	25.40	7.40	0.132	0.269	6.84	G	G	N
LC 026CD 12									1.250	31.75	6.37	0.114	0.310	7.87	G	G	N
LC 026CD 13									1.500	38.10	5.27	0.094	0.363	9.23	G	G	N
LC 026CD 14									1.750	44.45	4.50	0.080	0.417	10.59	G	G	N
LC 026CD 15									2.000	50.80	3.92	0.070	0.470	11.94	G	G	N



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 035CD 01	.250	6.35	.266	6.75	.035	.89	9.915	4.497	0.313	7.95	75.05	1.340	0.181	4.60	F	F	M
LC 035CD 02									0.375	9.53	59.80	1.068	0.209	5.30	F	F	M
LC 035CD 03									0.438	11.13	49.56	0.885	0.237	6.02	F	F	M
LC 035CD 04									0.500	12.70	42.41	0.757	0.265	6.72	F	F	M
LC 035CD 05									0.563	14.30	36.99	0.661	0.293	7.44	F	F	M
LC 035CD 06									0.625	15.88	32.86	0.587	0.321	8.14	F	F	M
LC 035CD 07									0.688	17.48	29.51	0.527	0.349	8.86	F	F	M
LC 035CD 08									0.750	19.05	26.82	0.479	0.377	9.56	F	F	M
LC 035CD 09									0.813	20.65	24.55	0.438	0.405	10.28	G	G	N
LC 035CD 10									0.875	22.23	22.66	0.405	0.432	10.99	G	G	N
LC 035CD 11									0.938	23.83	21.01	0.375	0.461	11.70	G	G	N
LC 035CD 12									1.000	25.40	19.61	0.350	0.488	12.41	G	G	N
LC 035CD 13									1.250	31.75	15.46	0.276	0.600	15.25	G	G	N
LC 035CD 14									1.375	34.93	13.98	0.250	0.656	16.67	G	G	N
LC 035CD 15									1.500	38.10	12.75	0.228	0.712	18.09	G	G	N
LC 035CD 16									1.750	44.45	10.86	0.194	0.824	20.94	G	G	N
LC 035CD 17									2.000	50.80	9.45	0.169	0.936	23.78	G	G	N
LC 035CD 18									2.250	57.15	8.37	0.149	1.048	26.62	G	G	N
LC 035CD 19									2.500	63.50	7.51	0.134	1.160	29.46	G	G	N
LC 028CE 01	.281	7.14	.313	7.95	.028	0.71	4.046	1.835	0.250	6.35	29.55	0.529	0.113	2.87	F	F	M
LC 028CE 02									0.313	7.95	22.31	0.399	0.131	3.33	F	F	M
LC 028CE 03									0.375	9.53	17.97	0.322	0.149	3.78	F	F	M
LC 028CE 04									0.438	11.13	15.01	0.269	0.167	4.24	F	F	M
LC 028CE 05									0.500	12.70	12.91	0.231	0.184	4.67	F	F	M
LC 028CE 06									0.563	14.30	11.31	0.202	0.202	5.13	F	F	M
LC 028CE 07									0.625	15.88	10.08	0.180	0.220	5.59	F	F	M
LC 028CE 08									0.750	19.05	8.26	0.148	0.256	6.50	F	F	M
LC 028CE 09									0.875	22.23	7.00	0.125	0.292	7.42	F	F	M
LC 028CE 10									1.000	25.40	6.07	0.109	0.327	8.31	F	F	M
LC 028CE 11									1.250	31.75	4.80	0.086	0.399	10.13	F	F	M
LC 028CE 12									1.375	38.10	4.35	0.078	0.434	11.02	F	F	M
LC 028CE 13									1.500	34.93	3.97	0.071	0.470	11.94	F	F	M
LC 022D 00	.300	7.62	.313	7.94	.022	.56	2.500	1.132	0.375	9.52	8.20	0.146	0.088	2.24	F	F	M
LC 022D 01									0.438	11.11	6.80	0.121	0.097	2.46	F	F	M
LC 022D 02									0.500	12.70	6.50	0.116	0.106	2.69	F	F	M
LC 022D 03									0.563	14.29	6.00	0.107	0.111	2.82	F	F	M
LC 022D 04									0.625	15.88	5.00	0.089	0.122	3.10	F	F	M
LC 022D 05									0.688	17.46	4.50	0.080	0.128	3.25	F	F	M
LC 022D 06									0.750	19.05	4.00	0.071	0.133	3.38	F	F	M
LC 022D 07									0.813	20.64	3.50	0.062	0.155	3.94	F	F	M
LC 022D 08									0.875	22.22	3.00	0.053	0.166	4.22	F	F	M
LC 022D 09									1.000	25.40	2.80	0.050	0.181	4.60	F	F	M
LC 022D 10									1.250	31.75	2.30	0.041	0.207	5.26	F	F	M
LC 022D 11									1.500	38.10	2.00	0.036	0.228	5.79	F	F	M
LC 022D 12									1.750	44.45	1.65	0.029	0.269	6.83	G	G	N
LC 022D 13									2.000	50.80	1.40	0.025	0.313	7.95	G	G	N
LC 022D 14									2.250	57.15	1.21	0.022	0.357	9.06	G	G	N
									2.500	63.50	1.07	0.019	0.391	9.93	G	G	N

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 026D 01	.300	7.62	.313	7.94	.026	.66	4.250	1.925	0.438	11.11	13.00	0.232	0.118	3.00	F	F	M
LC 026D 02									0.500	12.70	11.50	0.205	0.131	3.33	F	F	M
LC 026D 03									0.563	14.29	10.00	0.178	0.144	3.66	F	F	M
LC 026D 04									0.625	15.88	9.00	0.160	0.151	3.84	F	F	M
LC 026D 05									0.688	17.46	8.00	0.143	0.164	4.16	F	F	M
LC 026D 06									0.750	19.05	7.50	0.134	0.170	4.32	F	F	M
LC 026D 07									0.813	20.64	7.00	0.125	0.183	4.65	F	F	M
LC 026D 08									0.875	22.22	6.00	0.107	0.206	5.23	F	F	M
LC 026D 09									0.938	23.81	5.50	0.098	0.209	5.31	F	F	M
LC 026D 10									1.000	25.40	5.00	0.089	0.229	5.82	F	F	M
LC 026D 11									1.250	31.75	4.30	0.077	0.255	6.48	F	F	M
LC 026D 12									1.500	38.10	3.50	0.062	0.301	7.64	F	F	M
LC 026D 13									1.750	44.45	3.00	0.053	0.343	8.71	F	F	M
LC 026D 14									2.000	50.80	2.60	0.046	0.384	9.75	F	F	M
LC 026D 15									2.250	57.15	2.31	0.041	0.436	11.07	G	G	N
LC 026D 16									2.500	63.50	2.08	0.037	0.479	12.16	G	G	N
LC 030D 01	.300	7.62	.313	7.94	.030	.76	6.000	2.717	0.438	11.11	20.00	0.357	0.153	3.89	F	F	M
LC 030D 02									0.500	12.70	17.00	0.303	0.168	4.27	F	F	M
LC 030D 03									0.563	14.29	15.00	0.267	0.183	4.65	F	F	M
LC 030D 04									0.625	15.88	13.30	0.237	0.198	5.03	F	F	M
LC 030D 05									0.688	17.46	12.00	0.214	0.213	5.41	F	F	M
LC 030D 06									0.750	19.05	11.00	0.196	0.231	5.87	F	F	M
LC 030D 07									0.813	20.64	10.00	0.178	0.246	6.25	F	F	M
LC 030D 08									0.875	22.22	9.30	0.166	0.261	6.63	F	F	M
LC 030D 09									0.938	23.81	8.60	0.153	0.276	7.01	F	F	M
LC 030D 10									1.000	25.40	8.00	0.143	0.291	7.39	F	F	M
LC 030D 11									1.250	31.75	6.30	0.112	0.353	8.97	G	G	N
LC 030D 12									1.500	38.10	5.20	0.093	0.414	10.52	G	G	N
LC 030D 13									1.750	44.45	4.50	0.080	0.474	12.04	G	G	N
LC 030D 14									2.000	50.80	3.80	0.068	0.537	13.64	G	G	N
LC 030D 15									2.250	57.15	3.44	0.061	0.608	15.44	G	G	N
LC 030D 16									2.500	63.50	3.08	0.055	0.670	17.02	G	G	N
LC 032D 01	.300	7.62	.313	7.94	.032	.81	7.500	3.397	0.438	11.11	27.00	0.481	0.169	4.29	F	F	M
LC 032D 02									0.500	12.70	23.00	0.410	0.185	4.70	F	F	M
LC 032D 03									0.563	14.29	20.00	0.357	0.201	5.10	F	F	M
LC 032D 04									0.625	15.88	18.00	0.321	0.217	5.51	F	F	M
LC 032D 05									0.688	17.46	16.00	0.285	0.241	6.12	F	F	M
LC 032D 06									0.750	19.05	15.00	0.267	0.249	6.32	F	F	M
LC 032D 07									0.813	20.64	13.50	0.241	0.265	6.73	F	F	M
LC 032D 08									0.875	22.22	12.00	0.214	0.289	7.34	F	F	M
LC 032D 09									0.938	23.81	11.00	0.196	0.313	7.95	F	F	M
LC 032D 10									1.000	25.40	10.00	0.178	0.337	8.56	F	F	M
LC 032D 11									1.250	31.75	8.60	0.153	0.383	9.73	F	F	M
LC 032D 12									1.500	38.10	7.00	0.125	0.450	11.43	F	F	M
LC 032D 13									1.750	44.45	6.00	0.107	0.518	13.16	F	F	M
LC 032D 14									2.000	50.80	5.30	0.094	0.572	14.53	F	F	M
LC 032D 15									2.250	57.15	4.70	0.084	0.635	16.13	G	G	N
LC 032D 16									2.500	63.50	4.10	0.073	0.700	17.78	G	G	N



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 035D 01	.300	7.62	.313	7.94	.035	.89	9.750	4.420	0.375	9.53	45.80	0.819	0.167	4.25	F	F	M
LC 035D 02									0.438	11.13	38.00	0.679	0.187	4.75	F	F	M
LC 035D 03									0.500	12.70	32.50	0.581	0.206	5.24	F	F	M
LC 035D 04									0.562	14.27	28.40	0.508	0.226	5.73	F	F	M
LC 035D 05									0.625	15.88	25.20	0.450	0.245	6.23	F	F	M
LC 035D 06									0.687	17.45	22.70	0.405	0.265	6.72	F	F	M
LC 035D 07									0.750	19.05	20.60	0.367	0.284	7.22	F	F	M
LC 035D 08									0.812	20.62	18.80	0.337	0.303	7.71	F	F	M
LC 035D 09									0.875	22.23	17.40	0.310	0.323	8.21	F	F	M
LC 035D 10									0.937	23.80	16.10	0.288	0.342	8.70	F	F	M
LC 035D 11									1.000	25.40	15.00	0.268	0.362	9.20	F	F	M
LC 035D 12									1.125	28.58	13.30	0.237	0.401	10.19	F	F	M
LC 035D 13									1.250	31.75	11.80	0.212	0.440	11.18	F	F	M
LC 035D 14									1.375	34.93	10.70	0.191	0.479	12.17	F	F	M
LC 035D 15									1.500	38.10	9.80	0.175	0.518	13.16	F	F	M
LC 035D 16									1.750	44.45	8.30	0.149	0.596	15.14	G	G	N
LC 035D 17									2.000	50.80	7.20	0.129	0.674	17.12	G	G	N
LC 035D 18									2.250	57.15	6.40	0.115	0.752	19.10	G	G	N
LC 035D 19									2.500	63.50	5.80	0.103	0.830	21.08	G	G	N
LC 038D 01	.300	7.62	.313	7.94	.038	.96	12.250	5.548	0.375	9.52	64.00	1.141	0.182	4.62	F	F	M
LC 038D 02									0.438	11.11	53.00	0.945	0.201	5.10	F	F	M
LC 038D 03									0.500	12.70	46.00	0.820	0.219	5.56	F	F	M
LC 038D 04									0.563	14.29	39.00	0.695	0.248	6.30	F	F	M
LC 038D 05									0.625	15.88	35.00	0.624	0.267	6.78	F	F	M
LC 038D 06									0.688	17.46	30.00	0.535	0.296	7.52	F	F	M
LC 038D 07									0.750	19.05	28.00	0.499	0.315	8.00	F	F	M
LC 038D 08									0.813	20.64	26.00	0.464	0.334	8.48	F	F	M
LC 038D 09									0.875	22.22	23.00	0.410	0.372	9.45	F	F	M
LC 038D 10									0.938	23.81	22.00	0.392	0.381	9.68	F	F	M
LC 038D 11									1.000	25.40	21.00	0.374	0.400	10.16	F	F	M
LC 038D 12									1.125	28.58	19.00	0.339	0.428	10.87	F	F	M
LC 038D 13									1.250	31.75	16.00	0.285	0.495	12.57	F	F	M
LC 038D 14									1.375	34.92	15.00	0.267	0.533	13.54	F	F	M
LC 038D 15									1.500	38.10	13.50	0.241	0.571	14.50	F	F	M
LC 038D 16									1.750	44.45	11.25	0.200	0.662	16.81	G	G	N
LC 038D 17									2.000	50.80	9.50	0.169	0.772	19.61	G	G	N
LC 038D 18									2.250	57.15	8.60	0.154	0.858	21.79	G	G	N
LC 038D 19									2.500	63.50	7.70	0.138	0.944	23.98	G	G	N

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 040D 01	.300	7.62	.313	7.94	.040	1.02	14.500	6.567	0.375	9.52	80.00	1.426	0.195	4.95	F	F	M
LC 040D 02									0.438	11.11	68.00	1.212	0.218	5.54	F	F	M
LC 040D 03									0.500	12.70	57.00	1.016	0.242	6.15	F	F	M
LC 040D 04									0.563	14.29	49.00	0.874	0.262	6.65	F	F	M
LC 040D 05									0.625	15.88	44.00	0.784	0.290	7.37	F	F	M
LC 040D 06									0.688	17.46	39.00	0.695	0.314	7.98	F	F	M
LC 040D 07									0.750	19.05	35.00	0.624	0.342	8.69	F	F	M
LC 040D 08									0.813	20.64	32.00	0.570	0.366	9.30	F	F	M
LC 040D 09									0.875	22.22	30.00	0.535	0.394	10.01	F	F	M
LC 040D 10									0.938	23.81	28.00	0.499	0.400	10.16	F	F	M
LC 040D 11									1.000	25.40	26.00	0.464	0.430	10.92	F	F	M
LC 040D 12									1.125	28.58	23.00	0.410	0.474	12.04	F	F	M
LC 040D 13									1.250	31.75	20.00	0.357	0.512	13.00	F	F	M
LC 040D 14									1.375	34.92	18.00	0.321	0.550	13.97	F	F	M
LC 040D 15									1.500	38.10	16.00	0.285	0.650	16.51	F	F	M
LC 040D 16									1.750	44.45	14.00	0.250	0.718	18.24	G	G	N
LC 040D 17									2.000	50.80	12.00	0.214	0.810	20.57	G	G	N
LC 040D 18									2.250	57.15	10.70	0.191	0.907	23.04	G	G	N
LC 040D 19									2.500	63.50	9.60	0.171	1.000	25.40	G	G	N
LC 042D 01	.300	7.62	.313	7.94	.042	1.07	16.250	7.370	0.375	9.52	105.00	1.872	0.201	5.10	F	F	M
LC 042D 02									0.438	11.11	88.00	1.569	0.222	5.64	F	F	M
LC 042D 03									0.500	12.70	70.00	1.248	0.253	6.43	F	F	M
LC 042D 04									0.563	14.29	60.00	1.070	0.285	7.24	F	F	M
LC 042D 05									0.625	15.88	52.00	0.927	0.316	8.03	F	F	M
LC 042D 06									0.688	17.46	46.00	0.820	0.337	8.56	F	F	M
LC 042D 07									0.750	19.05	42.00	0.749	0.358	9.09	F	F	M
LC 042D 08									0.813	20.64	38.00	0.678	0.390	9.91	F	F	M
LC 042D 09									0.875	22.22	34.00	0.606	0.421	10.69	F	F	M
LC 042D 10									0.938	23.81	32.00	0.570	0.452	11.48	F	F	M
LC 042D 11									1.000	25.40	30.00	0.535	0.474	12.04	F	F	M
LC 042D 12									1.125	28.58	28.00	0.499	0.506	12.85	F	F	M
LC 042D 13									1.250	31.75	24.00	0.428	0.579	14.71	F	F	M
LC 042D 14									1.375	34.92	22.00	0.392	0.631	16.03	F	F	M
LC 042D 15									1.500	38.10	20.00	0.357	0.673	17.09	F	F	M
LC 042D 16									1.750	44.45	16.50	0.294	0.786	19.96	G	G	N
LC 042D 17									2.000	50.80	14.50	0.258	0.884	22.45	G	G	N
LC 042D 18									2.250	57.15	13.00	0.232	0.995	25.27	G	G	N
LC 042D 19									2.500	63.50	11.60	0.207	1.079	27.41	G	G	N



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 045D 01	.300	7.62	.313	7.94	.045	1.14	19.750	8.945	0.375	9.52	124.00	2.211	0.226	5.74	F	F	M
LC 045D 02									0.438	11.11	103.00	1.836	0.260	6.60	F	F	M
LC 045D 03									0.500	12.70	90.00	1.605	0.271	6.88	F	F	M
LC 045D 04									0.563	14.29	77.00	1.373	0.316	8.03	F	F	M
LC 045D 05									0.625	15.88	69.00	1.230	0.339	8.61	F	F	M
LC 045D 06									0.688	17.46	61.00	1.088	0.372	9.45	F	F	M
LC 045D 07									0.750	19.05	55.00	0.981	0.406	10.31	F	F	M
LC 045D 08									0.813	20.64	51.00	0.909	0.417	10.59	F	F	M
LC 045D 09									0.875	22.22	46.00	0.820	0.451	11.46	F	F	M
LC 045D 10									0.938	23.81	42.00	0.749	0.496	12.60	F	F	M
LC 045D 11									1.000	25.40	40.00	0.713	0.518	13.16	F	F	M
LC 045D 12									1.125	28.58	36.00	0.642	0.564	14.32	F	F	M
LC 045D 13									1.250	31.75	32.00	0.570	0.631	16.03	F	F	M
LC 045D 14									1.375	34.92	29.00	0.517	0.664	16.86	F	F	M
LC 045D 15									1.500	38.10	26.00	0.464	0.743	18.87	F	F	M
LC 045D 16									1.750	44.45	22.00	0.392	0.860	21.84	G	G	N
LC 045D 17									2.000	50.80	19.00	0.339	0.960	24.38	G	G	N
LC 045D 18									2.250	57.15	17.00	0.303	1.080	27.43	G	G	N
LC 045D 19									2.500	63.50	15.30	0.273	1.191	30.25	G	G	N
LC 047D 01	.300	7.62	.313	7.94	.047	1.19	24.250	11.000	0.375	9.53	159.10	2.842	0.234	5.95	F	F	M
LC 047D 02									0.438	11.13	132.20	2.362	0.262	6.66	F	F	M
LC 047D 03									0.500	12.70	112.00	2.001	0.292	7.42	F	F	M
LC 047D 04									0.562	14.27	97.20	1.736	0.322	8.18	F	F	M
LC 047D 05									0.625	15.88	85.70	1.530	0.352	8.95	F	F	M
LC 047D 06									0.687	17.45	76.70	1.370	0.382	9.70	F	F	M
LC 047D 07									0.750	19.05	69.30	1.238	0.412	10.47	F	F	M
LC 047D 08									0.812	20.62	63.40	1.131	0.442	11.23	F	F	M
LC 047D 09									0.875	22.23	58.20	1.040	0.472	12.00	F	F	M
LC 047D 10									0.937	23.80	54.00	0.964	0.502	12.76	F	F	M
LC 047D 11									1.000	25.40	50.20	0.897	0.533	13.53	F	F	M
LC 047D 12									1.125	28.58	44.10	0.788	0.593	15.05	G	G	N
LC 047D 13									1.250	31.75	39.40	0.703	0.653	16.58	G	G	N
LC 047D 14									1.375	34.93	35.50	0.634	0.713	18.11	G	G	N
LC 047D 15									1.500	38.10	32.40	0.578	0.773	19.64	G	G	N
LC 047D 16									1.750	44.45	27.50	0.491	0.893	22.69	G	G	N
LC 047D 17									2.000	50.80	23.90	0.426	1.014	25.74	G	G	N
LC 047D 18									2.250	57.15	21.10	0.377	1.134	28.80	G	G	N
LC 047D 19									2.500	63.50	18.90	0.338	1.254	31.85	G	G	N
LC 047D 20									2.750	69.85	17.10	0.305	1.376	34.96	G	G	N
LC 047D 21									3.000	76.20	15.70	0.280	1.490	37.86	G	G	N

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 049D 01	.300	7.62	.313	7.94	.049	1.24	26.790	12.150	0.375	9.53	193.46	3.455	0.244	6.19	F	F	M
LC 049D 02									0.438	11.13	157.62	2.815	0.276	7.01	F	F	M
LC 049D 03									0.500	12.70	133.31	2.381	0.308	7.82	F	F	M
LC 049D 04									0.562	14.27	115.49	2.063	0.340	8.63	F	F	M
LC 049D 05									0.625	15.88	101.69	1.816	0.372	9.46	F	F	M
LC 049D 06									0.687	17.45	90.98	1.625	0.404	10.27	F	F	M
LC 049D 07									0.750	19.05	82.19	1.468	0.437	11.09	G	G	N
LC 049D 08									0.812	20.62	75.06	1.340	0.469	11.90	G	G	N
LC 049D 09									0.875	22.23	68.97	1.232	0.501	12.73	G	G	N
LC 049D 10									0.937	23.80	63.87	1.141	0.533	13.54	G	G	N
LC 049D 11									1.000	25.40	59.41	1.061	0.565	14.36	G	G	N
LC 049D 12									1.125	28.58	52.18	0.932	0.630	16.00	G	G	N
LC 049D 13									1.250	31.75	46.52	0.831	0.694	17.63	G	G	N
LC 049D 14									1.375	34.93	41.97	0.749	0.759	19.27	G	G	N
LC 049D 15									1.500	38.10	38.22	0.683	0.823	20.90	G	G	N
LC 049D 16									1.750	44.45	32.44	0.579	0.952	24.17	J	J	P
LC 049D 17									2.000	50.80	28.18	0.503	1.080	27.44	J	J	P
LC 049D 18									2.250	57.15	24.90	0.445	1.209	30.71	J	J	P
LC 049D 19									2.500	63.50	22.31	0.398	1.338	33.98	J	J	P
LC 049D 20									2.750	69.85	20.20	0.361	1.467	37.27	J	J	P
LC 049D 21									3.000	76.20	18.40	0.329	1.601	40.66	K	L	S
LC 051D 01	.300	7.62	.313	7.94	.051	1.30	29.250	13.270	0.375	9.53	229.90	4.106	0.255	6.48	F	F	M
LC 051D 02									0.438	11.13	186.80	3.336	0.290	7.36	F	F	M
LC 051D 03									0.500	12.70	157.70	2.817	0.324	8.23	F	F	M
LC 051D 04									0.562	14.27	136.50	2.437	0.358	9.10	F	F	M
LC 051D 05									0.625	15.88	120.00	2.143	0.393	9.98	F	F	M
LC 051D 06									0.687	17.45	107.30	1.916	0.427	10.84	F	F	M
LC 051D 07									0.750	19.05	96.90	1.730	0.461	11.72	G	G	N
LC 051D 08									0.812	20.62	88.40	1.579	0.496	12.59	G	G	N
LC 051D 09									0.875	22.23	81.20	1.450	0.530	13.47	G	G	N
LC 051D 10									0.937	23.80	75.20	1.343	0.564	14.33	G	G	N
LC 051D 11									1.000	25.40	69.90	1.248	0.599	15.21	G	G	N
LC 051D 12									1.125	28.58	61.40	1.096	0.668	16.96	G	G	N
LC 051D 13									1.250	31.75	54.70	0.976	0.737	18.71	G	G	N
LC 051D 14									1.375	34.93	49.30	0.881	0.805	20.45	G	G	N
LC 051D 15									1.500	38.10	44.90	0.802	0.874	22.20	G	G	N
LC 051D 16									1.750	44.45	38.10	0.680	1.012	25.69	J	J	P
LC 051D 17									2.000	50.80	33.10	0.591	1.149	29.19	J	J	P
LC 051D 18									2.250	57.15	29.20	0.522	1.287	32.68	J	J	P
LC 051D 19									2.500	63.50	26.20	0.467	1.424	36.17	J	J	P



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 016DE 01	.312	7.92	.328	8.33	.016	.41	.553	.251	0.250	6.35	2.84	0.051	0.055	1.40	F	F	M
LC 016DE 02									0.312	7.92	2.21	0.039	0.061	1.56	F	G	N
LC 016DE 03									0.375	9.53	1.80	0.032	0.068	1.72	F	G	N
LC 016DE 04									0.438	11.13	1.52	0.027	0.074	1.88	F	G	N
LC 016DE 05									0.500	12.70	1.32	0.024	0.080	2.04	F	G	N
LC 016DE 06									0.562	14.27	1.17	0.021	0.086	2.20	F	G	N
LC 016DE 07									0.625	15.88	1.04	0.019	0.093	2.36	F	G	N
LC 016DE 08									0.687	17.45	0.94	0.017	0.099	2.52	F	G	N
LC 016DE 09									0.750	19.05	0.86	0.015	0.105	2.68	F	G	N
LC 016DE 10									0.812	20.62	0.79	0.014	0.112	2.84	F	G	N
LC 016DE 11									0.875	22.23	0.73	0.013	0.118	3.00	F	G	N
LC 016DE 12									0.937	23.80	0.68	0.012	0.124	3.16	F	G	N
LC 016DE 13									1.000	25.40	0.64	0.011	0.131	3.32	F	G	N
LC 016DE 14									1.250	31.75	0.51	0.009	0.156	3.96	J	J	P
LC 016DE 15									1.500	38.10	0.42	0.008	0.181	4.60	K	K	R
LC 016DE 16									1.750	44.45	0.36	0.006	0.206	5.25	K	K	R
LC 016DE 17									2.000	50.80	0.31	0.006	0.232	5.89	K	K	R
LC 023DE 01	.312	7.92	.328	8.33	.023	.58	1.195	.542	0.375	9.53	4.91	0.088	0.131	3.34	F	F	M
LC 023DE 02									0.438	11.13	4.12	0.074	0.147	3.75	F	F	M
LC 023DE 03									0.500	12.70	3.55	0.063	0.163	4.15	F	F	M
LC 023DE 04									0.563	14.30	3.12	0.056	0.179	4.56	F	F	M
LC 023DE 05									0.625	15.88	2.79	0.050	0.195	4.96	F	F	M
LC 023DE 06									0.688	17.48	2.51	0.045	0.211	5.37	F	F	M
LC 023DE 07									0.750	19.05	2.29	0.041	0.227	5.77	F	F	M
LC 023DE 08									0.813	20.65	2.10	0.038	0.243	6.18	F	F	M
LC 023DE 09									0.875	22.23	1.95	0.035	0.259	6.58	F	F	M
LC 023DE 10									0.938	23.83	1.81	0.032	0.275	6.99	F	F	M
LC 023DE 11									1.000	25.40	1.69	0.030	0.291	7.39	F	F	M
LC 023DE 12									1.250	31.75	1.34	0.024	0.355	9.01	F	F	M
LC 023DE 13									1.375	34.93	1.21	0.022	0.387	9.82	F	F	M
LC 023DE 14									1.500	38.10	1.11	0.020	0.419	10.63	F	F	M
LC 023DE 15									1.750	44.45	0.95	0.017	0.482	12.25	G	G	N
LC 023DE 16									2.000	50.80	0.83	0.015	0.546	13.87	G	G	N
LC 023DE 17									2.250	57.15	0.73	0.013	0.610	15.49	G	G	N
LC 023DE 18									2.500	63.50	0.66	0.012	0.674	17.11	G	G	N

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 026DE 01	.312	7.92	.328	8.33	.026	.66	2.417	1.096	0.438	11.13	8.33	0.149	0.148	3.75	F	F	M
LC 026DE 02									0.500	12.70	7.18	0.128	0.163	4.14	F	F	M
LC 026DE 03									0.563	14.30	6.29	0.112	0.178	4.53	F	F	M
LC 026DE 04									0.625	15.88	5.61	0.100	0.193	4.91	F	F	M
LC 026DE 05									0.688	17.48	5.05	0.09	0.209	5.30	F	F	M
LC 026DE 06									0.750	19.05	4.61	0.082	0.224	5.69	F	F	M
LC 026DE 07									0.813	20.65	4.22	0.075	0.239	6.08	F	F	M
LC 026DE 08									0.875	22.23	3.91	0.070	0.254	6.46	F	F	M
LC 026DE 09									0.938	23.83	3.63	0.065	0.270	6.85	F	F	M
LC 026DE 10									1.000	25.40	3.39	0.061	0.285	7.24	F	F	M
LC 026DE 11									1.250	31.75	2.68	0.048	0.346	8.79	F	F	M
LC 026DE 12									1.500	38.10	2.22	0.040	0.407	10.34	F	F	M
LC 026DE 13									1.750	44.45	1.89	0.034	0.468	11.89	F	F	M
LC 026DE 14									2.000	50.80	1.65	0.029	0.529	13.44	F	F	M
LC 026DE 15									2.250	57.15	1.46	0.026	0.590	14.99	G	G	N
LC 026DE 16									2.500	63.50	1.31	0.023	0.651	16.54	G	G	N
LC 047DE 01	.312	7.92	.328	8.74	.047	1.19	13.282	6.025	0.375	9.53	116.19	2.080	0.261	6.63	F	F	M
LC 047DE 02									0.438	11.13	94.91	1.699	0.297	7.54	F	F	M
LC 047DE 03									0.500	12.70	80.42	1.439	0.334	8.48	F	F	M
LC 047DE 04									0.562	14.27	69.76	1.249	0.370	9.40	F	F	M
LC 047DE 05									0.625	15.88	61.49	1.101	0.406	10.31	F	F	M
LC 047DE 06									0.687	17.45	55.06	0.986	0.443	11.25	F	F	M
LC 047DE 07									0.750	19.05	49.77	0.891	0.479	12.17	F	F	M
LC 047DE 08									0.812	20.62	45.47	0.814	0.516	13.11	F	F	M
LC 047DE 09									0.875	22.23	41.81	0.748	0.552	14.02	F	F	M
LC 047DE 10									0.937	23.80	38.73	0.693	0.588	14.94	F	F	M
LC 047DE 11									1.000	25.40	36.04	0.645	0.625	15.88	F	F	M
LC 047DE 12									1.125	28.58	31.67	0.567	0.698	17.73	G	G	N
LC 047DE 13									1.250	31.75	28.24	0.506	0.771	19.58	G	G	N
LC 047DE 14									1.375	34.93	25.49	0.456	0.844	21.44	G	G	N
LC 047DE 15									1.500	38.10	23.22	0.416	0.917	23.29	G	G	N
LC 047DE 16									1.750	44.45	19.72	0.353	1.063	27.00	G	G	N
LC 047DE 17									2.000	50.80	17.13	0.307	1.208	30.68	G	G	N
LC 047DE 18									2.250	57.15	15.14	0.271	1.354	34.39	G	G	N
LC 047DE 19									2.500	63.50	13.57	0.243	1.500	38.10	G	G	N
LC 047DE 20									2.750	69.85	12.29	0.220	1.646	41.81	G	G	N
LC 047DE 21									3.000	76.20	11.24	0.201	1.792	45.52	G	G	N



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 026E 01	.360	9.15	.375	9.53	.026	.66	3.500	1.585	0.500	12.70	9.00	0.160	0.108	2.74	F	F	M
LC 026E 02									0.563	14.29	8.00	0.143	0.115	2.92	F	F	M
LC 026E 03									0.625	15.88	7.00	0.125	0.124	3.15	F	F	M
LC 026E 04									0.688	17.46	6.50	0.116	0.131	3.33	F	F	M
LC 026E 05									0.750	19.05	6.00	0.107	0.138	3.50	F	F	M
LC 026E 06									0.813	20.64	5.50	0.098	0.144	3.66	F	F	M
LC 026E 07									0.875	22.22	5.00	0.089	0.151	3.84	F	F	M
LC 026E 08									0.938	23.81	4.50	0.080	0.157	3.99	F	F	M
LC 026E 09									1.000	25.40	4.00	0.071	0.170	4.32	F	F	M
LC 026E 10									1.125	28.58	3.50	0.062	0.190	4.83	F	F	M
LC 026E 11									1.250	31.75	3.25	0.058	0.210	5.33	F	F	M
LC 026E 12									1.500	38.10	2.70	0.048	0.239	6.07	F	F	M
LC 026E 13									1.750	44.45	2.40	0.043	0.250	6.35	F	F	M
LC 026E 14									2.000	50.80	2.10	0.037	0.278	7.06	F	F	M
LC 026E 15									2.250	57.15	1.88	0.033	0.317	8.05	G	G	N
LC 029E 01	.360	9.15	.375	9.53	.029	.74	4.500	2.038	0.500	12.70	12.20	0.218	0.141	3.58	F	F	M
LC 029E 02									0.563	14.29	10.70	0.191	0.151	3.84	F	F	M
LC 029E 03									0.625	15.88	9.60	0.171	0.161	4.09	F	F	M
LC 029E 04									0.688	17.46	8.60	0.153	0.171	4.34	F	F	M
LC 029E 05									0.750	19.05	7.60	0.136	0.181	4.60	F	F	M
LC 029E 06									0.813	20.64	7.00	0.125	0.192	4.88	F	F	M
LC 029E 07									0.875	22.22	6.50	0.116	0.202	5.13	F	F	M
LC 029E 08									0.938	23.81	6.10	0.109	0.213	5.41	F	F	M
LC 029E 09									1.000	25.40	5.70	0.102	0.222	5.64	F	F	M
LC 029E 10									1.125	28.58	5.00	0.089	0.242	6.15	F	F	M
LC 029E 11									1.250	31.75	4.40	0.078	0.264	6.70	F	F	M
LC 029E 12									1.375	34.92	4.00	0.071	0.283	7.19	F	F	M
LC 029E 13									1.500	38.10	3.65	0.065	0.304	7.72	F	F	M
LC 029E 14									1.750	44.45	3.15	0.056	0.334	8.48	F	F	M
LC 029E 15									2.000	50.80	2.68	0.048	0.384	9.75	G	G	N
LC 032E 0	.360	9.15	.375	9.53	.032	.81	6.250	2.831	0.375	9.52	25.50	0.455	0.120	3.05	F	F	M
LC 032E 01									0.500	12.70	18.00	0.321	0.145	3.68	F	F	M
LC 032E 02									0.563	14.29	16.00	0.285	0.161	4.09	F	F	M
LC 032E 03									0.625	15.88	14.50	0.258	0.169	4.29	F	F	M
LC 032E 04									0.688	17.46	13.00	0.232	0.177	4.50	F	F	M
LC 032E 05									0.750	19.05	12.00	0.214	0.185	4.70	F	F	M
LC 032E 06									0.813	20.64	11.00	0.196	0.201	5.10	F	F	M
LC 032E 07									0.875	22.22	10.00	0.178	0.209	5.31	F	F	M
LC 032E 08									0.938	23.81	9.50	0.169	0.225	5.72	F	F	M
LC 032E 09									1.000	25.40	8.50	0.152	0.241	6.12	F	F	M
LC 032E 10									1.125	28.58	7.50	0.134	0.265	6.73	F	F	M
LC 032E 11									1.250	31.75	7.00	0.125	0.277	7.04	F	F	M
LC 032E 12									1.375	34.92	6.50	0.116	0.297	7.54	F	F	M
LC 032E 13									1.500	38.10	5.50	0.098	0.338	8.58	F	F	M
LC 032E 14									1.750	44.45	4.60	0.082	0.381	9.68	F	F	M
LC 032E 15									2.000	50.80	4.00	0.071	0.421	10.69	G	G	N
LC 032E 16									2.250	57.15	3.60	0.064	0.471	11.96	G	G	N
LC 032E 17									2.500	63.50	3.24	0.058	0.514	13.06	G	G	N

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 035E 01	.360	9.15	.375	9.53	.035	.89	7.750	3.510	0.438	11.11	27.80	0.496	0.164	4.16	F	F	M
LC 035E 02									0.500	12.70	23.70	0.422	0.178	4.52	F	F	M
LC 035E 03									0.563	14.29	20.30	0.362	0.194	4.93	F	F	M
LC 035E 04									0.625	15.88	18.00	0.321	0.208	5.28	F	F	M
LC 035E 05									0.688	17.46	16.00	0.285	0.223	5.66	F	F	M
LC 035E 06									0.750	19.05	14.70	0.262	0.238	6.04	F	F	M
LC 035E 07									0.813	20.64	13.30	0.237	0.252	6.40	F	F	M
LC 035E 08									0.875	22.22	12.50	0.223	0.266	6.76	F	F	M
LC 035E 09									0.938	23.81	11.70	0.209	0.279	7.09	F	F	M
LC 035E 10									1.000	25.40	11.00	0.196	0.293	7.44	F	F	M
LC 035E 11									1.125	28.58	9.50	0.169	0.325	8.26	F	F	M
LC 035E 12									1.250	31.75	8.60	0.153	0.351	8.92	F	F	M
LC 035E 13									1.375	34.92	7.70	0.137	0.381	9.68	F	F	M
LC 035E 14									1.500	38.10	7.00	0.125	0.410	10.41	F	F	M
LC 035E 15									1.750	44.45	6.10	0.109	0.465	11.81	G	G	N
LC 035E 16									2.000	50.80	5.20	0.093	0.525	13.34	G	G	N
LC 035E 17									2.250	57.15	4.60	0.082	0.580	14.73	G	G	N
LC 035E 18									2.500	63.50	4.10	0.073	0.640	16.26	G	G	N
LC 038E 01	.360	9.15	.375	9.53	.038	.96	10.250	4.642	0.438	11.11	38.00	0.678	0.172	4.37	F	F	M
LC 038E 02									0.500	12.70	32.00	0.570	0.191	4.85	F	F	M
LC 038E 03									0.563	14.29	28.00	0.499	0.200	5.08	F	F	M
LC 038E 04									0.625	15.88	25.00	0.446	0.219	5.56	F	F	M
LC 038E 05									0.688	17.46	22.00	0.392	0.239	6.07	F	F	M
LC 038E 06									0.750	19.05	21.00	0.374	0.248	6.30	F	F	M
LC 038E 07									0.813	20.64	19.00	0.339	0.267	6.78	F	F	M
LC 038E 08									0.875	22.22	17.00	0.303	0.286	7.26	F	F	M
LC 038E 09									0.938	23.81	16.00	0.285	0.305	7.75	F	F	M
LC 038E 10									1.000	25.40	15.00	0.267	0.324	8.23	F	F	M
LC 038E 11									1.125	28.58	13.00	0.232	0.352	8.94	F	F	M
LC 038E 12									1.250	31.75	12.00	0.214	0.381	9.68	F	F	M
LC 038E 13									1.375	34.92	10.00	0.178	0.438	11.12	F	F	M
LC 038E 14									1.500	38.10	9.00	0.160	0.477	12.12	F	F	M
LC 038E 15									1.750	44.45	8.20	0.146	0.518	13.16	G	G	N
LC 038E 16									2.000	50.80	7.50	0.134	0.575	14.60	G	G	N
LC 038E 17									2.250	57.15	6.50	0.116	0.632	16.05	G	G	N
LC 038E 18									2.500	63.50	5.80	0.103	0.714	18.14	G	G	N

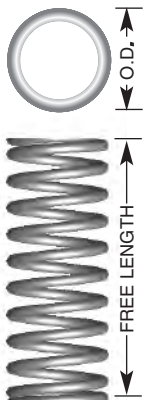

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 040E 01	.360	9.15	.375	9.53	.040	1.02	11.500	5.208	0.438	11.11	44.20	0.788	0.196	4.98	F	F	M
LC 040E 02									0.500	12.70	38.20	0.681	0.214	5.44	F	F	M
LC 040E 03									0.563	14.29	33.00	0.588	0.234	5.94	F	F	M
LC 040E 04									0.625	15.88	28.60	0.510	0.254	6.45	F	F	M
LC 040E 05									0.688	17.46	26.20	0.467	0.270	6.86	F	F	M
LC 040E 06									0.750	19.05	24.00	0.428	0.290	7.37	F	F	M
LC 040E 07									0.813	20.64	22.20	0.396	0.306	7.77	F	F	M
LC 040E 08									0.875	22.22	20.20	0.360	0.326	8.28	F	F	M
LC 040E 09									0.938	23.81	18.80	0.335	0.342	8.69	F	F	M
LC 040E 10									1.000	25.40	17.40	0.310	0.362	9.19	F	F	M
LC 040E 11									1.125	28.58	15.40	0.274	0.398	10.11	F	F	M
LC 040E 12									1.250	31.75	13.80	0.246	0.435	11.05	F	F	M
LC 040E 13									1.375	34.92	12.40	0.221	0.475	12.06	F	F	M
LC 040E 14									1.500	38.10	11.50	0.205	0.510	12.95	F	F	M
LC 040E 15									1.750	44.45	9.70	0.173	0.586	14.88	F	F	M
LC 040E 16									2.000	50.80	8.60	0.153	0.660	16.76	G	G	N
LC 040E 17									2.250	57.15	7.50	0.134	0.730	18.54	G	G	N
LC 040E 18									2.500	63.50	6.60	0.118	0.810	20.57	G	G	N
LC 042E 01	.360	9.15	.375	9.53	.042	1.07	13.500	6.114	0.438	11.13	56.00	0.998	0.201	5.10	F	F	M
LC 042E 02									0.500	12.70	46.00	0.820	0.222	5.64	F	F	M
LC 042E 03									0.563	14.29	42.00	0.749	0.232	5.89	F	F	M
LC 042E 04									0.625	15.88	37.00	0.660	0.253	6.43	F	F	M
LC 042E 05									0.688	17.46	33.00	0.588	0.274	6.96	F	F	M
LC 042E 06									0.750	19.05	31.00	0.553	0.285	7.24	F	F	M
LC 042E 07									0.813	20.64	28.00	0.499	0.306	7.77	F	F	M
LC 042E 08									0.875	22.22	25.00	0.446	0.337	8.56	F	F	M
LC 042E 09									0.938	23.81	23.00	0.410	0.359	9.12	F	F	M
LC 042E 10									1.000	25.40	21.00	0.374	0.379	9.63	F	F	M
LC 042E 11									1.125	28.58	19.00	0.339	0.411	10.44	F	F	M
LC 042E 12									1.250	31.75	17.00	0.303	0.453	11.51	F	F	M
LC 042E 13									1.375	34.92	16.00	0.285	0.485	12.32	F	F	M
LC 042E 14									1.500	38.10	14.50	0.258	0.527	13.38	F	F	M
LC 042E 15									1.750	44.45	12.00	0.214	0.614	15.60	G	G	N
LC 042E 16									2.000	50.80	10.50	0.187	0.677	17.20	G	G	N
LC 042E 17									2.250	57.15	9.00	0.160	0.769	19.53	G	G	N
LC 042E 18									2.500	63.50	8.25	0.147	0.850	21.59	G	G	N

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 045E 01	.360	9.15	.375	9.53	.045	1.14	16.500	7.473	0.438	11.13	75.00	1.337	0.215	5.46	F	F	M
LC 045E 02									0.500	12.70	65.00	1.159	0.232	5.89	F	F	M
LC 045E 03									0.563	14.29	55.00	0.981	0.260	6.60	F	F	M
LC 045E 04									0.625	15.88	49.00	0.874	0.271	6.88	F	F	M
LC 045E 05									0.688	17.46	44.00	0.784	0.294	7.47	F	F	M
LC 045E 06									0.750	19.05	40.00	0.713	0.316	8.03	F	F	M
LC 045E 07									0.813	20.64	37.00	0.660	0.339	8.61	F	F	M
LC 045E 08									0.875	22.22	33.00	0.588	0.361	9.17	F	F	M
LC 045E 09									0.938	23.81	30.00	0.535	0.395	10.03	F	F	M
LC 045E 10									1.000	25.40	28.00	0.499	0.417	10.59	F	F	M
LC 045E 11									1.125	28.58	25.00	0.446	0.451	11.46	F	F	M
LC 045E 12									1.250	31.75	22.00	0.392	0.512	13.00	F	F	M
LC 045E 13									1.375	34.92	20.00	0.357	0.541	13.74	F	F	M
LC 045E 14									1.500	38.10	18.00	0.321	0.586	14.88	F	F	M
LC 045E 15									1.750	44.45	15.50	0.276	0.681	17.30	G	G	N
LC 045E 16									2.000	50.80	13.30	0.237	0.762	19.35	G	G	N
LC 045E 17									2.250	57.15	11.80	0.210	0.851	21.62	G	G	N
LC 045E 18									2.500	63.50	10.60	0.189	0.945	24.00	G	G	N
LC 045E 19									2.750	69.85	9.37	0.167	1.045	26.54	G	G	N
LC 047E 01	.360	9.15	.375	9.53	.047	1.19	20.800	9.430	0.438	11.13	93.00	1.660	0.221	5.62	F	F	M
LC 047E 02									0.500	12.70	78.80	1.407	0.243	6.18	F	F	M
LC 047E 03									0.563	14.30	68.20	1.218	0.266	6.76	F	F	M
LC 047E 04									0.625	15.88	60.20	1.076	0.289	7.33	F	F	M
LC 047E 05									0.688	17.48	53.80	0.962	0.311	7.91	F	F	M
LC 047E 06									0.750	19.05	48.80	0.871	0.334	8.48	F	F	M
LC 047E 07									0.813	20.65	44.50	0.794	0.357	9.06	F	F	M
LC 047E 08									0.875	22.23	41.00	0.731	0.379	9.63	F	F	M
LC 047E 09									0.938	23.83	37.90	0.677	0.402	10.20	F	F	M
LC 047E 10									1.000	25.40	35.30	0.630	0.424	10.77	F	F	M
LC 047E 11									1.125	28.58	31.00	0.554	0.469	11.92	F	F	M
LC 047E 12									1.250	31.75	27.70	0.494	0.514	13.07	G	G	N
LC 047E 13									1.375	34.93	25.00	0.446	0.560	14.21	G	G	N
LC 047E 14									1.500	38.10	22.70	0.406	0.605	15.36	G	G	N
LC 047E 15									1.750	44.45	19.30	0.345	0.695	17.66	G	G	N
LC 047E 16									2.000	50.80	16.80	0.300	0.785	19.95	J	J	P
LC 047E 17									2.250	57.15	14.80	0.265	0.876	22.24	J	J	P
LC 047E 18									2.500	63.50	13.30	0.237	0.966	24.54	J	J	P
LC 047E 19									2.750	69.85	12.00	0.215	1.056	26.83	K	M	T
LC 047E 20									3.000	76.20	11.00	0.197	1.147	29.13	K	M	T
LC 047E 21									3.250	82.55	10.10	0.180	1.241	31.52	K	L	S
LC 047E 22									3.500	88.90	9.40	0.168	1.326	33.68	K	L	S



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 049E 01	.360	9.15	.375	9.53	.049	1.24	23.000	10.430	0.438	11.13	109.10	1.948	0.234	5.94	F	F	M
LC 049E 02									0.500	12.70	92.20	1.647	0.258	6.56	F	F	M
LC 049E 03									0.562	14.27	79.90	1.427	0.282	7.17	F	F	M
LC 049E 04									0.625	15.88	70.40	1.257	0.307	7.80	F	F	M
LC 049E 05									0.687	17.45	63.00	1.124	0.331	8.42	F	F	M
LC 049E 06									0.750	19.05	56.90	1.016	0.356	9.04	F	F	M
LC 049E 07									0.812	20.62	51.90	0.928	0.380	9.66	F	F	M
LC 049E 08									0.875	22.23	47.70	0.852	0.405	10.29	F	F	M
LC 049E 09									1.000	25.40	41.10	0.734	0.454	11.53	F	F	M
LC 049E 10									1.125	28.58	36.10	0.645	0.503	12.77	G	G	N
LC 049E 11									1.250	31.75	32.20	0.575	0.552	14.01	G	G	N
LC 049E 12									1.375	34.93	29.00	0.519	0.601	15.25	G	G	N
LC 049E 13									1.500	38.10	26.50	0.472	0.649	16.50	G	G	N
LC 049E 14									1.750	44.45	22.40	0.401	0.747	18.98	J	J	P
LC 049E 15									2.000	50.80	19.50	0.348	0.845	21.47	J	J	P
LC 049E 16									2.250	57.15	17.20	0.308	0.943	23.95	J	J	P
LC 049E 17									2.500	63.50	15.40	0.276	1.041	26.43	J	K	R
LC 049E 18									2.750	69.85	14.00	0.250	1.139	28.92	K	M	T
LC 049E 19									3.000	76.20	12.80	0.228	1.236	31.40	K	M	T
LC 049E 20									3.250	82.55	11.80	0.211	1.330	33.79	K	M	T
LC 049E 21									3.500	88.90	10.90	0.195	1.432	36.37	K	M	T
LC 051E 01	.360	9.15	.375	9.53	.051	1.30	25.500	11.570	0.438	11.13	127.71	2.281	0.246	6.26	F	F	M
LC 051E 02									0.500	12.70	107.82	1.925	0.272	6.92	F	F	M
LC 051E 03									0.562	14.27	93.28	1.666	0.298	7.58	F	F	M
LC 051E 04									0.625	15.88	82.05	1.465	0.325	8.25	F	F	M
LC 051E 05									0.687	17.45	73.35	1.310	0.351	8.91	F	F	M
LC 051E 06									0.750	19.05	66.22	1.183	0.377	9.59	F	F	M
LC 051E 07									0.812	20.62	60.44	1.079	0.403	10.25	F	F	M
LC 051E 08									0.875	22.23	55.51	0.991	0.430	10.92	F	F	M
LC 051E 09									1.000	25.40	47.78	0.853	0.482	12.25	F	F	M
LC 051E 10									1.125	28.58	41.95	0.749	0.535	13.59	G	G	N
LC 051E 11									1.250	31.75	37.38	0.668	0.587	14.92	G	G	N
LC 051E 12									1.375	34.93	33.71	0.602	0.640	16.26	G	G	N
LC 051E 13									1.500	38.10	30.69	0.548	0.693	17.59	G	G	N
LC 051E 14									1.750	44.45	26.04	0.465	0.798	20.26	J	J	P
LC 051E 15									2.000	50.80	22.61	0.404	0.903	22.93	J	J	P
LC 051E 16									2.250	57.15	19.98	0.357	1.008	25.60	J	J	P
LC 051E 17									2.500	63.50	17.89	0.320	1.113	28.27	J	J	P
LC 051E 18									2.750	69.85	16.20	0.289	1.218	30.93	K	M	T
LC 051E 19									3.000	76.20	14.81	0.264	1.323	33.60	K	M	T
LC 051E 20									3.250	82.55	13.60	0.243	1.434	36.41	K	M	T
LC 051E 21									3.500	88.90	12.60	0.225	1.539	39.09	K	M	T

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 055E 01	.360	9.15	.375	9.53	.055	1.40	30.750	13.950	0.438	11.13	174.90	3.123	0.270	6.86	F	F	M
LC 055E 02									0.500	12.70	147.10	2.626	0.300	7.61	F	F	M
LC 055E 03									0.562	14.27	126.90	2.266	0.329	8.36	F	F	M
LC 055E 04									0.625	15.88	111.40	1.989	0.359	9.13	F	F	M
LC 055E 05									0.687	17.45	99.40	1.775	0.389	9.88	F	F	M
LC 055E 06									0.750	19.05	89.60	1.600	0.419	10.65	F	F	M
LC 055E 07									0.812	20.62	81.70	1.459	0.449	11.40	F	F	M
LC 055E 08									0.875	22.23	75.00	1.339	0.479	12.16	F	F	M
LC 055E 09									1.000	25.40	64.40	1.151	0.539	13.68	F	F	M
LC 055E 10									1.125	28.58	56.50	1.009	0.598	15.20	G	G	N
LC 055E 11									1.250	31.75	50.30	0.898	0.658	16.71	G	G	N
LC 055E 12									1.375	34.93	45.30	0.810	0.718	18.23	G	G	N
LC 055E 13									1.500	38.10	41.30	0.737	0.777	19.75	G	G	N
LC 055E 14									1.750	44.45	35.00	0.625	0.897	22.78	J	J	P
LC 055E 15									2.000	50.80	30.30	0.542	1.016	25.82	J	J	P
LC 055E 16									2.250	57.15	26.80	0.479	1.136	28.85	J	K	R
LC 055E 17									2.500	63.50	24.00	0.429	1.255	31.88	J	K	R
LC 055E 18									2.750	69.85	21.70	0.388	1.375	34.92	K	M	T
LC 055E 19									3.000	76.20	19.80	0.354	1.494	37.95	K	M	T
LC 055E 20									3.250	82.55	18.50	0.330	1.595	40.51	K	M	T
LC 055E 21									3.500	88.90	17.10	0.305	1.716	43.59	K	M	T
LC 059E 01	.360	9.15	.375	9.53	.059	1.50	35.050	15.900	0.438	11.13	232.19	4.146	0.296	7.51	G	G	N
LC 059E 02									0.500	12.70	194.50	3.473	0.329	8.37	G	G	N
LC 059E 03									0.562	14.27	167.34	2.988	0.363	9.22	G	G	N
LC 059E 04									0.625	15.88	146.55	2.617	0.397	10.09	G	G	N
LC 059E 05									0.687	17.45	130.58	2.332	0.431	10.95	G	G	N
LC 059E 06									0.750	19.05	117.56	2.099	0.465	11.82	G	G	N
LC 059E 07									0.812	20.62	107.06	1.912	0.499	12.68	G	G	N
LC 059E 08									0.875	22.23	98.15	1.753	0.533	13.55	G	G	N
LC 059E 09									1.000	25.40	84.24	1.504	0.601	15.28	G	G	N
LC 059E 10									1.125	28.58	73.78	1.318	0.669	17.00	J	J	P
LC 059E 11									1.250	31.75	65.64	1.172	0.737	18.73	J	J	P
LC 059E 12									1.375	34.93	59.11	1.056	0.805	20.46	J	J	P
LC 059E 13									1.500	38.10	53.76	0.960	0.873	22.18	J	J	P
LC 059E 14									1.750	44.45	45.53	0.813	1.009	25.64	J	J	P
LC 059E 15									2.000	50.80	39.48	0.705	1.145	29.09	J	J	P
LC 059E 16									2.250	57.15	34.85	0.622	1.281	32.55	K	L	S
LC 059E 17									2.500	63.50	31.19	0.557	1.417	36.00	K	L	S
LC 059E 18									2.750	69.85	28.23	0.504	1.553	39.46	L	M	T
LC 059E 19									3.000	76.20	25.78	0.460	1.689	42.91	L	M	T
LC 059E 20									3.250	82.55	23.70	0.423	1.831	46.50	L	M	T
LC 059E 21									3.500	88.90	21.80	0.389	1.979	50.28	L	M	T



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 026EE 01	.375	9.53	.391	9.92	.026	.66	2.353	1.067	0.500	12.70	6.24	0.111	0.123	3.12	F	F	M
LC 026EE 02									0.563	14.30	5.47	0.098	0.133	3.37	F	F	M
LC 026EE 03									0.625	15.88	4.88	0.087	0.142	3.61	F	F	M
LC 026EE 04									0.688	17.48	4.39	0.078	0.152	3.86	F	F	M
LC 026EE 05									0.750	19.05	4.00	0.071	0.161	4.10	F	F	M
LC 026EE 06									0.813	20.65	3.67	0.066	0.171	4.35	F	F	M
LC 026EE 07									0.875	22.23	3.40	0.061	0.181	4.59	F	F	M
LC 026EE 08									0.938	23.83	3.15	0.056	0.190	4.84	F	F	M
LC 026EE 09									1.000	25.40	2.95	0.053	0.200	5.08	F	F	M
LC 026EE 10									1.125	28.58	2.60	0.047	0.219	5.57	F	F	M
LC 026EE 11									1.250	31.75	2.33	0.042	0.239	6.06	F	F	M
LC 026EE 12									1.500	38.10	1.93	0.034	0.277	7.04	F	F	M
LC 026EE 13									1.750	44.45	1.65	0.029	0.316	8.03	F	F	M
LC 026EE 14									2.000	50.80	1.43	0.026	0.355	9.01	F	F	M
LC 026EE 15									2.250	57.15	1.27	0.023	0.393	9.99	G	G	N
LC 032EE 01	.375	9.53	.391	9.92	.032	.81	3.808	1.727	0.375	9.53	16.48	0.294	0.144	3.66	F	F	M
LC 032EE 02									0.500	12.70	11.75	0.210	0.175	4.45	F	F	M
LC 032EE 03									0.563	14.30	10.27	0.183	0.191	4.85	F	F	M
LC 032EE 04									0.625	15.88	9.13	0.163	0.207	5.25	F	F	M
LC 032EE 05									0.688	17.48	8.21	0.147	0.222	5.65	F	F	M
LC 032EE 06									0.750	19.05	7.47	0.133	0.238	6.04	F	F	M
LC 032EE 07									0.813	20.65	6.84	0.122	0.254	6.44	F	F	M
LC 032EE 08									0.875	22.23	6.32	0.113	0.269	6.84	F	F	M
LC 032EE 09									0.938	23.83	5.86	0.105	0.285	7.24	F	F	M
LC 032EE 10									1.000	25.40	5.47	0.098	0.301	7.64	F	F	M
LC 032EE 11									1.125	28.58	4.83	0.086	0.332	8.43	F	F	M
LC 032EE 12									1.250	31.75	4.32	0.077	0.363	9.23	F	F	M
LC 032EE 13									1.375	34.93	3.91	0.070	0.395	10.02	F	F	M
LC 032EE 14									1.500	38.10	3.57	0.064	0.426	10.82	F	F	M
LC 032EE 15									1.750	44.45	3.04	0.054	0.489	12.41	F	F	M
LC 032EE 16									2.000	50.80	2.65	0.047	0.551	14.00	G	G	N
LC 032EE 17									2.250	57.15	2.34	0.042	0.614	15.59	G	G	N
LC 032EE 18									2.500	63.50	2.10	0.038	0.677	17.19	G	G	N

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 035EE 01	.375	9.53	.391	9.92	.035	.89	4.483	2.034	0.438	11.13	17.90	0.320	0.187	4.76	F	F	M
LC 035EE 02									0.500	12.70	15.32	0.273	0.207	5.26	F	F	M
LC 035EE 03									0.563	14.30	13.36	0.239	0.227	5.76	F	F	M
LC 035EE 04									0.625	15.88	11.87	0.212	0.246	6.25	F	F	M
LC 035EE 05									0.688	17.48	10.66	0.190	0.266	6.75	F	F	M
LC 035EE 06									0.750	19.05	9.68	0.173	0.285	7.25	F	F	M
LC 035EE 07									0.813	20.65	8.86	0.158	0.305	7.75	F	F	M
LC 035EE 08									0.875	22.23	8.18	0.146	0.324	8.24	F	F	M
LC 035EE 09									0.938	23.83	7.59	0.135	0.344	8.74	F	F	M
LC 035EE 10									1.000	25.40	7.08	0.126	0.364	9.24	F	F	M
LC 035EE 11									1.125	28.58	6.24	0.111	0.403	10.23	F	F	M
LC 035EE 12									1.250	31.75	5.58	0.100	0.442	11.23	F	F	M
LC 035EE 13									1.375	34.93	5.05	0.090	0.481	12.22	F	F	M
LC 035EE 14									1.500	38.10	4.61	0.082	0.520	13.22	F	F	M
LC 035EE 15									1.750	44.45	3.92	0.070	0.599	15.21	G	G	N
LC 035EE 16									2.000	50.80	3.41	0.061	0.677	17.20	G	G	N
LC 035EE 17	.390	9.91	.406	10.31	.043	1.09	11.000	4.982	2.250	57.15	3.02	0.054	0.756	19.19	G	G	N
LC 035EE 18									2.500	63.50	2.71	0.048	0.834	21.18	G	G	N
LC 043EF 01									0.500	12.70	38.00	0.678	0.224	5.69	G	G	N
LC 043EF 02									0.563	14.29	33.00	0.588	0.245	6.22	G	G	N
LC 043EF 03									0.625	15.88	28.50	0.508	0.267	6.78	G	G	N
LC 043EF 04									0.688	17.46	26.00	0.464	0.288	7.32	G	G	N
LC 043EF 05									0.750	19.05	24.00	0.428	0.310	7.87	G	G	N
LC 043EF 06									0.813	20.64	22.00	0.392	0.327	8.30	G	G	N
LC 043EF 07									0.875	22.22	20.00	0.357	0.348	8.84	G	G	N
LC 043EF 08									0.938	23.81	18.25	0.325	0.370	9.40	G	G	N
LC 043EF 09									1.000	25.40	17.00	0.303	0.391	9.93	G	G	N
LC 043EF 10									1.125	28.58	15.00	0.267	0.435	11.05	G	G	N
LC 043EF 11									1.250	31.75	13.50	0.241	0.473	12.01	G	G	N
LC 043EF 12									1.375	34.92	12.25	0.218	0.516	13.11	G	G	N
LC 043EF 13									1.500	38.10	11.25	0.200	0.559	14.20	G	G	N
LC 043EF 14									1.750	44.45	9.60	0.171	0.640	16.26	G	G	N
LC 047EF 01	.390	9.91	.406	10.31	.047	1.19	14.000	6.340	0.500	12.70	55.00	0.981	0.249	6.32	G	G	N
LC 047EF 02									0.563	14.29	47.50	0.847	0.273	6.93	G	G	N
LC 047EF 03									0.625	15.88	42.00	0.749	0.296	7.52	G	G	N
LC 047EF 04									0.688	17.46	38.00	0.678	0.320	8.13	G	G	N
LC 047EF 05									0.750	19.05	34.50	0.615	0.343	8.71	G	G	N
LC 047EF 06									0.813	20.64	31.50	0.562	0.366	9.30	G	G	N
LC 047EF 07									0.875	22.22	28.50	0.508	0.395	10.03	G	G	N
LC 047EF 08									0.938	23.81	26.50	0.472	0.418	10.62	G	G	N
LC 047EF 09									1.000	25.40	25.00	0.446	0.442	11.23	G	G	N
LC 047EF 10									1.125	28.58	22.00	0.392	0.489	12.42	G	G	N
LC 047EF 11									1.250	31.75	19.30	0.344	0.536	13.61	G	G	N
LC 047EF 12									1.375	34.92	17.50	0.312	0.583	14.81	G	G	N
LC 047EF 13									1.500	38.10	16.00	0.285	0.630	16.00	G	G	N
LC 047EF 14									1.750	44.45	13.60	0.242	0.729	18.52	G	G	N
LC 047EF 15									2.000	50.80	11.70	0.209	0.832	21.13	G	G	N



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 035F 01	.420	10.67	.438	11.13	.035	.89	6.200	2.810	0.500	12.70	17.70	0.316	0.158	4.01	F	F	M
LC 035F 02									0.625	15.88	13.70	0.245	0.181	4.60	F	F	M
LC 035F 03									0.750	19.05	11.20	0.200	0.203	5.16	F	F	M
LC 035F 04									0.875	22.23	9.50	0.170	0.225	5.72	F	F	M
LC 035F 05									1.000	25.40	8.20	0.146	0.249	6.32	F	F	M
LC 035F 06									1.250	31.75	6.50	0.116	0.293	7.44	F	F	M
LC 035F 07									1.500	38.10	5.30	0.095	0.341	8.66	F	F	M
LC 035F 08									1.750	44.45	4.60	0.082	0.380	9.65	G	G	N
LC 038F 01	.420	10.67	.438	11.13	.038	.96	8.000	3.623	0.500	12.70	23.00	0.410	0.172	4.37	F	F	M
LC 038F 02									0.625	15.88	18.00	0.321	0.200	5.08	F	F	M
LC 038F 03									0.750	19.05	14.00	0.250	0.229	5.82	F	F	M
LC 038F 04									0.875	22.22	12.00	0.214	0.258	6.55	F	F	M
LC 038F 05									1.000	25.40	11.00	0.196	0.286	7.26	F	F	M
LC 038F 06									1.250	31.75	8.50	0.152	0.343	8.71	F	F	M
LC 038F 07									1.500	38.10	7.00	0.125	0.381	9.68	F	F	M
LC 038F 08									1.750	44.45	6.00	0.107	0.438	11.12	G	G	N
LC 038F 09									2.000	50.80	5.20	0.093	0.496	12.60	G	G	N
LC 038F 10									2.250	57.15	4.60	0.082	0.550	13.97	G	G	N
LC 038F 11									2.500	63.50	4.20	0.075	0.594	15.09	G	G	N
LC 042F 01	.420	10.67	.438	11.13	.042	1.07	11.000	4.982	0.500	12.70	34.00	0.606	0.190	4.83	F	F	M
LC 042F 02									0.625	15.88	27.00	0.481	0.222	5.64	F	F	M
LC 042F 03									0.750	19.05	22.00	0.392	0.253	6.43	F	F	M
LC 042F 04									0.875	22.22	18.50	0.330	0.285	7.24	F	F	M
LC 042F 05									1.000	25.40	16.00	0.285	0.316	8.03	F	F	M
LC 042F 06									1.250	31.75	13.00	0.232	0.369	9.37	G	G	N
LC 042F 07									1.500	38.10	10.50	0.187	0.442	11.23	G	G	N
LC 042F 08									1.750	44.45	9.00	0.160	0.499	12.67	G	G	N
LC 042F 09									2.000	50.80	7.50	0.134	0.580	14.73	G	G	N
LC 042F 10									2.250	57.15	6.70	0.120	0.636	16.15	G	G	N
LC 042F 11									2.500	63.50	6.00	0.107	0.699	17.75	G	G	N
LC 045F 01	.420	10.67	.438	11.13	.045	1.14	13.000	5.900	0.500	12.70	44.40	0.793	0.219	5.56	F	F	M
LC 045F 02									0.625	15.88	34.00	0.607	0.255	6.48	F	F	M
LC 045F 03									0.750	19.05	27.60	0.493	0.291	7.39	F	F	M
LC 045F 04									0.875	22.23	23.20	0.414	0.327	8.31	F	F	M
LC 045F 05									1.000	25.40	20.00	0.357	0.363	9.22	F	F	M
LC 045F 06									1.250	31.75	15.70	0.280	0.435	11.05	G	G	N
LC 045F 07									1.500	38.10	12.90	0.230	0.507	12.88	G	G	N
LC 045F 08									1.750	44.45	11.00	0.196	0.577	14.66	J	J	P
LC 045F 09									2.000	50.80	9.60	0.171	0.647	16.43	J	J	P
LC 045F 10									2.250	57.15	8.40	0.150	0.725	18.42	J	J	P
LC 045F 11									2.500	63.50	7.60	0.136	0.791	20.09	J	J	P

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 047F 01	.420	10.67	.438	11.13	.047	1.19	15.500	7.020	0.500	12.70	54.00	0.963	0.218	5.54	F	F	M
LC 047F 02									0.625	15.88	41.00	0.731	0.260	6.60	F	F	M
LC 047F 03									0.750	19.05	34.00	0.606	0.283	7.19	F	F	M
LC 047F 04									0.875	22.22	28.00	0.499	0.330	8.38	F	F	M
LC 047F 05									1.000	25.40	25.00	0.446	0.377	9.58	F	F	M
LC 047F 06									1.250	31.75	19.00	0.339	0.447	11.35	G	G	N
LC 047F 07									1.500	38.10	15.50	0.276	0.519	13.18	G	G	N
LC 047F 08									1.750	44.45	13.50	0.241	0.579	14.71	J	J	P
LC 047F 09									2.000	50.80	11.50	0.205	0.683	17.35	J	J	P
LC 051F 01	.420	10.67	.438	11.13	.051	1.30	18.700	8.480	0.500	12.70	72.10	1.288	0.255	6.48	F	F	M
LC 051F 02									0.625	15.88	54.90	0.980	0.300	7.62	F	F	M
LC 051F 03									0.750	19.05	44.30	0.791	0.345	8.76	F	F	M
LC 051F 04									0.875	22.23	37.10	0.663	0.390	9.91	F	F	M
LC 051F 05									1.000	25.40	32.00	0.571	0.434	11.02	F	F	M
LC 051F 06									1.250	31.75	25.00	0.446	0.525	13.34	G	G	N
LC 051F 07									1.500	38.10	20.50	0.366	0.615	15.62	G	G	N
LC 051F 08									1.750	44.45	17.40	0.311	0.705	17.91	J	K	R
LC 051F 09									2.000	50.80	15.10	0.270	0.795	20.19	J	K	R
LC 051F 10	.420	10.67	.438	11.13	.055	1.40	24.000	10.870	2.250	57.15	13.40	0.239	0.881	22.38	K	M	T
LC 051F 11									2.500	63.50	12.00	0.214	0.971	24.66	K	M	T
LC 055F 01									0.500	12.70	95.00	1.694	0.276	7.01	F	F	M
LC 055F 02									0.625	15.88	75.00	1.337	0.317	8.05	F	F	M
LC 055F 03									0.750	19.05	61.00	1.088	0.373	9.47	F	F	M
LC 055F 04									0.875	22.22	52.00	0.927	0.414	10.52	F	F	M
LC 055F 05									1.000	25.40	44.00	0.784	0.469	11.91	F	F	M
LC 055F 06									1.250	31.75	35.00	0.624	0.551	14.00	G	G	N
LC 055F 07									1.500	38.10	28.00	0.499	0.661	16.79	G	G	N
LC 055F 08									1.750	44.45	24.00	0.428	0.765	19.43	J	K	R
LC 055F 09									2.000	50.80	21.00	0.374	0.841	21.36	J	K	R
LC 055F 10									2.250	57.15	18.00	0.321	0.950	24.13	K	M	T
LC 055F 11									2.500	63.50	16.25	0.290	1.045	26.54	K	M	T
LC 059F 01	.420	10.67	.438	11.13	.059	1.50	29.500	13.380	0.500	12.70	136.80	2.443	0.285	7.23	F	F	M
LC 059F 02									0.625	15.88	103.10	1.841	0.339	8.61	F	F	M
LC 059F 03									0.750	19.05	82.70	1.477	0.394	10.00	G	G	N
LC 059F 04									0.875	22.23	69.00	1.233	0.448	11.38	G	G	N
LC 059F 05									1.000	25.40	59.20	1.058	0.503	12.77	G	G	N
LC 059F 06									1.250	31.75	46.20	0.824	0.612	15.54	J	J	P
LC 059F 07									1.500	38.10	37.80	0.675	0.721	18.31	J	J	P
LC 059F 08									1.750	44.45	32.00	0.572	0.830	21.08	K	L	S
LC 059F 09									2.000	50.80	27.80	0.496	0.939	23.85	K	L	S
LC 059F 10	.420	10.67	.438	11.13	.059	1.50	29.500	13.380	2.250	57.15	24.50	0.438	1.048	26.62	L	P	W
LC 059F 11									2.500	63.50	21.90	0.392	1.157	29.39	L	P	W



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 063F 01	.420	10.67	.438	11.13	.063	1.60	35.500	16.100	0.500	12.70	183.00	3.268	0.315	8.00	J	J	P
LC 063F 02									0.625	15.88	137.00	2.447	0.375	9.53	J	J	P
LC 063F 03									0.750	19.05	109.00	1.947	0.436	11.07	J	J	P
LC 063F 04									0.875	22.23	91.00	1.625	0.496	12.60	J	J	P
LC 063F 05									1.000	25.40	78.00	1.393	0.556	14.12	J	J	P
LC 063F 06									1.250	31.75	60.50	1.080	0.677	17.20	K	K	R
LC 063F 07									1.500	38.10	49.60	0.886	0.796	20.22	K	K	R
LC 063F 08									1.750	44.45	41.90	0.748	0.917	23.29	L	M	T
LC 063F 09									2.000	50.80	36.30	0.648	1.043	26.49	L	M	T
LC 063F 10									2.250	57.15	32.00	0.571	1.159	29.44	M	P	W
LC 063F 11									2.500	63.50	28.70	0.513	1.277	32.44	M	P	W
LC 067F 01	.420	10.67	.438	11.13	.067	1.70	42.460	19.260	0.750	19.05	143.67	2.566	0.468	11.89	J	J	P
LC 067F 02									1.000	25.40	102.20	1.825	0.602	15.29	K	K	R
LC 067F 03									1.250	31.75	79.30	1.416	0.736	18.69	K	K	R
LC 067F 04									1.500	38.10	64.79	1.157	0.870	22.10	L	M	T
LC 067F 05									1.750	44.45	54.77	0.978	1.004	25.50	L	M	T
LC 067F 06									2.000	50.80	47.43	0.847	1.138	28.90	M	P	W
LC 067F 07									2.250	57.15	41.82	0.747	1.272	32.30	M	P	W
LC 067F 08									2.500	63.50	37.41	0.668	1.406	35.71	M	P	W
LC 072F 01	.420	10.67	.438	11.13	.072	1.83	48.000	21.770	1.000	25.40	139.20	2.486	0.658	16.71	K	K	R
LC 072F 02									1.250	31.75	107.70	1.923	0.807	20.50	K	K	R
LC 072F 03									1.500	38.10	87.90	1.570	0.955	24.26	L	M	T
LC 072F 04									1.750	44.45	74.20	1.325	1.104	28.05	L	M	T
LC 072F 05									2.000	50.80	64.20	1.146	1.253	31.83	M	P	W
LC 072F 06									2.250	57.15	56.60	1.011	1.402	35.60	M	P	W
LC 072F 07									2.500	63.50	50.60	0.904	1.550	39.37	M	P	W
LC 032FF 01	.437	11.10	.469	11.91	.032	.81	3.857	1.750	0.500	12.70	10.68	0.191	0.139	3.53	F	F	M
LC 032FF 02									0.625	15.88	8.30	0.149	0.160	4.06	F	F	M
LC 032FF 03									0.750	19.05	6.79	0.122	0.181	4.60	F	F	M
LC 032FF 04									0.875	22.23	5.74	0.103	0.202	5.13	F	F	M
LC 032FF 05									1.000	25.40	4.98	0.089	0.223	5.66	F	F	M
LC 032FF 06									1.250	31.75	3.93	0.070	0.265	6.73	F	F	M
LC 032FF 07									1.500	38.10	3.24	0.058	0.307	7.80	F	F	M
LC 032FF 08									1.750	44.45	2.76	0.049	0.348	8.84	F	F	M
LC 032FF 09									2.000	50.80	2.41	0.043	0.390	9.91	G	G	N
LC 032FF 10									2.125	53.98	2.26	0.040	0.411	10.44	G	G	N
LC 041FF 01	.437	11.10	.469	11.91	.041	1.04	7.771	3.525	0.500	12.70	25.64	0.459	0.197	5.00	F	F	M
LC 041FF 02									0.625	15.88	19.74	0.353	0.231	5.87	F	F	M
LC 041FF 03									0.750	19.05	16.04	0.287	0.264	6.71	F	F	M
LC 041FF 04									0.875	22.23	13.51	0.242	0.298	7.57	F	F	M
LC 041FF 05									1.000	25.40	11.67	0.209	0.331	8.41	F	F	M
LC 041FF 06									1.063	27.00	10.90	0.195	0.349	8.86	G	G	N
LC 041FF 07									1.250	31.75	9.16	0.164	0.399	10.13	G	G	N
LC 041FF 08									1.500	38.10	7.54	0.135	0.467	11.86	G	G	N
LC 041FF 09									1.750	44.45	6.41	0.115	0.534	13.56	G	G	N
LC 041FF 10									2.000	50.80	5.58	0.100	0.601	15.27	G	G	N

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 054FF 01	.437	11.10	.469	11.91	.054	1.37	16.532	7.499	0.500	12.70	75.00	1.343	0.280	7.11	F	F	M
LC 054FF 02									0.625	15.88	56.87	1.018	0.333	8.46	F	F	M
LC 054FF 03									0.750	19.05	45.80	0.820	0.387	9.83	F	F	M
LC 054FF 04									0.875	22.23	38.33	0.686	0.441	11.20	F	F	M
LC 054FF 05									1.000	25.40	32.96	0.590	0.494	12.55	F	F	M
LC 054FF 06									1.250	31.75	25.75	0.461	0.602	15.29	G	G	N
LC 054FF 07									1.500	38.10	21.12	0.378	0.709	18.01	G	G	N
LC 054FF 08									1.750	44.45	17.91	0.321	0.816	20.73	J	K	R
LC 054FF 09									2.000	50.80	15.54	0.278	0.924	23.47	J	K	R
LC 054FF 10									2.250	57.15	13.73	0.246	1.031	26.19	K	M	T
LC 054FF 11									2.500	63.50	12.29	0.220	1.139	28.93	K	M	T
LC 039FG 01	.455	11.56	.469	11.91	.039	.99	7.000	3.170	0.500	12.70	20.00	0.357	0.172	4.37	G	G	N
LC 039FG 02									0.625	15.88	15.70	0.280	0.199	5.05	G	G	N
LC 039FG 03									0.750	19.05	12.60	0.225	0.226	5.74	G	G	N
LC 039FG 04									0.875	22.22	10.80	0.192	0.254	6.45	G	G	N
LC 039FG 05									1.000	25.40	9.40	0.168	0.283	7.19	G	G	N
LC 039FG 06									1.250	31.75	7.20	0.128	0.339	8.61	G	G	N
LC 039FG 07									1.500	38.10	5.90	0.105	0.394	10.01	G	G	N
LC 039FG 08									1.750	44.45	5.00	0.089	0.448	11.38	G	G	N
LC 046FG 01	.455	11.56	.469	11.91	.046	1.17	11.000	4.982	0.500	12.70	37.00	0.660	0.212	5.38	G	G	N
LC 046FG 02									0.625	15.88	28.50	0.508	0.248	6.30	G	G	N
LC 046FG 03									0.750	19.05	23.00	0.410	0.285	7.24	G	G	N
LC 046FG 04									0.875	22.22	19.25	0.343	0.322	8.18	G	G	N
LC 046FG 05									1.000	25.40	16.75	0.299	0.359	9.12	G	G	N
LC 046FG 06									1.250	31.75	13.00	0.232	0.432	10.97	J	J	P
LC 046FG 07									1.500	38.10	10.75	0.192	0.506	12.85	J	J	P
LC 046FG 08									1.750	44.45	9.25	0.165	0.575	14.60	J	J	P
LC 036G 01	.480	12.19	.500	12.70	.036	.91	5.680	2.580	0.500	12.70	15.70	0.280	0.142	3.61	F	F	M
LC 036G 02									0.625	15.88	12.15	0.217	0.162	4.11	F	F	M
LC 036G 03									0.750	19.05	9.91	0.177	0.182	4.62	F	F	M
LC 036G 04									0.875	22.22	8.37	0.149	0.202	5.12	F	F	M
LC 036G 05									1.000	25.40	7.24	0.129	0.222	5.63	F	F	M
LC 036G 06									1.250	31.75	5.71	0.102	0.261	6.64	G	G	N
LC 036G 07									1.500	38.10	4.71	0.084	0.301	7.64	G	G	N
LC 036G 08									1.750	44.45	4.01	0.072	0.341	8.65	J	J	P
LC 036G 09									2.000	50.80	3.49	0.062	0.380	9.66	J	J	P
LC 036G 10									2.250	57.15	3.09	0.055	0.420	10.67	J	J	P
LC 036G 11									2.500	63.50	2.77	0.049	0.460	11.68	K	K	R
LC 036G 12									2.750	69.85	2.51	0.045	0.499	12.69	K	K	R
LC 036G 13									3.000	76.20	2.30	0.041	0.539	13.69	K	K	R



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 038G 01	.480	12.19	.500	12.70	.038	.96	7.250	3.284	0.500	12.70	20.00	0.357	0.144	3.66	F	F	M
LC 038G 02									0.625	15.88	15.00	0.267	0.172	4.37	F	F	M
LC 038G 03									0.750	19.05	12.50	0.223	0.191	4.85	F	F	M
LC 038G 04									0.875	22.22	10.50	0.187	0.210	5.33	F	F	M
LC 038G 05									1.000	25.40	9.00	0.160	0.229	5.82	F	F	M
LC 038G 06									1.250	31.75	7.50	0.134	0.267	6.78	G	G	N
LC 038G 07									1.500	38.10	6.00	0.107	0.315	8.00	G	G	N
LC 038G 08									1.625	41.28	5.50	0.098	0.332	8.43	G	G	N
LC 038G 09									1.750	44.45	4.90	0.087	0.361	9.17	J	J	P
LC 038G 10									2.000	50.80	4.25	0.076	0.407	10.34	J	J	P
LC 038G 11									2.250	57.15	3.68	0.066	0.460	11.68	J	J	P
LC 038G 12									2.500	63.50	3.30	0.059	0.503	12.78	K	K	R
LC 038G 13									2.750	69.85	3.00	0.054	0.546	13.87	K	K	R
LC 038G 14									3.000	76.20	2.73	0.049	0.589	14.96	K	K	R
LC 042G 01	.480	12.19	.500	12.70	.042	1.07	9.500	4.302	0.500	12.70	28.00	0.499	0.169	4.29	F	F	M
LC 042G 02									0.625	15.88	22.00	0.392	0.201	5.10	F	F	M
LC 042G 03									0.750	19.05	18.00	0.321	0.222	5.64	F	F	M
LC 042G 04									0.875	22.22	15.00	0.267	0.248	6.30	F	F	M
LC 042G 05									1.000	25.40	13.00	0.232	0.274	6.96	F	F	M
LC 042G 06									1.250	31.75	10.00	0.178	0.327	8.30	G	G	N
LC 042G 07									1.500	38.10	8.50	0.152	0.379	9.63	G	G	N
LC 042G 08									1.625	41.28	7.70	0.137	0.400	10.16	G	G	N
LC 042G 09									1.750	44.45	6.90	0.123	0.438	11.12	G	G	N
LC 042G 10									2.000	50.80	6.00	0.107	0.490	12.45	G	G	N
LC 042G 11									2.250	57.15	5.50	0.098	0.504	12.80	J	J	P
LC 042G 12									2.500	63.50	5.00	0.089	0.562	14.27	K	K	R
LC 042G 13									2.750	69.85	4.53	0.081	0.610	15.49	K	K	R
LC 042G 14									3.000	76.20	4.13	0.074	0.659	16.74	L	L	S
LC 045G 01	.480	12.19	.500	12.70	.045	1.14	11.500	5.208	0.500	12.70	35.00	0.624	0.192	4.88	F	F	M
LC 045G 02									0.625	15.88	28.00	0.499	0.215	5.46	F	F	M
LC 045G 03									0.750	19.05	22.00	0.392	0.248	6.30	F	F	M
LC 045G 04									0.875	22.22	19.00	0.339	0.271	6.88	F	F	M
LC 045G 05									1.000	25.40	17.00	0.303	0.293	7.44	F	F	M
LC 045G 06									1.250	31.75	13.00	0.232	0.361	9.17	G	G	N
LC 045G 07									1.500	38.10	11.00	0.196	0.404	10.26	G	G	N
LC 045G 08									1.625	41.28	9.75	0.174	0.446	11.33	G	J	P
LC 045G 09									1.750	44.45	9.00	0.160	0.482	12.24	G	J	P
LC 045G 10									2.000	50.80	7.70	0.137	0.541	13.74	G	J	P
LC 045G 11									2.250	57.15	6.70	0.119	0.610	15.49	J	J	P
LC 045G 12									2.500	63.50	6.20	0.110	0.666	16.92	J	J	P
LC 045G 13									2.750	69.85	5.60	0.100	0.686	17.42	L	L	S
LC 045G 14									3.000	76.20	5.10	0.091	0.742	18.85	L	L	S

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 051G 01	.480	12.19	.500	12.70	.051	1.30	16.000	7.246	0.500	12.70	57.00	1.016	0.219	5.56	F	F	M
LC 051G 02									0.625	15.88	43.00	0.767	0.255	6.48	F	F	M
LC 051G 03									0.750	19.05	37.00	0.660	0.291	7.39	F	F	M
LC 051G 04									0.875	22.22	29.50	0.526	0.321	8.15	F	F	M
LC 051G 05									1.000	25.40	25.00	0.446	0.370	9.40	F	F	M
LC 051G 06									1.250	31.75	19.50	0.348	0.439	11.15	G	G	N
LC 051G 07									1.500	38.10	16.00	0.285	0.510	12.95	G	G	N
LC 051G 08									1.625	41.28	14.80	0.264	0.550	13.97	J	J	P
LC 051G 09									1.750	44.45	13.80	0.246	0.586	14.88	J	J	P
LC 051G 10									2.000	50.80	12.00	0.214	0.663	16.84	J	J	P
LC 051G 11									2.250	57.15	10.50	0.187	0.740	18.80	K	K	R
LC 051G 12									2.500	63.50	9.50	0.169	0.816	20.73	K	K	R
LC 051G 13									2.750	69.85	8.32	0.148	0.900	22.86	K	K	R
LC 051G 14									3.000	76.20	7.60	0.136	0.975	24.76	L	L	S
LC 055G 01	.480	12.19	.500	12.70	.055	1.40	20.000	9.058	0.500	12.70	72.00	1.284	0.249	6.32	F	G	N
LC 055G 02									0.625	15.88	56.00	0.999	0.290	7.37	F	G	N
LC 055G 03									0.750	19.05	47.00	0.838	0.317	8.05	F	G	N
LC 055G 04									0.875	22.22	38.00	0.678	0.373	9.47	F	G	N
LC 055G 05									1.000	25.40	35.00	0.624	0.400	10.16	F	G	N
LC 055G 06									1.250	31.75	27.00	0.481	0.482	12.24	G	J	P
LC 055G 07									1.500	38.10	22.00	0.392	0.565	14.35	G	J	P
LC 055G 08									1.625	41.28	20.00	0.357	0.605	15.37	J	K	R
LC 055G 09									1.750	44.45	18.00	0.321	0.660	16.76	J	K	R
LC 055G 10									2.000	50.80	16.00	0.285	0.720	18.29	J	K	R
LC 055G 11									2.250	57.15	14.20	0.253	0.835	21.21	J	K	R
LC 055G 12									2.500	63.50	12.50	0.223	0.927	23.54	J	K	R
LC 055G 13									2.750	69.85	10.90	0.194	1.022	25.95	K	L	S
LC 055G 14									3.000	76.20	9.96	0.178	1.107	28.12	L	M	T
LC 059G 01	.480	12.19	.500	12.70	.059	1.50	24.000	10.870	0.500	12.70	98.00	1.747	0.265	6.73	F	G	N
LC 059G 02									0.625	15.88	75.00	1.337	0.315	8.00	F	G	N
LC 059G 03									0.750	19.05	61.00	1.088	0.354	8.99	F	G	N
LC 059G 04									0.875	22.22	51.00	0.909	0.398	10.11	F	G	N
LC 059G 05									1.000	25.40	43.00	0.767	0.448	11.38	G	J	P
LC 059G 06									1.250	31.75	34.00	0.606	0.543	13.79	G	J	P
LC 059G 07									1.500	38.10	28.00	0.499	0.634	16.10	G	J	P
LC 059G 08									1.625	41.28	25.50	0.455	0.678	17.22	G	J	P
LC 059G 09									1.750	44.45	23.50	0.419	0.738	18.74	J	K	R
LC 059G 10									2.000	50.80	20.50	0.366	0.826	20.98	J	K	R
LC 059G 11									2.250	57.15	18.00	0.321	0.915	23.24	K	L	S
LC 059G 12									2.500	63.50	16.00	0.285	1.037	26.34	K	L	S
LC 059G 13									2.750	69.85	14.74	0.263	1.102	27.99	L	M	T
LC 059G 14									3.000	76.20	13.46	0.240	1.194	30.32	L	M	T



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 063G 01	.480	12.19	.500	12.70	.063	1.60	29.000	13.134	0.500	12.70	125.00	2.229	0.301	7.64	F	G	N
LC 063G 02									0.625	15.88	95.00	1.694	0.348	8.84	F	G	N
LC 063G 03									0.750	19.05	77.00	1.373	0.395	10.03	F	G	N
LC 063G 04									0.875	22.22	65.00	1.159	0.457	11.61	F	G	N
LC 063G 05									1.000	25.40	57.00	1.016	0.505	12.83	G	J	P
LC 063G 06									1.250	31.75	45.00	0.802	0.600	15.24	G	J	P
LC 063G 07									1.500	38.10	37.00	0.660	0.694	17.63	G	J	P
LC 063G 08									1.625	41.28	34.00	0.606	0.755	19.18	J	K	R
LC 063G 09									1.750	44.45	31.00	0.553	0.818	20.78	J	K	R
LC 063G 10									2.000	50.80	27.00	0.481	0.920	23.37	J	K	R
LC 063G 11									2.250	57.15	24.00	0.428	1.037	26.34	J	K	R
LC 063G 12									2.500	63.50	21.30	0.380	1.142	29.01	K	L	S
LC 063G 13									3.000	76.20	17.00	0.303	1.354	34.39	L	M	T
LC 067G 01	.480	12.19	.500	12.70	.067	1.70	36.500	16.560	0.500	12.70	179.00	3.179	0.305	7.75	G	J	P
LC 067G 02									0.625	15.88	133.00	2.375	0.361	9.17	G	J	P
LC 067G 03									0.750	19.05	106.00	1.893	0.416	10.57	G	J	P
LC 067G 04									0.875	22.23	88.10	1.573	0.471	11.96	G	J	P
LC 067G 05									1.000	25.40	75.40	1.346	0.526	13.36	J	K	R
LC 067G 06									1.250	31.75	58.50	1.045	0.635	16.13	J	K	R
LC 067G 07									1.500	38.10	47.80	0.854	0.746	18.95	J	K	R
LC 067G 08									1.750	44.45	40.40	0.721	0.856	21.74	L	M	T
LC 067G 09									2.000	50.80	35.00	0.625	0.966	24.54	L	M	T
LC 067G 10									2.250	57.15	30.80	0.550	1.078	27.38	M	N	U
LC 067G 11									2.500	63.50	27.60	0.493	1.186	30.12	N	P	W
LC 067G 12									2.750	69.85	25.00	0.446	1.294	32.87	P	R	X
LC 067G 13									3.000	76.20	22.80	0.407	1.405	35.69	P	R	X
LC 072G 01	.480	12.19	.500	12.70	.072	1.83	46.300	21.000	0.500	12.70	250.08	4.466	0.324	8.24	J	K	R
LC 072G 02									0.625	15.88	185.09	3.305	0.386	9.81	J	K	R
LC 072G 03									0.750	19.05	146.91	2.624	0.448	11.38	J	K	R
LC 072G 04									0.875	22.23	121.79	2.175	0.510	12.95	J	K	R
LC 072G 05									1.000	25.40	104.01	1.857	0.572	14.52	K	L	S
LC 072G 06									1.250	31.75	80.50	1.438	0.695	17.66	K	L	S
LC 072G 07									1.500	38.10	65.66	1.172	0.819	20.80	K	L	S
LC 072G 08									1.750	44.45	55.44	0.990	0.942	23.94	M	N	U
LC 072G 09									2.000	50.80	47.97	0.857	1.066	27.07	M	N	U
LC 072G 10									2.250	57.15	42.27	0.755	1.190	30.21	N	P	W
LC 072G 11									2.500	63.50	37.79	0.675	1.313	33.35	P	R	X
LC 072G 12									2.750	69.85	34.16	0.610	1.437	36.49	R	S	Y
LC 072G 13									3.000	76.20	31.17	0.557	1.560	39.63	R	S	Y
LC 072G 14									3.250	82.55	28.70	0.513	1.682	42.72	R	S	Y
LC 072G 15									3.500	88.90	26.50	0.473	1.809	45.96	R	S	Y

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 075G 01	.480	12.19	.500	12.70	.074	1.88	51.990	23.580	0.500	12.70	289.10	5.163	0.345	8.77	J	K	Special Order
LC 075G 02									0.625	15.88	215.60	3.850	0.410	10.43	J	K	
LC 075G 03									0.750	19.05	169.10	3.020	0.481	12.21	J	K	
LC 075G 04									0.875	22.23	139.00	2.482	0.552	14.01	J	K	
LC 075G 05									1.000	25.40	119.40	2.132	0.617	15.67	K	L	
LC 075G 06									1.250	31.75	92.30	1.648	0.752	19.11	K	L	
LC 075G 07									1.500	38.10	75.30	1.345	0.887	22.54	K	L	
LC 075G 08									1.750	44.45	63.50	1.134	1.024	26.00	M	N	
LC 075G 09									2.000	50.80	55.00	0.982	1.158	29.41	M	N	
LC 075G 10									2.250	57.15	48.40	0.864	1.295	32.89	N	P	
LC 075G 11									2.500	63.50	43.30	0.773	1.429	36.30	P	R	
LC 075G 12									2.750	69.85	39.10	0.698	1.566	39.78	R	S	
LC 075G 13									3.000	76.20	35.70	0.638	1.700	43.19	R	S	
LC 075G 14									3.250	82.55	32.80	0.586	1.837	46.66	R	S	
LC 075G 15									3.500	88.90	30.40	0.543	1.970	50.04	R	S	
LC 080G 01	.480	12.19	.500	12.70	.080	2.03	68.000	30.840	0.500	12.70	425.90	7.605	0.340	8.64	K	L	Special Order
LC 080G 02									0.625	15.88	311.40	5.561	0.407	10.33	K	L	
LC 080G 03									0.750	19.05	245.40	4.383	0.473	12.01	K	L	
LC 080G 04									0.875	22.23	202.50	3.617	0.539	13.70	K	L	
LC 080G 05									1.000	25.40	172.40	3.078	0.606	15.38	L	M	
LC 080G 06									1.250	31.75	132.80	2.372	0.738	18.75	L	M	
LC 080G 07									1.500	38.10	108.10	1.930	0.871	22.12	L	M	
LC 080G 08									1.750	44.45	91.10	1.626	1.003	25.48	N	P	
LC 080G 09									2.000	50.80	78.70	1.405	1.136	28.85	N	P	
LC 080G 10									2.250	57.15	69.30	1.237	1.269	32.22	P	R	
LC 080G 11									2.500	63.50	61.90	1.105	1.401	35.59	R	S	
LC 080G 12									2.750	69.85	55.90	0.998	1.534	38.96	S	T	
LC 080G 13									3.000	76.20	51.00	0.910	1.666	42.32	S	T	
LC 041GG 01	.500	12.70	.531	13.49	.041	1.04	5.557	2.521	0.500	12.70	17.83	0.319	0.188	4.78	F	F	M
LC 041GG 02									0.625	15.88	13.72	0.246	0.219	5.56	F	F	M
LC 041GG 03									0.750	19.05	11.16	0.200	0.250	6.35	F	F	M
LC 041GG 04									0.875	22.23	9.40	0.168	0.281	7.14	F	F	M
LC 041GG 05									1.000	25.40	8.12	0.145	0.313	7.95	F	F	M
LC 041GG 06									1.250	31.75	6.38	0.114	0.375	9.53	G	G	N
LC 041GG 07									1.500	38.10	5.26	0.094	0.437	11.10	G	G	N
LC 041GG 08									1.750	44.45	4.47	0.080	0.499	12.67	G	G	N
LC 041GG 09									2.000	50.80	3.89	0.070	0.561	14.25	G	G	N
LC 041GG 10									2.250	57.15	3.44	0.062	0.623	15.82	J	J	P
LC 041GG 11									2.500	63.50	3.08	0.055	0.685	17.40	K	K	R
LC 041GG 12									2.750	69.85	2.79	0.050	0.747	18.97	K	K	R
LC 041GG 13									3.000	76.20	2.55	0.046	0.809	20.55	L	L	S



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 062GG 01	.500	12.70	.531	13.49	.062	1.57	17.584	7.976	0.500	12.70	94.76	1.696	0.314	7.98	F	G	N
LC 062GG 02									0.625	15.88	71.07	1.272	0.376	9.55	F	G	N
LC 062GG 03									0.750	19.05	56.86	1.018	0.438	11.13	F	G	N
LC 062GG 04									0.875	22.23	47.38	0.848	0.500	12.70	F	G	N
LC 062GG 05									1.000	25.40	40.61	0.727	0.562	14.27	G	J	P
LC 062GG 06									1.250	31.75	31.59	0.565	0.686	17.42	G	J	P
LC 062GG 07									1.500	38.10	25.84	0.463	0.810	20.57	G	J	P
LC 062GG 08									1.750	44.45	21.87	0.391	0.933	23.70	J	K	R
LC 062GG 09									2.000	50.80	18.95	0.339	1.057	26.85	J	K	R
LC 062GG 10									2.250	57.15	16.72	0.299	1.181	30.00	J	K	R
LC 062GG 11									2.500	63.50	14.96	0.268	1.305	33.15	J	K	R
LC 062GG 12									2.750	69.85	13.54	0.242	1.429	36.30	K	L	S
LC 062GG 13									3.000	76.20	12.36	0.221	1.552	39.42	L	M	T
LC 072GG 01	.500	12.70	.531	13.49	.072	1.83	32.331	14.665	0.500	12.70	200.36	3.586	0.339	8.61	J	K	R
LC 072GG 02									0.625	15.88	148.29	2.654	0.405	10.29	J	K	R
LC 072GG 03									0.750	19.05	117.70	2.107	0.472	11.99	J	K	R
LC 072GG 04									0.875	22.23	97.57	1.747	0.539	13.69	J	K	R
LC 072GG 05									1.000	25.40	83.33	1.492	0.606	15.39	K	L	S
LC 072GG 06									1.250	31.75	64.49	1.154	0.740	18.80	K	L	S
LC 072GG 07									1.500	38.10	52.60	0.942	0.873	22.17	K	L	S
LC 072GG 08									1.750	44.45	44.41	0.795	1.007	25.58	M	N	U
LC 072GG 09									2.000	50.80	38.43	0.688	1.140	28.96	M	N	U
LC 072GG 10									2.250	57.15	33.87	0.606	1.274	32.36	N	P	W
LC 072GG 11									2.500	63.50	30.27	0.542	1.408	35.76	P	R	X
LC 072GG 12									2.750	69.85	27.37	0.490	1.541	39.14	R	S	Y
LC 072GG 13									3.000	76.20	24.97	0.447	1.675	42.55	R	S	Y
LC 072GG 14									3.250	82.55	22.96	0.411	1.809	45.95	R	S	Y
LC 072GG 15									3.500	88.90	21.25	0.380	1.942	49.33	R	S	Y
LC 041GH 01	.540	13.716	.562	14.28	.041	1.04	7.500	3.390	0.500	12.70	21.00	0.375	0.155	3.93	F	G	N
LC 041GH 02									0.625	15.88	16.30	0.291	0.177	4.51	F	G	N
LC 041GH 03									0.750	19.05	13.30	0.237	0.197	5.01	F	G	N
LC 041GH 04									0.875	22.23	11.20	0.200	0.217	5.51	F	G	N
LC 041GH 05									1.000	25.40	9.66	0.172	0.237	6.01	F	G	N
LC 041GH 06									1.250	31.75	7.59	0.135	0.276	7.01	G	J	P
LC 041GH 07									1.500	38.10	6.25	0.112	0.315	8.01	G	J	P
LC 041GH 08									1.750	44.45	5.32	0.095	0.355	9.02	G	J	P
LC 041GH 09									2.000	50.80	4.62	0.082	0.395	10.02	G	J	P
LC 041GH 10									2.250	57.15	4.09	0.073	0.434	11.02	G	J	P
LC 041GH 11									2.500	63.50	3.67	0.066	0.473	12.02	G	J	P
LC 041GH 12									2.750	69.85	3.32	0.059	0.513	13.02	G	J	P
LC 041GH 13									3.000	76.20	3.04	0.054	0.552	14.02	G	J	P

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 046GH 01	.540	13.716	.562	14.28	.046	1.17	10.000	4.540	0.500	12.70	31.00	0.554	0.181	4.60	F	G	N
LC 046GH 02									0.625	15.88	24.00	0.429	0.208	5.30	F	G	N
LC 046GH 03									0.750	19.05	19.50	0.348	0.233	5.93	F	G	N
LC 046GH 04									0.875	22.23	16.40	0.292	0.258	6.56	F	G	N
LC 046GH 05									1.000	25.40	14.10	0.252	0.283	7.20	F	G	N
LC 046GH 06									1.250	31.75	11.07	0.198	0.333	8.47	G	J	P
LC 046GH 07									1.500	38.10	9.10	0.162	0.383	9.74	G	J	P
LC 046GH 08									1.750	44.45	7.73	0.138	0.433	11.01	J	K	R
LC 046GH 09									2.000	50.80	6.72	0.120	0.483	12.28	J	K	R
LC 046GH 10									2.250	57.15	5.94	0.106	0.533	13.55	J	K	R
LC 046GH 11									2.500	63.50	5.32	0.095	0.583	14.82	J	K	R
LC 046GH 12									2.750	69.85	4.82	0.086	0.633	16.09	K	L	S
LC 046GH 13									3.000	76.20	4.41	0.079	0.683	17.36	K	L	S
LC 054GH 01	.540	13.716	.562	14.28	.054	1.37	16.000	7.260	0.500	12.70	57.30	1.020	0.223	5.66	F	G	N
LC 054GH 02									0.625	15.88	43.40	0.775	0.256	6.51	F	G	N
LC 054GH 03									0.750	19.05	35.00	0.625	0.290	7.36	F	G	N
LC 054GH 04									0.875	22.23	29.30	0.523	0.323	8.21	F	G	N
LC 054GH 05									1.000	25.40	25.20	0.450	0.356	9.05	F	G	N
LC 054GH 06									1.250	31.75	19.70	0.351	0.423	10.75	G	J	P
LC 054GH 07									1.500	38.10	16.10	0.288	0.490	12.45	G	J	P
LC 054GH 08									1.750	44.45	13.70	0.244	0.557	14.15	J	K	R
LC 054GH 09									2.000	50.80	11.90	0.212	0.624	15.84	J	K	R
LC 054GH 10									2.250	57.15	10.50	0.187	0.691	17.54	J	K	R
LC 054GH 11									2.500	63.50	9.40	0.168	0.757	19.24	J	K	R
LC 054GH 12									2.750	69.85	8.50	0.152	0.824	20.94	K	L	S
LC 054GH 13									3.000	76.20	7.76	0.139	0.891	22.63	K	L	S
LC 058GH 01	.540	13.716	.562	14.28	.058	1.47	20.000	9.100	0.500	12.70	75.80	1.353	0.242	6.15	F	G	N
LC 058GH 02									0.625	15.88	57.20	1.021	0.280	7.11	F	G	N
LC 058GH 03									0.750	19.05	45.90	0.820	0.318	8.07	F	G	N
LC 058GH 04									0.875	22.23	38.40	0.685	0.355	9.02	F	G	N
LC 058GH 05									1.000	25.40	33.00	0.588	0.393	10.00	G	J	P
LC 058GH 06									1.250	31.75	25.70	0.459	0.469	11.90	G	J	P
LC 058GH 07									1.500	38.10	21.00	0.375	0.544	13.82	G	J	P
LC 058GH 08									1.750	44.45	17.80	0.318	0.620	15.74	J	K	R
LC 058GH 09									2.000	50.80	15.50	0.276	0.695	17.66	J	K	R
LC 058GH 10									2.250	57.15	13.70	0.244	0.771	19.58	J	K	R
LC 058GH 11									2.500	63.50	12.20	0.218	0.846	21.50	J	K	R
LC 058GH 12									2.750	69.85	11.00	0.197	0.922	23.41	L	M	T
LC 058GH 13									3.000	76.20	10.10	0.180	0.997	25.33	L	M	T



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 063GH 01	.540	13.716	.562	14.28	.063	1.60	25.000	11.340	0.500	12.70	105.40	1.880	0.266	6.76	F	J	P
LC 063GH 02									0.625	15.88	79.00	1.410	0.310	7.87	F	J	P
LC 063GH 03									0.750	19.05	63.20	1.130	0.353	8.97	F	J	P
LC 063GH 04									0.875	22.23	52.60	0.939	0.397	10.08	F	J	P
LC 063GH 05									1.000	25.40	45.10	0.805	0.440	11.18	G	K	R
LC 063GH 06									1.250	31.75	35.10	0.626	0.527	13.39	G	K	R
LC 063GH 07									1.500	38.10	28.70	0.512	0.614	15.60	G	K	R
LC 063GH 08									1.750	44.45	24.30	0.433	0.701	17.81	J	L	S
LC 063GH 09									2.000	50.80	21.00	0.375	0.788	20.02	J	L	S
LC 063GH 10									2.250	57.15	18.60	0.331	0.875	22.23	J	L	S
LC 063GH 11									2.500	63.50	16.60	0.296	0.962	24.44	J	L	S
LC 063GH 12									2.750	69.85	15.00	0.268	1.049	26.65	L	N	U
LC 063GH 13									3.000	76.20	13.70	0.245	1.136	28.86	L	N	U
LC 067GH 01	.540	13.716	.562	14.28	.067	1.70	30.000	13.610	0.500	12.70	137.00	2.440	0.284	7.22	F	J	P
LC 067GH 02									0.625	15.88	102.00	1.820	0.332	8.43	F	J	P
LC 067GH 03									0.750	19.05	81.20	1.450	0.380	9.65	G	K	R
LC 067GH 04									0.875	22.23	67.50	1.200	0.428	10.86	G	K	R
LC 067GH 05									1.000	25.40	57.70	1.030	0.476	12.08	G	K	R
LC 067GH 06									1.250	31.75	44.80	0.780	0.571	14.51	G	K	R
LC 067GH 07									1.500	38.10	36.60	0.653	0.667	16.94	G	K	R
LC 067GH 08									1.750	44.45	31.00	0.552	0.763	19.37	G	K	R
LC 067GH 09									2.000	50.80	26.80	0.478	0.858	21.80	K	K	R
LC 067GH 10									2.250	57.15	23.60	0.422	0.954	24.23	K	M	T
LC 067GH 11									2.500	63.50	21.10	0.377	1.050	26.67	K	M	T
LC 067GH 12									2.750	69.85	19.10	0.341	1.146	29.10	L	N	U
LC 067GH 13									3.000	76.20	17.50	0.311	1.241	31.53	L	N	U
LC 054GJ 01	.563	14.30	.594	15.09	.054	1.37	11.143	5.054	0.625	15.88	32.16	0.576	0.279	7.09	F	G	N
LC 054GJ 02									0.750	19.05	25.90	0.464	0.319	8.10	F	G	N
LC 054GJ 03									0.875	22.23	21.68	0.388	0.359	9.12	F	G	N
LC 054GJ 04									1.000	25.40	18.64	0.334	0.400	10.16	F	G	N
LC 054GJ 05									1.250	31.75	14.56	0.261	0.481	12.22	G	J	P
LC 054GJ 06									1.500	38.10	11.95	0.214	0.562	14.27	G	J	P
LC 054GJ 07									1.750	44.45	10.13	0.181	0.642	16.31	J	K	R
LC 054GJ 08									2.000	50.80	8.79	0.157	0.723	18.36	J	K	R
LC 054GJ 09									2.250	57.15	7.76	0.139	0.804	20.42	J	K	R
LC 054GJ 10									2.500	63.50	6.95	0.124	0.885	22.48	J	K	R
LC 054GJ 11									3.000	76.20	5.75	0.103	1.047	26.59	K	L	S
LC 054GJ 12									3.250	82.55	5.29	0.095	1.128	28.65	K	L	S
LC 054GJ 13									3.500	88.90	4.90	0.088	1.209	30.71	L	M	T
LC 054GJ 14									3.750	95.25	4.57	0.082	1.290	32.77	L	M	T
LC 054GJ 15									4.000	101.60	4.27	0.076	1.370	34.80	L	M	T

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 091GJ 01	.563	14.30	.594	15.88	.092	2.31	82.267	37.316	0.625	15.88	397.57	7.117	0.418	10.62	L	P	Special Order
LC 091GJ 02									0.750	19.05	310.08	5.550	0.483	12.27	L	P	
LC 091GJ 03									0.875	22.23	254.15	4.549	0.548	13.92	L	R	
LC 091GJ 04									1.000	25.40	215.31	3.854	0.613	15.57	M	R	
LC 091GJ 05									1.250	31.75	164.91	2.952	0.743	18.87	M	S	
LC 091GJ 06									1.500	38.10	133.63	2.392	0.874	22.20	M	T	
LC 091GJ 07									1.750	44.45	112.33	2.011	1.004	25.50	N	T	
LC 091GJ 08									2.000	50.80	96.88	1.734	1.134	28.80	N	U	
LC 091GJ 09									2.250	57.15	85.17	1.524	1.264	32.11	N	U	
LC 091GJ 10									2.500	63.50	75.98	1.360	1.394	35.41	P	W	
LC 091GJ 11									3.000	76.20	62.50	1.119	1.654	42.01	P	X	
LC 091GJ 12									3.250	82.55	57.41	1.028	1.785	45.34	P	Y	
LC 091GJ 13									3.500	88.90	53.08	0.950	1.915	48.64	R	Y	
LC 091GJ 14									3.750	95.25	49.36	0.884	2.045	51.94	R	Z	
LC 091GJ 15									4.000	101.60	46.13	0.826	2.175	55.25	R	Z	
LC 045H 0	.600	15.24	.625	15.88	.045	1.14	7.500	3.397	0.500	12.70	21.70	0.388	0.170	4.32	F	G	N
LC 045H 01									0.625	15.88	18.00	0.321	0.181	4.60	F	G	N
LC 045H 02									0.750	19.05	15.00	0.267	0.204	5.18	F	G	N
LC 045H 03									0.875	22.22	12.00	0.214	0.226	5.74	F	G	N
LC 045H 04									1.000	25.40	10.50	0.187	0.249	6.32	F	G	N
LC 045H 05									1.250	31.75	8.00	0.143	0.294	7.47	G	J	P
LC 045H 06									1.500	38.10	6.50	0.116	0.350	8.89	G	J	P
LC 045H 07									1.750	44.45	5.50	0.098	0.387	9.83	G	J	P
LC 045H 08									2.000	50.80	4.75	0.085	0.443	11.00	G	J	P
LC 045H 09									2.250	57.15	4.20	0.075	0.486	12.34	G	J	P
LC 045H 10									2.500	63.50	3.75	0.067	0.532	13.51	G	J	P
LC 045H 11									2.750	69.85	3.40	0.061	0.576	14.63	G	J	P
LC 045H 12									3.000	76.20	3.10	0.055	0.622	15.80	G	J	P
LC 045H 13									3.250	82.55	2.86	0.051	0.667	16.94	L	M	T
LC 045H 14									3.500	88.90	2.65	0.047	0.711	18.06	L	M	T
LC 049H 01	.600	15.24	.625	15.88	.049	1.24	12.000	5.435	0.625	15.88	28.00	0.499	0.200	5.08	F	G	N
LC 049H 02									0.750	19.05	23.00	0.410	0.221	5.61	F	G	N
LC 049H 03									0.875	22.22	19.00	0.339	0.245	6.22	F	G	N
LC 049H 04									1.000	25.40	16.00	0.285	0.270	6.86	F	G	N
LC 049H 05									1.250	31.75	13.00	0.232	0.304	7.72	G	J	P
LC 049H 06									1.500	38.10	10.00	0.178	0.368	9.35	G	J	P
LC 049H 07									1.750	44.45	8.50	0.152	0.417	10.59	J	K	R
LC 049H 08									2.000	50.80	7.50	0.134	0.451	11.46	J	K	R
LC 049H 09									2.250	57.15	6.50	0.116	0.500	12.70	J	K	R
LC 049H 10									2.500	63.50	5.75	0.102	0.550	13.97	J	K	R
LC 049H 11									2.750	69.85	5.08	0.091	0.606	15.39	K	L	S
LC 049H 12									3.000	76.20	4.64	0.083	0.654	16.61	K	L	S



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 055H 01	.600	15.24	.625	15.88	.055	1.40	16.250	7.360	0.625	15.88	40.00	0.713	0.228	5.79	F	G	N
LC 055H 02									0.750	19.05	33.00	0.588	0.249	6.32	F	G	N
LC 055H 03									0.875	22.22	27.00	0.481	0.290	7.37	F	G	N
LC 055H 04									1.000	25.40	24.00	0.428	0.317	8.05	F	G	N
LC 055H 05									1.250	31.75	19.00	0.339	0.359	9.12	G	J	P
LC 055H 06									1.500	38.10	15.00	0.267	0.427	10.84	G	J	P
LC 055H 07									1.750	44.45	12.75	0.227	0.478	12.14	J	K	R
LC 055H 08									2.000	50.80	11.00	0.196	0.542	13.77	J	K	R
LC 055H 09									2.250	57.15	9.75	0.174	0.599	15.21	J	K	R
LC 055H 10									2.500	63.50	8.90	0.159	0.657	16.69	J	K	R
LC 055H 11									2.750	69.85	7.73	0.138	0.725	18.41	K	L	S
LC 055H 12									3.000	76.20	7.08	0.126	0.780	19.81	K	L	S
LC 059H 01	.600	15.24	.625	15.88	.059	1.50	19.500	8.832	0.625	15.88	53.00	0.945	0.258	6.55	F	G	N
LC 059H 02									0.750	19.05	42.00	0.749	0.288	7.32	F	G	N
LC 059H 03									0.875	22.22	35.00	0.624	0.317	8.05	F	G	N
LC 059H 04									1.000	25.40	30.00	0.535	0.352	8.94	G	J	P
LC 059H 05									1.250	31.75	24.00	0.428	0.425	10.80	G	J	P
LC 059H 06									1.500	38.10	19.00	0.339	0.482	12.24	G	J	P
LC 059H 07									1.750	44.45	16.00	0.285	0.556	14.12	J	K	R
LC 059H 08									2.000	50.80	14.00	0.250	0.615	15.62	J	K	R
LC 059H 09									2.250	57.15	12.50	0.223	0.705	17.91	J	K	R
LC 059H 10									2.500	63.50	11.25	0.200	0.777	19.74	J	K	R
LC 059H 11									2.750	69.85	9.30	0.166	0.857	21.77	L	M	T
LC 059H 12									3.000	76.20	8.50	0.152	0.924	23.47	L	M	T
LC 063H 01	.600	15.24	.625	15.88	.063	1.60	23.000	10.417	0.625	15.88	64.00	1.141	0.285	7.24	F	J	P
LC 063H 02									0.750	19.05	53.00	0.945	0.316	8.03	F	J	P
LC 063H 03									0.875	22.22	45.00	0.802	0.347	8.81	F	J	P
LC 063H 04									1.000	25.40	38.00	0.678	0.379	9.63	G	K	R
LC 063H 05									1.250	31.75	30.00	0.535	0.457	11.61	G	K	R
LC 063H 06									1.500	38.10	24.00	0.428	0.552	14.02	G	K	R
LC 063H 07									1.750	44.45	20.00	0.357	0.619	15.72	J	L	S
LC 063H 08									2.000	50.80	17.50	0.312	0.692	17.58	J	L	S
LC 063H 09									2.250	57.15	15.50	0.276	0.761	19.33	J	L	S
LC 063H 10									2.500	63.50	14.00	0.250	0.842	21.39	J	L	S
LC 063H 11									2.750	69.85	12.17	0.217	0.927	23.45	L	N	U
LC 063H 12									3.000	76.20	11.11	0.198	1.002	25.45	L	N	U
LC 063H 13									3.250	82.55	10.20	0.182	1.077	27.36	M	P	W
LC 063H 14									3.500	88.90	9.50	0.170	1.153	29.29	M	P	W

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 067H 01	.600	15.24	.625	15.88	.067	1.70	26.000	11.775	0.625	15.88	80.00	1.426	0.302	7.67	F	J	P
LC 067H 02									0.750	19.05	63.00	1.123	0.361	9.17	G	K	R
LC 067H 03									0.875	22.22	50.00	0.892	0.403	10.24	G	K	R
LC 067H 04									1.000	25.40	45.00	0.802	0.436	11.07	G	K	R
LC 067H 05									1.250	31.75	34.00	0.606	0.537	13.64	G	K	R
LC 067H 06									1.500	38.10	29.00	0.517	0.605	15.37	G	K	R
LC 067H 07									1.750	44.45	24.00	0.428	0.705	17.91	G	K	R
LC 067H 08									2.000	50.80	19.50	0.348	0.842	21.39	K	M	T
LC 067H 09									2.250	57.15	17.00	0.303	0.944	23.98	K	M	T
LC 067H 10									2.500	63.50	15.00	0.267	1.057	26.85	K	M	T
LC 067H 11									2.750	69.85	13.40	0.239	1.143	29.03	L	N	U
LC 067H 12									3.000	76.20	12.20	0.218	1.241	31.52	L	N	U
LC 072H 0	.600	15.24	.625	15.88	.072	1.83	30.000	13.587	0.625	15.88	103.00	1.839	0.346	8.79	G	K	R
LC 072H 01									0.750	19.05	78.00	1.391	0.397	10.08	G	K	R
LC 072H 02									0.875	22.22	68.00	1.212	0.432	10.97	G	K	R
LC 072H 03									1.000	25.40	55.00	0.981	0.506	12.85	G	K	R
LC 072H 04									1.250	31.75	45.00	0.802	0.596	15.14	G	K	R
LC 072H 05									1.500	38.10	36.00	0.642	0.686	17.42	J	L	S
LC 072H 06									1.750	44.45	30.00	0.535	0.795	20.19	J	L	S
LC 072H 07									2.000	50.80	26.00	0.464	0.939	23.85	K	M	T
LC 072H 08									2.250	57.15	23.50	0.419	0.994	25.25	K	M	T
LC 072H 09									2.500	63.50	21.00	0.374	1.085	27.56	K	M	T
LC 072H 10									2.750	69.85	19.00	0.339	1.180	29.97	L	N	U
LC 072H 11									3.000	76.20	17.00	0.303	1.280	32.51	M	P	W
LC 080H 01	.600	15.24	.625	15.88	.080	2.03	55.000	24.950	0.625	15.88	193.40	3.455	0.351	8.91	G	K	Special Order
LC 080H 02									0.750	19.05	152.50	2.723	0.401	10.18	G	K	
LC 080H 03									0.875	22.23	125.80	2.247	0.451	11.46	G	K	
LC 080H 04									1.000	25.40	107.10	1.912	0.501	12.73	G	K	
LC 080H 05									1.250	31.75	82.50	1.474	0.601	15.27	J	L	
LC 080H 06									1.500	38.10	67.10	1.199	0.701	17.81	J	L	
LC 080H 07									1.750	44.45	56.60	1.010	0.801	20.35	K	M	
LC 080H 08									2.000	50.80	48.90	0.873	0.901	22.89	K	M	
LC 080H 09									2.250	57.15	43.00	0.769	1.001	25.43	K	M	
LC 080H 10									2.500	63.50	38.40	0.686	1.101	27.98	K	M	
LC 080H 11									2.750	69.85	34.70	0.620	1.202	30.52	M	P	
LC 080H 12									3.000	76.20	31.70	0.566	1.302	33.06	M	P	



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 085H 01	.600	15.24	.625	15.88	.085	2.16	65.350	29.640	0.625	15.88	250.72	4.477	0.375	9.53	J	K	Special Order
LC 085H 02									0.750	19.05	196.68	3.512	0.430	10.93	J	K	
LC 085H 03									0.875	22.23	161.81	2.890	0.485	12.33	J	K	
LC 085H 04									1.000	25.40	137.44	2.454	0.540	13.72	J	K	
LC 085H 05									1.250	31.75	105.63	1.886	0.650	16.52	K	L	
LC 085H 06									1.500	38.10	85.77	1.532	0.760	19.31	K	L	
LC 085H 07									1.750	44.45	72.20	1.289	0.870	22.10	L	M	
LC 085H 08									2.000	50.80	62.34	1.113	0.980	24.90	L	M	
LC 085H 09									2.250	57.15	54.84	0.979	1.090	27.69	L	M	
LC 085H 10									2.500	63.50	48.96	0.874	1.200	30.48	L	M	
LC 085H 11									2.750	69.85	44.22	0.790	1.310	33.28	N	P	
LC 085H 12									3.000	76.20	40.31	0.720	1.420	36.07	N	P	
LC 085H 13									3.250	82.55	37.00	0.661	1.532	38.90	N	P	
LC 085H 14									3.500	88.90	34.25	0.612	1.640	41.67	N	P	
LC 092H 01	.600	15.24	.625	15.88	.092	2.340	89.350	40.530	0.625	15.88	373.60	6.672	0.397	10.09	K	L	Special Order
LC 092H 02									0.750	19.05	291.09	5.198	0.456	11.59	K	L	
LC 092H 03									0.875	22.23	238.43	4.258	0.515	13.09	K	L	
LC 092H 04									1.000	25.40	201.91	3.606	0.574	14.59	K	L	
LC 092H 05									1.250	31.75	154.56	2.760	0.692	17.58	L	M	
LC 092H 06									1.500	38.10	125.20	2.236	0.810	20.57	L	M	
LC 092H 07									1.750	44.45	105.21	1.879	0.928	23.57	M	N	
LC 092H 08									2.000	50.80	90.73	1.620	1.046	26.56	M	N	
LC 092H 09									2.250	57.15	79.75	1.424	1.164	29.55	M	N	
LC 092H 10									2.500	63.50	71.14	1.270	1.281	32.55	M	N	
LC 092H 11									2.750	69.85	64.21	1.147	1.399	35.54	P	R	
LC 092H 12									3.000	76.20	58.51	1.045	1.517	38.53	P	R	
LC 092H 13									3.250	82.55	53.80	0.961	1.633	41.49	P	R	
LC 092H 14									3.500	88.90	49.70	0.888	1.752	44.51	P	R	
LC 092H 15									3.750	95.25	46.30	0.827	1.867	47.43	P	R	
LC 092H 16									4.000	101.60	43.20	0.771	1.988	50.48	P	R	
LC 098H 01	.600	15.24	.625	15.88	.098	2.490	103.900	47.120	0.750	19.05	387.80	6.925	0.487	12.36	K	L	Special Order
LC 098H 02									0.875	22.23	314.10	5.609	0.553	14.05	K	L	
LC 098H 03									1.000	25.40	267.20	4.772	0.615	15.62	K	L	
LC 098H 04									1.250	31.75	203.90	3.641	0.743	18.88	L	M	
LC 098H 05									1.500	38.10	164.80	2.943	0.872	22.14	L	M	
LC 098H 06									1.750	44.45	138.30	2.470	1.000	25.40	M	N	
LC 098H 07									2.000	50.80	119.10	2.127	1.129	28.67	M	N	
LC 098H 08									2.250	57.15	104.60	1.868	1.257	31.93	M	N	
LC 098H 09									2.500	63.50	93.30	1.666	1.385	35.18	M	N	
LC 098H 10									2.750	69.85	84.10	1.502	1.515	38.47	P	R	
LC 098H 11									3.000	76.20	76.60	1.368	1.643	41.73	P	R	
LC 098H 12									3.250	82.55	70.40	1.257	1.770	44.96	P	R	
LC 098H 13									3.500	88.90	65.00	1.161	1.900	48.27	P	R	
LC 098H 14									3.750	95.25	60.50	1.080	2.027	51.48	P	R	
LC 098H 15									4.000	101.60	56.50	1.009	2.156	54.76	P	R	

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 120HH 01	.625	15.88	.656	17.48	.120	3.05	124.175	56.326	0.875	22.23	653.47	11.697	0.685	17.40	N	U	Special Order
LC 120HH 02									1.000	25.40	545.99	9.773	0.771	19.58	P	W	
LC 120HH 03									1.250	31.75	410.85	7.354	0.944	23.98	P	X	
LC 120HH 04									1.500	38.10	329.33	5.895	1.116	28.35	R	Y	
LC 120HH 05									1.750	44.45	274.80	4.919	1.288	32.72	S	Z	
LC 120HH 06									2.000	50.80	235.77	4.220	1.461	37.11	T	AA	
LC 120HH 07									2.250	57.15	206.44	3.695	1.633	41.48	T	AB	
LC 120HH 08									2.500	63.50	183.61	3.287	1.805	45.85	U	AC	
LC 120HH 09									2.750	69.85	165.32	2.959	1.978	50.24	U	AD	
LC 120HH 10									3.000	76.20	150.35	2.691	2.150	54.61	W	AE	
LC 120HH 11									3.250	82.55	137.86	2.468	2.322	58.98	W	AG	
LC 120HH 12									3.500	88.90	127.29	2.278	2.495	63.37	X	AJ	
LC 120HH 13									4.000	101.60	110.36	1.975	2.839	72.11	Y	AK	
LC 049HJ 01	.660	16.76	.687	17.45	.049	1.245	10.000	4.530	0.625	15.88	23.33	0.417	0.182	4.62	F	J	P
LC 049HJ 02									0.750	19.05	18.20	0.325	0.210	5.34	G	K	R
LC 049HJ 03									0.875	22.23	15.30	0.273	0.230	5.83	G	K	R
LC 049HJ 04									1.000	25.40	13.20	0.235	0.249	6.33	G	K	R
LC 049HJ 05									1.250	31.75	10.30	0.184	0.288	7.32	G	K	R
LC 049HJ 06									1.500	38.10	8.50	0.151	0.328	8.32	G	K	R
LC 049HJ 07									1.750	44.45	7.20	0.128	0.367	9.31	G	K	R
LC 049HJ 08									2.000	50.80	6.25	0.112	0.406	10.31	K	M	T
LC 049HJ 09									2.250	57.15	5.50	0.098	0.445	11.30	K	M	T
LC 049HJ 10									2.500	63.50	4.95	0.088	0.484	12.30	K	M	T
LC 049HJ 11									2.750	69.85	4.50	0.080	0.523	13.29	L	N	U
LC 049HJ 12									3.000	76.20	4.10	0.073	0.562	14.28	L	N	U
LC 055HJ 01	.660	16.76	.687	17.45	.055	1.397	15.000	6.800	0.625	15.88	36.00	0.643	0.210	5.34	J	L	S
LC 055HJ 02									0.750	19.05	28.90	0.515	0.238	6.05	J	L	S
LC 055HJ 03									0.875	22.23	24.10	0.431	0.261	6.63	J	L	S
LC 055HJ 04									1.000	25.40	20.80	0.371	0.284	7.22	J	L	S
LC 055HJ 05									1.250	31.75	16.20	0.289	0.330	8.39	J	L	S
LC 055HJ 06									1.500	38.10	13.30	0.237	0.377	9.56	J	L	S
LC 055HJ 07									1.750	44.45	11.30	0.201	0.423	10.74	K	M	T
LC 055HJ 08									2.000	50.80	9.80	0.175	0.469	11.91	K	M	T
LC 055HJ 09									2.250	57.15	8.60	0.154	0.515	13.08	K	M	T
LC 055HJ 10									2.500	63.50	7.75	0.138	0.561	14.25	K	M	T
LC 055HJ 11									2.750	69.85	7.00	0.125	0.607	15.42	K	M	T
LC 055HJ 12									3.000	76.20	6.40	0.114	0.653	16.60	K	M	T



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
															M	S	S316
LC 063HJ 01									0.625	15.88	55.60	0.993	0.262	6.65	J	L	
LC 063HJ 02									0.750	19.05	44.50	0.794	0.293	7.45	J	L	
LC 063HJ 03									0.875	22.23	37.10	0.662	0.325	8.25	J	L	
LC 063HJ 04									1.000	25.40	31.80	0.567	0.356	9.05	J	L	
LC 063HJ 05									1.250	31.75	24.70	0.441	0.419	10.65	K	M	
LC 063HJ 06	.660	16.76	.687	17.45	.063	1.600	20.000	9.070	1.500	38.10	20.20	0.361	0.482	12.25	K	M	Special Order
LC 063HJ 07									1.750	44.45	17.10	0.305	0.545	13.85	K	M	
LC 063HJ 08									2.000	50.80	14.80	0.265	0.608	15.45	K	M	
LC 063HJ 09									2.250	57.15	13.10	0.233	0.671	17.05	L	N	
LC 063HJ 10									2.500	63.50	11.70	0.209	0.734	18.65	L	N	
LC 063HJ 11									2.750	69.85	10.60	0.189	0.797	20.25	L	N	
LC 063HJ 12									3.000	76.20	9.70	0.173	0.860	21.85	L	N	
LC 067HJ 01									0.625	15.88	70.70	1.262	0.281	7.15	J	L	
LC 067HJ 02									0.750	19.05	56.40	1.006	0.316	8.03	J	L	
LC 067HJ 03									0.875	22.23	46.90	0.837	0.351	8.92	J	L	
LC 067HJ 04									1.000	25.40	40.10	0.716	0.386	9.81	J	L	
LC 067HJ 05									1.250	31.75	31.10	0.555	0.456	11.59	K	M	
LC 067HJ 06	.660	16.76	.687	17.45	.067	1.702	25.000	11.340	1.500	38.10	25.50	0.454	0.526	13.36	K	M	Special Order
LC 067HJ 07									1.750	44.45	21.50	0.384	0.596	15.14	K	M	
LC 067HJ 08									2.000	50.80	18.60	0.332	0.666	16.92	K	M	
LC 067HJ 09									2.250	57.15	16.50	0.293	0.736	18.69	L	N	
LC 067HJ 10									2.500	63.50	14.70	0.262	0.806	20.47	L	N	
LC 067HJ 11									2.750	69.85	13.30	0.237	0.876	22.25	L	N	
LC 067HJ 12									3.000	76.20	12.10	0.216	0.946	24.02	L	N	
LC 072HJ 01									0.625	15.88	94.10	1.680	0.306	7.76	J	M	T
LC 072HJ 02									0.750	19.05	74.70	1.333	0.345	8.77	J	M	T
LC 072HJ 03									0.875	22.23	62.00	1.106	0.385	9.77	J	M	T
LC 072HJ 04									1.000	25.40	53.00	0.944	0.424	10.77	J	M	T
LC 072HJ 05									1.250	31.75	41.00	0.731	0.503	12.77	K	N	U
LC 072HJ 06	.660	16.76	.687	17.45	.072	1.829	30.000	13.610	1.500	38.10	33.50	0.596	0.582	14.77	K	N	U
LC 072HJ 07									1.750	44.45	28.20	0.503	0.661	16.78	K	N	U
LC 072HJ 08									2.000	50.80	24.50	0.436	0.739	18.78	K	N	U
LC 072HJ 09									2.250	57.15	21.50	0.384	0.818	20.78	M	R	X
LC 072HJ 10									2.500	63.50	19.20	0.343	0.897	22.78	M	R	X
LC 072HJ 11									2.750	69.85	17.50	0.310	0.976	24.79	M	R	X
LC 072HJ 12									3.000	76.20	15.90	0.283	1.055	27.79	M	R	X

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
															M	S	S316
LC 105HK 01	.688	17.46	.720	19.05	.105	2.67	88.549	40.166	0.875	22.23	279.21	4.998	0.558	14.17	N	R	Special Order
LC 105HK 02									1.000	25.40	235.03	4.207	0.622	15.80	N	R	
LC 105HK 03									1.250	31.75	178.53	3.196	0.750	19.05	N	R	
LC 105HK 04									1.500	38.10	143.93	2.576	0.879	22.33	N	S	
LC 105HK 05									1.750	44.45	120.57	2.158	1.007	25.58	P	T	
LC 105HK 06									2.000	50.80	103.73	1.857	1.136	28.85	R	U	
LC 105HK 07									2.250	57.15	91.02	1.629	1.264	32.11	S	W	
LC 105HK 08									2.500	63.50	81.08	1.451	1.392	35.36	S	X	
LC 105HK 09									2.750	69.85	73.10	1.308	1.521	38.63	T	Y	
LC 105HK 10									3.000	76.20	66.55	1.191	1.649	41.88	U	Z	
LC 105HK 11									3.250	82.55	61.08	1.093	1.778	45.16	U	Z	
LC 105HK 12									3.500	88.90	56.44	1.010	1.906	48.41	W	Z	
LC 105HK 13									4.000	101.60	48.99	0.877	2.163	54.94	X	AB	
LC 055J 0	.720	18.29	.750	19.05	.055	1.400	13.000	5.888	0.625	15.88	28.70	0.513	0.203	5.16	J	L	S
LC 055J 01									0.750	19.05	23.00	0.410	0.221	5.61	J	L	S
LC 055J 02									0.875	22.22	20.00	0.357	0.242	6.15	J	L	S
LC 055J 03									1.000	25.40	18.50	0.330	0.249	6.32	J	L	S
LC 055J 04									1.250	31.75	14.00	0.250	0.304	7.72	J	L	S
LC 055J 05									1.500	38.10	11.50	0.205	0.331	8.41	J	L	S
LC 055J 06									1.750	44.45	9.00	0.160	0.400	10.16	K	M	T
LC 055J 07									2.000	50.80	8.50	0.152	0.421	10.69	K	M	T
LC 055J 08									2.250	57.15	7.25	0.129	0.467	11.86	K	M	T
LC 055J 09									2.500	63.50	6.60	0.118	0.516	13.11	K	M	T
LC 055J 10									2.750	69.85	6.00	0.107	0.548	13.92	K	M	T
LC 055J 11									3.000	76.20	5.50	0.098	0.587	14.91	K	M	T
LC 059J 01	.720	18.29	.750	19.05	.059	1.500	17.000	7.710	0.750	19.05	32.90	0.588	0.238	6.04	J	L	S
LC 059J 02									0.875	22.23	27.30	0.488	0.262	6.65	J	L	S
LC 059J 03									1.000	25.40	23.50	0.420	0.284	7.22	J	L	S
LC 059J 04									1.250	31.75	18.30	0.327	0.331	8.40	J	L	S
LC 059J 05									1.500	38.10	15.00	0.268	0.377	9.56	J	L	S
LC 059J 06									1.750	44.45	12.70	0.227	0.423	10.74	K	M	T
LC 059J 07									2.000	50.80	11.00	0.196	0.469	11.92	K	M	T
LC 059J 08									2.250	57.15	9.70	0.173	0.516	13.10	K	M	T
LC 059J 09									2.500	63.50	8.70	0.155	0.561	14.25	K	M	T
LC 063J 0	.720	18.29	.750	19.05	.063	1.600	15.500	7.020	0.625	15.88	41.50	0.741	0.263	6.68	J	L	S
LC 063J 01									0.750	19.05	33.00	0.588	0.284	7.21	J	L	S
LC 063J 02									0.875	22.22	28.00	0.499	0.316	8.03	J	L	S
LC 063J 03									1.000	25.40	24.00	0.428	0.355	9.02	J	L	S
LC 063J 04									1.250	31.75	19.00	0.339	0.441	10.44	K	M	T
LC 063J 05									1.500	38.10	15.00	0.267	0.489	12.42	K	M	T
LC 063J 06									1.750	44.45	13.00	0.232	0.536	13.61	K	M	T
LC 063J 07									2.000	50.80	11.00	0.196	0.616	15.65	K	M	T
LC 063J 08									2.250	57.15	10.00	0.178	0.673	17.09	L	N	U
LC 063J 09									2.500	63.50	9.00	0.160	0.736	18.69	L	N	U
LC 063J 10									2.750	69.85	8.00	0.143	0.792	20.12	L	N	U
LC 063J 11									3.000	76.20	7.25	0.129	0.860	21.84	L	N	U



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 065J 01	.720	18.29	.750	19.05	.065	1.65	19.000	8.605	0.750	19.05	41.00	0.731	0.290	7.37	J	L	S
LC 065J 02									0.875	22.22	35.00	0.624	0.322	8.18	J	L	S
LC 065J 03									1.000	25.40	29.00	0.517	0.355	9.02	J	L	S
LC 065J 04									1.250	31.75	23.00	0.410	0.420	10.67	K	M	T
LC 065J 05									1.500	38.10	19.00	0.339	0.465	11.81	K	M	T
LC 065J 06									1.750	44.45	15.50	0.276	0.537	13.64	K	M	T
LC 065J 07									2.000	50.80	13.50	0.241	0.611	15.52	K	M	T
LC 065J 08									2.250	57.15	12.00	0.214	0.660	16.76	L	N	U
LC 065J 09									2.500	63.50	10.50	0.187	0.743	18.87	L	N	U
LC 065J 10									2.750	69.85	9.15	0.163	0.818	20.78	N	R	X
LC 065J 11									3.000	76.20	8.35	0.149	0.883	22.43	N	R	X
LC 067J 01	.720	18.29	.750	19.05	.067	1.70	22.000	9.964	0.750	19.05	50.00	0.892	0.286	7.26	J	L	S
LC 067J 02									0.875	22.22	40.00	0.713	0.319	8.10	J	L	S
LC 067J 03									1.000	25.40	33.00	0.588	0.353	8.97	J	L	S
LC 067J 04									1.250	31.75	27.00	0.481	0.403	10.24	K	M	T
LC 067J 05									1.500	38.10	22.00	0.392	0.471	11.96	K	M	T
LC 067J 06									1.750	44.45	18.00	0.321	0.537	13.64	K	M	T
LC 067J 07									2.000	50.80	15.50	0.276	0.606	15.39	K	M	T
LC 067J 08									2.250	57.15	14.00	0.250	0.669	16.99	L	N	U
LC 067J 09									2.500	63.50	13.75	0.246	0.725	18.42	L	N	U
LC 067J 10									3.000	76.20	10.00	0.178	0.883	22.43	L	N	U
LC 067J 11									3.250	82.55	9.20	0.164	0.935	23.75	M	P	W
LC 067J 12									3.500	88.90	8.51	0.152	0.998	25.35	M	P	W
LC 072J 01	.720	18.29	.750	19.05	.072	1.83	25.000	11.322	0.875	22.22	48.00	0.856	0.361	9.17	J	M	T
LC 072J 02									1.000	25.40	42.00	0.749	0.397	10.08	J	M	T
LC 072J 03									1.250	31.75	33.00	0.588	0.470	11.94	K	N	U
LC 072J 04									1.500	38.10	26.00	0.464	0.559	14.20	K	N	U
LC 072J 05									1.750	44.45	22.00	0.392	0.631	16.03	K	N	U
LC 072J 06									2.000	50.80	20.00	0.357	0.686	17.42	K	N	U
LC 072J 07									2.250	57.15	17.00	0.303	0.779	19.79	M	R	X
LC 072J 08									2.500	63.50	15.00	0.267	0.869	22.07	M	R	X
LC 072J 09									2.750	69.85	14.00	0.250	0.927	23.54	M	R	X
LC 072J 10									3.000	76.20	12.50	0.223	1.015	25.78	M	R	X
LC 072J 11									3.500	88.90	10.50	0.187	1.150	29.21	N	S	Y
LC 072J 12									4.000	101.60	9.14	0.163	1.321	33.55	P	T	AA
LC 080J 01	.720	18.29	.750	19.05	.080	2.03	39.000	17.650	0.875	22.22	80.26	1.430	0.404	10.26	L	P	Special Order
LC 080J 02									1.000	25.40	68.53	1.220	0.444	11.28	L	P	
LC 080J 03									1.250	31.75	52.66	0.940	0.526	13.36	L	P	
LC 080J 04									1.500	38.10	42.94	0.765	0.607	15.42	L	R	
LC 080J 05									1.750	44.45	36.05	0.644	0.690	17.52	M	S	
LC 080J 06									2.000	50.80	31.20	0.557	0.770	19.56	N	T	
LC 080J 07									2.250	57.15	27.47	0.490	0.855	21.72	P	U	
LC 080J 08									2.500	63.50	24.54	0.438	0.935	23.75	P	W	
LC 080J 09									2.750	69.85	22.21	0.396	1.015	25.78	R	X	
LC 080J 10									3.000	76.20	20.23	0.361	1.095	27.81	S	Y	
LC 080J 11									3.500	88.90	16.98	0.303	1.273	32.33	T	Z	
LC 080J 12									4.000	101.60	14.77	0.264	1.440	36.58	U	AA	

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
															M	S	S316
LC 085J 01									0.875	22.23	113.70	2.030	0.411	10.43	L	P	Special Order
LC 085J 02									1.000	25.40	97.00	1.732	0.451	11.46	L	P	
LC 085J 03									1.250	31.75	74.50	1.331	0.534	13.57	L	P	
LC 085J 04									1.500	38.10	60.50	1.081	0.617	15.68	L	R	
LC 085J 05									1.750	44.45	50.90	0.910	0.701	17.80	M	S	
LC 085J 06	.720	18.29	.750	19.05	.085	2.16	54.500	24.720	2.000	50.80	44.00	0.786	0.784	19.91	N	T	
LC 085J 07									2.250	57.15	38.70	0.691	0.867	22.02	P	U	
LC 085J 08									2.500	63.50	34.50	0.617	0.950	24.13	P	W	
LC 085J 09									2.750	69.85	31.20	0.557	1.033	26.24	R	X	
LC 085J 10									3.000	76.20	28.40	0.508	1.116	28.36	S	Y	
LC 085J 11									3.500	88.90	24.20	0.432	1.283	32.58	T	Z	
LC 085J 12									4.000	101.60	21.00	0.375	1.449	36.80	U	AA	
LC 095J 01									0.875	22.23	178.53	3.188	0.459	11.65	M	R	Special Order
LC 095J 02									1.000	25.40	150.98	2.696	0.507	12.87	M	R	
LC 095J 03									1.250	31.75	115.37	2.060	0.602	15.30	M	R	
LC 095J 04									1.500	38.10	93.35	1.667	0.698	17.74	M	S	
LC 095J 05									1.750	44.45	78.39	1.400	0.794	20.18	N	T	
LC 095J 06	.720	18.29	.750	19.05	.095	2.41	76.730	34.810	2.000	50.80	67.57	1.207	0.890	22.61	P	U	
LC 095J 07									2.250	57.15	59.37	1.060	0.986	25.05	R	W	
LC 095J 08									2.500	63.50	52.94	0.945	1.082	27.49	R	X	
LC 095J 09									2.750	69.85	47.77	0.853	1.178	29.92	S	Y	
LC 095J 10									3.000	76.20	43.52	0.777	1.274	32.36	T	Z	
LC 095J 11									3.500	88.90	36.95	0.660	1.466	37.23	U	AA	
LC 095J 12									4.000	101.60	32.10	0.573	1.658	42.11	W	AB	
LC 105J 01									0.875	22.23	274.64	4.904	0.525	13.33	T	Y	Special Order
LC 105J 02									1.000	25.40	231.18	4.128	0.583	14.81	T	Y	
LC 105J 03									1.250	31.75	175.61	3.136	0.699	17.76	T	Y	
LC 105J 04									1.500	38.10	141.58	2.528	0.815	20.70	T	Z	
LC 105J 05									1.750	44.45	118.59	2.118	0.931	23.65	U	Z	
LC 105J 06	.720	18.29	.750	19.05	.105	2.67	100.330	45.510	2.000	50.80	102.03	1.822	1.047	26.60	U	AA	
LC 105J 07									2.250	57.15	89.53	1.599	1.163	29.55	W	AB	
LC 105J 08									2.500	63.50	79.75	1.424	1.279	32.49	W	AC	
LC 105J 09									2.750	69.85	71.90	1.284	1.395	35.44	X	AD	
LC 105J 10									3.000	76.20	65.46	1.169	1.511	38.39	X	AE	
LC 105J 11									3.500	88.90	55.51	0.991	1.743	44.28	Y	AG	
LC 105J 12									4.000	101.60	48.19	0.861	1.975	50.18	Z	AJ	



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 112J 01	.720	18.29	.750	19.05	.112	2.84	130.00	58.970	0.875	22.23	372.80	6.658	0.568	14.44	U	AB	Special Order
LC 112J 02									1.000	25.40	312.80	5.586	0.631	16.03	U	AB	
LC 112J 03									1.250	31.75	236.60	4.225	0.757	19.22	U	AB	
LC 112J 04									1.500	38.10	190.20	3.397	0.882	22.40	U	AB	
LC 112J 05									1.750	44.45	159.10	2.840	1.007	25.59	U	AB	
LC 112J 06									2.000	50.80	136.70	2.441	1.133	28.77	U	AB	
LC 112J 07									2.250	57.15	119.80	2.139	1.258	31.95	W	AB	
LC 112J 08									2.500	63.50	106.60	1.904	1.383	35.14	W	AB	
LC 112J 09									2.750	69.85	96.10	1.716	1.509	38.32	X	AD	
LC 112J 10									3.000	76.20	87.40	1.561	1.634	41.51	X	AD	
LC 112J 11									3.500	88.90	74.10	1.323	1.885	47.88	Y	AE	
LC 112J 12									4.000	101.60	64.30	1.148	2.136	54.25	AA	AJ	
LC 135JJ 01	.750	19.05	.781	20.65	.135	3.43	217.766	98.779	0.875	22.23	843.00	15.090	0.617	15.67	P	U	Special Order
LC 135JJ 02									1.000	25.40	698.65	12.506	0.687	17.45	P	U	
LC 135JJ 03									1.500	38.10	414.65	7.422	0.966	24.54	S	X	
LC 135JJ 04									1.750	44.45	344.61	6.168	1.106	28.09	T	Y	
LC 135JJ 05									2.000	50.80	294.81	5.277	1.246	31.65	T	Z	
LC 135JJ 06									2.250	57.15	257.58	4.611	1.386	35.20	U	AA	
LC 135JJ 07									2.500	63.50	228.71	4.094	1.526	38.76	U	AB	
LC 135JJ 08									3.000	76.20	186.82	3.344	1.806	45.87	X	AD	
LC 135JJ 09									3.500	88.90	157.90	2.826	2.086	52.98	Y	AD	
LC 135JJ 10									3.750	95.25	146.56	2.623	2.226	56.54	Y	AG	
LC 135JJ 11									4.000	101.60	136.73	2.448	2.366	60.10	Y	AG	
LC 135JK 01	.813	20.65	.844	22.23	.135	3.43	170.970	77.552	0.875	22.23	643.31	11.515	0.609	15.47	N	T	Special Order
LC 135JK 02									1.000	25.40	533.16	9.543	0.678	17.22	P	U	
LC 135JK 03									1.500	38.10	316.43	5.664	0.951	24.16	R	X	
LC 135JK 04									1.750	44.45	262.98	4.707	1.088	27.64	S	Z	
LC 135JK 05									2.000	50.80	224.97	4.027	1.225	31.12	T	Z	
LC 135JK 06									2.250	57.15	196.57	3.519	1.362	34.59	U	Z	
LC 135JK 07									2.500	63.50	174.53	3.124	1.499	38.07	U	AB	
LC 135JK 08									3.000	76.20	142.57	2.552	1.772	45.01	W	AD	
LC 135JK 09									3.500	88.90	120.50	2.157	2.046	51.97	X	AE	
LC 135JK 10									3.750	95.25	111.84	2.002	2.183	55.45	Y	AG	
LC 135JK 11									4.000	101.60	104.34	1.868	2.320	58.93	Y	AJ	
LC 050K 01	.845	21.46	.875	22.23	.050	1.27	7.000	3.175	0.750	19.05	12.97	0.232	0.181	4.62	L	P	W
LC 050K 02									0.875	22.23	10.88	0.194	0.195	4.95	L	P	W
LC 050K 03									1.000	25.40	9.37	0.167	0.210	5.32	L	P	W
LC 050K 04									1.250	31.75	7.33	0.131	0.237	6.03	L	P	W
LC 050K 05									1.500	38.10	6.02	0.108	0.265	6.73	L	P	W
LC 050K 06									2.000	50.80	4.44	0.079	0.320	8.13	M	S	Y
LC 050K 07									2.500	63.50	3.51	0.063	0.375	9.54	P	U	AB
LC 050K 08									3.000	76.20	2.91	0.052	0.431	10.94	R	X	AD
LC 050K 09									3.500	88.90	2.48	0.044	0.486	12.35	S	X	AD
LC 050K 10									4.000	101.60	2.16	0.039	0.541	13.75	S	X	AD

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 055K 01	.845	21.46	.875	22.23	.055	1.40	10.000	4.537	0.750	19.05	18.05	0.331	0.196	4.98	L	P	W
LC 055K 02									0.875	22.22	15.10	0.270	0.218	5.52	L	P	W
LC 055K 03									1.000	25.40	12.98	0.232	0.278	6.04	L	P	W
LC 055K 04									1.250	31.75	10.13	0.181	0.271	6.89	L	P	W
LC 055K 05									1.500	38.10	8.31	0.148	0.304	7.73	L	P	W
LC 055K 06									2.000	50.80	6.11	0.109	0.370	9.41	M	S	Y
LC 055K 07									2.500	63.50	4.83	0.086	0.437	11.09	P	U	AB
LC 055K 08									3.000	76.20	4.00	0.071	0.503	12.78	R	X	AD
LC 055K 09									3.500	88.90	3.41	0.061	0.569	14.46	S	X	AD
LC 055K 10									4.000	101.60	2.97	0.053	0.636	16.14	S	X	AD
LC 067K 01	.845	21.46	.875	22.23	.067	1.70	16.000	7.257	0.750	19.05	34.15	0.610	0.270	8.86	L	P	W
LC 067K 02									0.875	22.22	28.41	0.507	0.295	7.49	L	P	W
LC 067K 03									1.000	25.40	24.32	0.434	0.321	8.15	L	P	W
LC 067K 04									1.250	31.75	18.88	0.337	0.372	9.45	L	P	W
LC 067K 05									1.500	38.10	15.40	0.275	0.423	10.74	L	P	W
LC 067K 06									2.000	50.80	11.26	0.201	0.526	13.36	M	S	Y
LC 067K 07									2.500	63.50	8.89	0.159	0.628	15.95	P	U	AB
LC 067K 08									3.000	76.20	7.34	0.131	0.730	18.54	R	U	AB
LC 067K 09									3.500	88.90	6.25	0.111	0.832	21.13	S	W	AC
LC 067K 10									4.000	101.60	5.45	0.097	0.934	23.72	T	X	AD
LC 072K 01	.845	21.46	.875	22.23	.072	1.83	23.000	10.432	0.875	22.22	40.60	0.725	0.309	7.85	L	P	W
LC 072K 02									1.000	25.40	34.91	0.623	0.334	8.48	L	P	W
LC 072K 03									1.250	31.75	26.85	0.479	0.388	9.85	L	P	W
LC 072K 04									1.500	38.10	21.82	0.390	0.442	11.22	L	P	W
LC 072K 05									1.750	44.45	18.37	0.328	0.496	12.60	M	S	Y
LC 072K 06									2.000	50.80	16.02	0.286	0.547	13.89	M	S	Y
LC 072K 07									2.500	63.50	12.48	0.223	0.658	16.71	P	U	AB
LC 072K 08									3.000	76.20	10.39	0.185	0.759	19.28	R	W	AC
LC 072K 09									3.500	88.90	8.84	0.158	0.865	21.97	S	X	AD
LC 075K 01	.845	21.46	.875	22.23	.075	1.91	21.062	9.554	0.880	22.35	40.10	0.716	0.355	9.01	J	K	Special Order
LC 075K 02									1.000	25.40	34.44	0.615	0.388	9.85	J	P	
LC 075K 03									1.250	31.75	26.61	0.475	0.456	11.59	K	P	
LC 075K 04									1.500	38.10	21.68	0.387	0.525	13.33	K	P	
LC 075K 05									1.750	44.45	18.30	0.327	0.593	15.07	K	P	
LC 075K 06									2.000	50.80	15.82	0.283	0.662	16.82	N	P	
LC 075K 07									2.250	57.15	13.94	0.249	0.731	18.56	P	R	
LC 075K 08									2.500	63.50	12.46	0.222	0.799	20.30	P	S	
LC 075K 09									2.750	69.85	11.26	0.201	0.868	22.04	P	S	
LC 075K 10									3.000	76.20	10.27	0.183	0.936	23.78	R	S	
LC 075K 11									3.500	88.90	8.74	0.156	1.074	27.27	S	S	



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 080K 00	.845	21.46	.875	22.23	.080	2.03	30.000	13.587	0.875	22.22	57.20	1.021	0.362	9.19	L	P	Special Order
LC 080K 0									1.000	25.40	48.50	0.866	0.397	10.08	L	P	
LC 080K 01									1.250	31.75	38.00	0.678	0.457	11.61	L	P	
LC 080K 02									1.375	34.92	34.00	0.606	0.490	12.45	L	P	
LC 080K 03									1.500	38.10	31.00	0.553	0.522	13.26	L	P	
LC 080K 04									1.750	44.45	26.00	0.464	0.595	15.11	L	R	
LC 080K 05									2.000	50.80	22.00	0.392	0.670	17.02	M	S	
LC 080K 06									2.250	57.15	19.50	0.348	0.723	18.36	N	T	
LC 080K 07									2.500	63.50	17.50	0.312	0.786	19.96	P	U	
LC 080K 08									2.750	69.85	15.50	0.276	0.865	21.97	P	W	
LC 080K 09	.845	21.46	.875	22.23	.085	2.16	35.000	15.851	3.000	76.20	14.50	0.258	0.930	23.62	R	X	Special Order
LC 080K 10									3.500	89.00	12.03	0.215	1.083	27.50	S	Y	
LC 085K 00									0.750	19.05	86.11	1.538	0.356	9.04	L	P	
LC 085K 0									1.000	25.40	61.00	1.088	0.425	10.80	L	P	
LC 085K 01									1.250	31.75	46.00	0.820	0.507	12.88	L	P	
LC 085K 02									1.375	34.92	42.00	0.749	0.537	13.64	L	P	
LC 085K 03									1.500	38.10	38.00	0.678	0.579	14.71	L	P	
LC 085K 04									1.750	44.45	32.00	0.570	0.665	16.89	L	R	
LC 085K 05									2.000	50.80	27.00	0.481	0.736	18.69	M	S	
LC 085K 06									2.250	57.15	24.00	0.428	0.821	20.85	N	T	
LC 085K 07	.845	21.46	.875	22.23	.091	2.31	42.000	19.022	2.500	63.50	21.50	0.383	0.898	22.81	P	U	Special Order
LC 085K 08									2.750	69.85	19.50	0.348	0.961	24.41	P	W	
LC 085K 09									3.000	76.20	18.00	0.321	1.025	26.04	R	X	
LC 085K 10									3.500	88.90	15.00	0.267	1.190	30.23	S	Y	
LC 085K 11									4.000	101.60	13.04	0.233	1.343	34.11	T	Z	
LC 091K 01	.845	21.46	.875	22.23	.091	2.31	42.000	19.022	1.500	38.10	49.00	0.874	0.647	16.43	S	W	Special Order
LC 091K 02									1.750	44.45	41.00	0.731	0.730	18.54	S	W	
LC 091K 03									2.000	50.80	35.00	0.624	0.820	20.83	S	W	
LC 091K 04									2.250	57.15	31.00	0.553	0.910	23.10	T	X	
LC 091K 05									2.500	63.50	28.00	0.499	0.975	24.76	T	X	
LC 091K 06									2.750	69.85	25.00	0.446	1.080	27.43	U	Y	
LC 091K 07									3.000	76.20	23.00	0.410	1.185	30.10	U	Y	
LC 098K 00	.845	21.46	.875	22.23	.098	2.49	50.000	22.645	1.000	25.40	102.00	1.819	0.520	13.21	S	W	Special Order
LC 098K 0									1.250	31.75	78.00	1.391	0.617	15.67	S	W	
LC 098K 01									1.500	38.10	65.00	1.159	0.730	18.54	S	W	
LC 098K 02									1.750	44.45	54.00	0.963	0.814	20.68	S	W	
LC 098K 03									2.000	50.80	46.00	0.820	0.917	23.29	S	W	
LC 098K 04									2.250	57.15	40.00	0.713	1.010	25.65	T	W	
LC 098K 05									2.500	63.50	36.00	0.642	1.110	28.19	T	X	
LC 098K 06									2.750	69.85	32.50	0.579	1.220	30.99	U	Y	
LC 098K 07									3.000	76.20	29.50	0.526	1.320	33.52	U	Y	
LC 098K 08									3.500	88.90	25.50	0.455	1.472	38.61	W	Z	

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
															M	S	S316
LC 100K 01									1.000	25.40	124.70	2.230	0.501	12.72	T	X	
LC 100K 02									1.250	31.75	95.00	1.700	0.592	15.03	T	X	
LC 100K 03									1.500	38.10	76.74	1.370	0.683	17.34	T	X	
LC 100K 04									1.750	44.45	64.36	1.150	0.774	19.65	T	X	
LC 100K 05	.845	21.46	.875	22.23	.100	2.54	60.000	27.200	2.000	50.80	55.42	0.990	0.865	21.96	T	X	Special Order
LC 100K 06									2.250	57.15	48.66	0.869	0.955	24.27	U	X	
LC 100K 07									2.500	63.50	43.37	0.774	1.046	26.58	U	Y	
LC 100K 08									2.750	69.85	39.12	0.699	1.137	28.89	W	Z	
LC 100K 09									3.000	76.20	35.63	0.636	1.228	31.20	W	Z	
LC 100K 10									3.500	88.90	30.23	0.540	1.410	35.81	W	AA	
LC 092KK 01									0.875	22.23	85.41	1.529	0.438	11.13	S	W	
LC 092KK 02									1.000	25.40	72.33	1.295	0.483	12.27	S	W	
LC 092KK 03									1.500	38.10	44.85	0.803	0.662	16.81	S	W	
LC 092KK 04									1.750	44.45	37.69	0.675	0.752	19.10	T	X	
LC 092KK 05	.875	22.23	.906	23.83	.092	2.34	37.336	16.936	2.000	50.80	32.50	0.582	0.842	21.39	T	X	Special Order
LC 092KK 06									2.500	63.50	25.48	0.456	1.022	25.96	U	Y	
LC 092KK 07									2.750	69.85	23.00	0.412	1.112	28.24	U	Y	
LC 092KK 08									3.063	77.79	20.50	0.367	1.224	31.09	W	Z	
LC 092KK 09									3.500	88.90	17.80	0.319	1.381	35.08	W	Z	
LC 092KK 10									4.000	101.60	15.47	0.277	1.561	39.65	X	AA	
LC 120KK 01									1.500	38.10	150.62	2.696	0.816	20.73	P	Y	
LC 120KK 02									2.000	50.80	107.83	1.930	1.041	26.44	S	AA	
LC 120KK 03									2.250	57.15	94.42	1.690	1.154	29.31	S	AB	
LC 120KK 04									2.500	63.50	83.97	1.503	1.267	32.18	T	AC	Special Order
LC 120KK 05	.875	22.23	.906	23.83	.120	3.05	103.085	46.759	3.000	76.20	68.76	1.231	1.492	37.90	U	AE	
LC 120KK 06									3.500	88.90	58.21	1.042	1.718	43.64	W	AG	
LC 120KK 07									4.000	101.60	50.47	0.903	1.943	49.35	X	AK	
LC 120KK 08									4.500	114.30	44.55	0.797	2.169	55.09	Y	AL	
LC 120KK 09									5.000	127.00	39.87	0.714	2.394	60.81	Z	AN	
LC 120KK 10									5.500	139.70	36.08	0.646	2.620	66.55	AA	AO	
LC 148KK 01									1.000	25.40	695.21	12.444	0.698	17.73	R	W	
LC 148KK 02									1.500	38.10	406.50	7.276	0.978	24.84	S	Z	
LC 148KK 03									2.000	50.80	287.22	5.141	1.258	31.95	U	AB	
LC 148KK 04									2.250	57.15	250.47	4.483	1.397	35.48	W	AC	
LC 148KK 05									2.500	63.50	222.06	3.975	1.537	39.04	W	AD	Special Order
LC 148KK 06	.875	22.23	.906	23.83	.148	3.76	209.631	95.089	2.750	69.85	199.44	3.570	1.677	42.60	X	AD	
LC 148KK 07									3.000	76.20	181.00	3.240	1.817	46.15	Y	AG	
LC 148KK 08									3.500	88.90	152.76	2.734	2.096	53.24	Y	AJ	
LC 148KK 09									4.000	101.60	132.13	2.365	2.376	60.35	Z	AL	
LC 148KK 10									4.500	114.30	116.42	2.084	2.655	67.44	AA	AM	
LC 148KK 11									5.000	127.00	104.05	1.862	2.935	74.55	AC	AO	
LC 148KK 12									5.500	139.70	94.05	1.683	3.214	81.64	AD	AP	
LC 148KK 13									6.000	152.40	85.80	1.536	3.494	88.75	AE	AR	



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 105KL 01	.906	23.01	.938	23.83	.105	2.67	58.282	26.437	0.875	22.23	144.30	2.583	0.471	11.96	T	X	Special Order
LC 105KL 02									1.000	25.40	121.47	2.174	0.519	13.18	T	X	
LC 105KL 03									1.250	31.75	92.27	1.652	0.615	15.62	T	X	
LC 105KL 04									1.500	38.10	74.39	1.332	0.711	18.06	T	X	
LC 105KL 05									1.750	44.45	62.31	1.115	0.806	20.47	T	X	
LC 105KL 06									2.000	50.80	53.61	0.960	0.902	22.91	U	Y	
LC 105KL 07									2.250	57.15	47.04	0.842	0.998	25.35	U	Z	
LC 105KL 08									2.500	63.50	41.90	0.750	1.094	27.79	W	Z	
LC 105KL 09									2.750	69.85	37.78	0.676	1.190	30.23	W	AA	
LC 105KL 10									3.000	76.20	34.40	0.616	1.285	32.64	X	AB	
LC 105KL 11									3.500	88.90	29.17	0.522	1.477	37.52	Z	AC	
LC 105KL 12									4.000	101.60	25.32	0.453	1.669	42.39	AA	AD	
LC 080KM 01	.938	23.81	.969	25.40	.080	2.03	35.237	15.984	0.750	19.05	73.91	1.323	0.273	6.93	T	X	Special Order
LC 080KM 02									1.000	25.40	51.91	0.929	0.319	8.10	T	X	
LC 080KM 03									1.250	31.75	40.01	0.716	0.365	9.27	T	X	
LC 080KM 04									1.500	38.10	32.54	0.583	0.411	10.44	T	X	
LC 080KM 05									1.750	44.45	27.43	0.491	0.457	11.61	T	X	
LC 080KM 06									2.000	50.80	23.70	0.424	0.503	12.78	T	X	
LC 080KM 07									2.250	57.15	20.86	0.373	0.549	13.94	U	Y	
LC 080KM 08									2.500	63.50	18.64	0.334	0.595	15.11	W	Z	
LC 080KM 09									2.750	69.85	16.84	0.301	0.641	16.28	W	AA	
LC 080KM 10									2.938	74.61	15.70	0.281	0.675	17.15	X	AC	
LC 080KM 11									3.000	76.20	15.35	0.275	0.687	17.45	X	AC	
LC 080KM 12									3.500	88.90	13.06	0.234	0.779	19.79	Z	AC	
LC 080KM 13									4.000	101.60	11.36	0.203	0.871	22.12	AA	AD	
LC 063L 01	.970	24.64	1.000	25.40	.063	1.60	14.000	6.350	0.750	19.05	25.63	0.458	0.210	5.40	T	X	AD
LC 063L 02									1.000	25.40	18.30	0.327	0.245	6.22	T	X	AD
LC 063L 03									1.250	31.75	14.23	0.254	0.276	7.02	T	X	AD
LC 063L 04									1.500	38.10	11.64	0.208	0.307	7.81	T	X	AD
LC 063L 05									1.750	44.45	9.85	0.176	0.339	8.60	T	X	AD
LC 063L 06									2.000	50.80	8.53	0.152	0.370	9.39	T	X	AD
LC 063L 07									2.250	57.17	7.53	0.134	0.401	10.18	U	Y	AE
LC 063L 08									2.500	63.50	6.74	0.120	0.432	10.98	W	Z	AG
LC 063L 09									2.750	69.85	6.09	0.109	0.463	11.77	W	AA	AJ
LC 063L 10									3.000	76.20	5.56	0.099	0.495	12.56	W	AC	AL
LC 063L 11									3.500	88.90	4.74	0.083	0.557	14.15	Z	AC	AL
LC 063L 12									4.000	101.60	4.13	0.072	0.619	15.73	Z	AC	AL

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
															M	S	S316
LC 072L 01									0.750	19.05	39.50	0.705	0.245	6.22	T	X	Special Order
LC 072L 02									1.000	25.40	27.96	0.499	0.297	7.55	T	X	
LC 072L 03									1.250	31.75	21.64	0.386	0.339	8.62	T	X	
LC 072L 04									1.500	38.10	17.65	0.315	0.381	9.68	T	X	
LC 072L 05									1.750	44.45	14.90	0.266	0.423	10.74	T	X	
LC 072L 06	.970	24.64	1.000	25.40	.072	1.83	20.000	9.070	2.000	50.80	12.90	0.230	0.465	11.81	T	X	
LC 072L 07									2.250	57.15	11.37	0.203	0.507	12.87	U	Y	
LC 072L 08									2.500	63.50	10.16	0.181	0.548	13.93	W	Z	
LC 072L 09									2.750	69.85	9.16	0.164	0.590	15.00	W	AA	
LC 072L 10									3.000	76.20	8.38	0.150	0.632	16.06	X	AC	
LC 072L 11									3.500	88.90	7.13	0.127	0.716	18.18	Z	AC	
LC 072L 12									4.000	101.60	6.21	0.111	0.800	20.31	Z	AC	
LC 080L 01									0.750	19.05	60.50	1.080	0.270	6.88	T	X	Special Order
LC 080L 02									1.000	25.40	43.60	0.779	0.330	8.38	T	X	
LC 080L 03									1.250	31.75	33.90	0.605	0.376	9.55	T	X	
LC 080L 04									1.500	38.10	27.60	0.493	0.423	10.74	T	X	
LC 080L 05									1.750	44.45	23.20	0.414	0.470	11.94	T	X	
LC 080L 06	.970	24.64	1.000	25.40	.080	2.03	30.000	13.640	2.000	50.80	20.10	0.359	0.517	13.13	T	X	
LC 080L 07									2.250	57.15	17.70	0.316	0.565	14.35	U	Y	
LC 080L 08									2.500	63.50	15.80	0.282	0.612	15.54	W	Z	
LC 080L 09									2.750	69.85	14.30	0.255	0.659	16.74	W	AA	
LC 080L 10									3.000	76.20	13.00	0.232	0.706	17.93	X	AC	
LC 080L 11									3.500	88.90	11.10	0.198	0.800	20.32	Z	AC	
LC 080L 12									4.000	101.60	9.65	0.172	0.893	22.68	AA	AD	
LC 085L 01									1.000	25.40	57.43	1.026	0.337	8.56	T	X	Special Order
LC 085L 02									1.250	31.75	44.14	0.788	0.388	9.84	T	X	
LC 085L 03									1.500	38.10	35.84	0.640	0.438	11.12	T	X	
LC 085L 04									1.750	44.45	30.17	0.539	0.488	12.40	T	X	
LC 085L 05									2.000	50.80	26.05	0.465	0.539	13.68	T	X	
LC 085L 06	.970	24.64	1.000	25.40	.085	2.16	38.070	17.270	2.250	57.15	22.92	0.409	0.589	14.96	U	Y	
LC 085L 07									2.500	63.50	20.46	0.365	0.639	16.24	W	Z	
LC 085L 08									2.750	69.85	18.48	0.330	0.690	17.52	W	AA	
LC 085L 09									3.000	76.20	16.84	0.301	0.740	18.80	X	AC	
LC 085L 10									3.500	88.90	14.32	0.256	0.841	21.35	Z	AC	
LC 085L 11									4.000	101.60	12.45	0.222	0.941	23.91	AA	AD	
LC 092L 01									0.875	22.23	72.00	1.286	0.398	10.12	T	X	Special Order
LC 092L 02									1.000	25.40	61.00	1.089	0.436	11.08	T	X	
LC 092L 03									1.250	31.75	46.70	0.834	0.512	13.00	T	X	
LC 092L 04									1.500	38.10	37.80	0.675	0.588	14.92	T	X	
LC 092L 05	.970	24.64	1.000	25.40	.092	2.34	35.150	15.940	2.000	50.80	27.40	0.489	0.739	18.76	T	X	
LC 092L 06									2.500	63.50	21.50	0.384	0.889	22.59	W	Z	
LC 092L 07									3.000	76.20	17.70	0.316	1.040	26.40	X	AC	
LC 092L 08									3.500	88.90	15.00	0.268	1.193	30.29	Z	AC	
LC 092L 09									4.000	101.60	13.00	0.232	1.347	34.21	AA	AD	



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 095L 00 LC 095L 0	.970	24.64	1.000	25.40	.095	2.41	46.000	20.850	1.000	25.40	76.68	1.370	0.417	10.60	T	X	Special Order
LC 095L 01 LC 095L 02									1.250	31.75	58.27	1.040	0.485	12.30	T	X	
LC 095L 03 LC 095L 04									1.500	38.10	47.25	0.844	0.552	14.02	T	X	
LC 095L 05 LC 095L 06									1.750	44.45	39.73	0.709	0.618	15.70	T	X	
LC 095L 07 LC 095L 08									2.000	50.80	34.30	0.612	0.685	17.40	T	X	
LC 095L 09									2.250	57.15	30.14	0.538	0.751	19.07	U	Y	
LC 105L 00 LC 105L 0A	.970	24.64	1.000	25.40	.105	2.67	58.000	26.268	2.500	63.50	26.90	0.480	0.817	20.75	W	Z	Special Order
LC 105L 01 LC 105L 02									2.750	69.85	24.28	0.433	0.885	22.45	W	AA	
LC 105L 03 LC 105L 04									3.000	76.20	22.13	0.395	0.951	24.15	X	AC	
LC 105L 05 LC 105L 06									3.500	88.90	18.75	0.335	1.088	27.63	Z	AC	
LC 105L 07 LC 105L 08									4.000	101.60	16.24	0.270	1.222	31.04	AA	AD	
LC 105L 09									0.875	22.23	133.50	2.384	0.435	11.05	W	AB	Special Order
LC 105L 0A									1.000	25.40	112.50	2.009	0.476	12.09	W	AB	
LC 105L 01 LC 105L 02									1.250	31.75	85.00	1.516	0.546	13.87	W	AB	
LC 105L 03 LC 105L 04									1.500	38.10	69.00	1.230	0.650	16.51	W	AB	
LC 105L 05 LC 105L 06									1.750	44.45	57.00	1.016	0.745	18.92	W	AB	
LC 105L 07 LC 105L 08									2.000	50.80	49.00	0.874	0.820	20.83	X	AC	
LC 105L 09									2.250	57.15	43.00	0.767	0.905	22.99	X	AD	
LC 112L 00 LC 112L 0A	.970	24.64	1.000	25.40	.112	2.84	65.000	29.438	2.500	63.50	38.00	0.678	1.000	25.40	Y	AD	Special Order
LC 112L 01 LC 112L 02									2.750	69.85	34.00	0.606	1.080	27.43	Y	AE	
LC 112L 03 LC 112L 04									3.000	76.20	31.00	0.553	1.170	29.72	Z	AJ	
LC 112L 05 LC 112L 06									3.500	88.90	27.00	0.481	1.325	33.66	AA	AJ	
LC 112L 07 LC 112L 08									4.000	101.60	23.44	0.419	1.430	36.32	AB	AK	
LC 112L 09									0.875	22.23	165.50	2.955	0.480	12.20	U	AB	Special Order
LC 112L 0A									1.000	25.40	139.00	2.482	0.528	13.41	U	AB	
LC 112L 01 LC 112L 02									1.250	31.75	105.00	1.872	0.605	15.37	U	AB	
LC 112L 03 LC 112L 04									1.500	38.10	85.00	1.516	0.732	18.59	U	AB	
LC 112L 05 LC 112L 06									1.750	44.45	71.00	1.266	0.845	21.46	U	AB	
LC 112L 07 LC 112L 08									2.000	50.80	61.00	1.088	0.947	24.05	W	AC	
LC 112L 09									2.250	57.15	54.00	0.963	1.035	26.29	W	AD	
LC 115L 01 LC 115L 02	.970	24.64	1.000	25.40	.115	2.92	72.000	32.609	2.500	63.50	47.00	0.838	1.147	29.13	X	AD	Special Order
LC 115L 03 LC 115L 04									2.750	69.85	43.00	0.767	1.237	31.42	X	AE	
LC 115L 05 LC 115L 06									3.000	76.20	39.00	0.695	1.348	34.24	Y	AG	
LC 115L 07									3.500	88.90	33.00	0.588	1.565	39.75	AA	AJ	
LC 115L 01 LC 115L 02									4.000	101.60	28.64	0.511	1.634	41.50	AB	AK	
LC 115L 03 LC 115L 04									1.750	44.45	78.00	1.391	0.838	21.29	U	AB	Special Order
LC 115L 05 LC 115L 06									2.000	50.80	68.00	1.212	0.930	23.62	X	AC	
LC 115L 07									2.250	57.15	59.00	1.052	1.045	26.54	X	AE	
LC 115L 01 LC 115L 02									2.500	63.50	52.00	0.927	1.130	28.70	X	AE	
LC 115L 03 LC 115L 04									3.000	76.20	43.00	0.767	1.330	33.78	Z	AJ	
LC 115L 05 LC 115L 06									3.500	88.90	36.00	0.642	1.520	38.61	AA	AK	
LC 115L 07									4.000	101.60	32.00	0.570	1.730	43.94	AC	AL	

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
															M	S	S316
LC 120L 0									1.500	38.10	113.67	2.030	0.785	19.94	U	AB	Special Order
LC 120L 01									1.750	44.45	95.00	1.694	0.905	22.99	U	AB	
LC 120L 02									2.000	50.80	82.00	1.462	1.015	25.78	U	AC	
LC 120L 03									2.250	57.15	71.00	1.266	1.133	28.78	X	AE	
LC 120L 04	.970	24.64	1.000	25.40	.120	3.05	80.000	36.232	2.500	63.50	64.00	1.141	1.254	31.85	X	AE	
LC 120L 05									3.000	76.20	52.00	0.927	1.456	36.98	Z	AJ	
LC 120L 06									3.500	88.90	44.00	0.784	1.685	42.80	AA	AK	
LC 120L 07									4.000	101.60	38.00	0.678	1.925	48.90	AC	AK	
LC 125L 00									0.875	22.23	276.00	4.929	0.529	13.43	W	AC	Special Order
LC 125L 0A									1.000	25.40	230.00	4.107	0.583	14.81	W	AC	
LC 125L 0									1.250	31.75	172.50	3.080	0.692	17.57	W	AC	
LC 125L 01									1.500	38.10	138.21	2.468	0.776	19.71	W	AC	
LC 125L 02									1.750	44.45	115.17	2.057	0.881	22.39	W	AC	
LC 125L 03	.970	24.64	1.000	25.40	.125	3.180	100.050	45.380	2.000	50.80	98.72	1.763	0.987	25.06	X	AD	
LC 125L 04									2.250	57.15	86.38	1.543	1.092	27.73	Y	AG	
LC 125L 05									2.500	63.50	76.78	1.371	1.197	30.40	Y	AG	Special Order
LC 125L 06									3.000	76.20	62.82	1.122	1.407	35.75	AA	AK	
LC 125L 07									3.500	88.90	53.16	0.949	1.618	41.09	AB	AL	
LC 125L 08									4.000	101.60	46.07	0.823	1.828	46.44	AD	AM	
LC 135L 00									0.875	22.23	366.00	6.536	0.590	14.98	X	AD	Special Order
LC 135L 0									1.000	25.40	303.00	5.411	0.654	16.62	X	AD	
LC 135L 01									1.500	38.10	180.03	3.215	0.912	23.15	X	AD	
LC 135L 02									1.750	44.45	149.62	2.672	1.040	26.42	X	AD	
LC 135L 03									2.000	50.80	128.00	2.286	1.169	29.69	Y	AE	
LC 135L 04	.970	24.64	1.000	25.40	.135	3.429	106.000	48.080	2.250	57.15	111.84	1.997	1.298	32.96	Z	AD	
LC 135L 05									2.500	63.50	99.30	1.773	1.427	36.23	Z	AJ	
LC 135L 06									3.000	76.20	81.11	1.448	1.684	42.77	AB	AL	Special Order
LC 135L 07									3.500	88.90	68.56	1.224	1.942	49.32	AC	AM	
LC 135L 08									4.000	101.60	59.37	1.060	2.199	55.86	AE	AN	
LC 148L 01									1.000	25.40	459.00	8.197	0.717	18.22	X	AG	Special Order
LC 148L 02									1.500	38.10	268.40	4.793	1.010	25.66	X	AG	
LC 148L 03									2.000	50.80	189.60	3.386	1.303	33.10	Z	AL	
LC 148L 04	.970	24.64	1.000	25.40	.148	3.760	132.000	59.860	2.500	63.50	146.60	2.618	1.596	40.54	AC	AO	
LC 148L 05									3.000	76.20	119.50	2.134	1.889	47.98	AE	AP	
LC 148L 06									3.500	88.90	100.90	1.802	2.181	55.40	AG	AR	
LC 148L 07									4.000	101.60	87.20	1.557	2.476	62.88	AK	AT	
LC 162L 01									1.500	38.10	415.20	7.415	1.088	27.64	Z	AG	Special Order
LC 162L 02									2.000	50.80	291.30	5.202	1.409	35.78	AC	AM	
LC 162L 03	.970	24.64	1.000	25.40	.162	4.110	173.000	78.460	2.500	63.50	224.40	4.007	1.729	43.92	AG	AN	
LC 162L 04									3.000	76.20	182.50	3.259	2.050	52.06	AJ	AR	
LC 162L 05									3.500	88.90	153.70	2.745	2.371	60.23	AL	AS	
LC 162L 06									4.000	101.60	132.80	2.372	2.692	68.38	AN	AU	



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 120LL 01									1.000	25.40	169.42	3.033	0.550	13.97	T	X	
LC 120LL 02									1.500	38.10	102.19	1.829	0.748	19.00	U	Y	
LC 120LL 03									2.000	50.80	73.16	1.310	0.947	24.05	U	Y	
LC 120LL 04									2.250	57.15	64.06	1.147	1.047	26.59	W	Z	
LC 120LL 05	1.016	25.81	1.125	28.58	.120	3.05	76.321	34.619	2.563	65.09	55.44	0.992	1.171	29.74	W	Z	Special Order
LC 120LL 06									2.750	69.85	51.30	0.918	1.246	31.65	X	AA	
LC 120LL 07									3.000	76.20	46.65	0.835	1.345	34.16	Y	AB	
LC 120LL 08									3.500	88.90	39.50	0.707	1.544	39.22	Z	AC	
LC 120LL 09									4.000	101.60	34.25	0.613	1.743	44.27	AA	AD	
LC 120LL 10									4.500	114.30	30.23	0.541	1.942	49.33	AC	AG	
LC 082M 01									0.875	22.23	42.60	0.761	0.287	7.29	T	X	
LC 082M 02									1.000	25.40	36.00	0.643	0.318	8.08	T	X	
LC 082M 03									1.250	31.75	27.90	0.498	0.366	9.30	T	X	
LC 082M 04									1.500	38.10	22.70	0.405	0.410	10.41	T	X	
LC 082M 05	1.095	27.81	1.125	28.58	.082	2.08	25.000	11.360	1.750	44.45	19.10	0.341	0.454	11.53	T	X	Special Order
LC 082M 06									2.000	50.80	16.50	0.295	0.498	12.65	T	X	
LC 082M 07									2.500	63.50	13.00	0.232	0.586	14.88	W	Z	
LC 082M 08									3.000	76.20	10.70	0.191	0.674	17.12	X	AC	
LC 082M 09									3.500	88.90	9.10	0.163	0.763	19.38	AA	AD	
LC 082M 10									4.000	101.60	7.90	0.141	0.851	21.62	Z	AC	
LC 093M 01									0.875	22.23	64.60	1.154	0.343	8.71	T	X	
LC 093M 02									1.000	25.40	54.60	0.975	0.382	9.70	T	X	
LC 093M 03									1.250	31.75	42.50	0.759	0.435	11.04	T	X	
LC 093M 04									1.500	38.10	34.30	0.613	0.492	12.50	T	X	
LC 093M 05	1.095	27.81	1.125	28.58	.093	2.36	35.000	15.910	1.750	44.45	28.90	0.516	0.548	13.92	T	X	Special Order
LC 093M 06									2.000	50.80	24.90	0.445	0.604	15.34	T	X	
LC 093M 07									2.500	63.50	19.50	0.348	0.716	18.20	W	Z	
LC 093M 08									3.000	76.20	16.00	0.286	0.829	21.06	X	AC	
LC 093M 09									3.500	88.90	13.65	0.244	0.940	23.90	Z	AC	
LC 093M 10									4.000	101.60	11.84	0.211	1.054	26.77	AA	AD	
LC 105M 01									1.000	25.40	81.87	1.462	0.451	11.45	W	AC	
LC 105M 02									1.250	31.75	62.10	1.111	0.525	13.33	W	AC	
LC 105M 03									1.500	38.10	50.00	0.893	0.598	15.19	W	AC	
LC 105M 04									1.750	44.45	42.00	0.750	0.670	17.01	W	AC	
LC 105M 05	1.095	27.81	1.125	28.58	.105	2.67	45.000	20.411	2.000	50.80	36.16	0.646	0.743	18.87	X	AD	Special Order
LC 105M 06									2.500	63.50	28.23	0.504	0.890	22.60	Y	AE	
LC 105M 07									3.000	76.20	23.18	0.414	1.036	26.31	AA	AG	
LC 105M 08									3.500	88.90	19.66	0.351	1.182	30.02	AB	AJ	
LC 105M 09									4.000	101.60	17.07	0.305	1.328	33.73	AD	AM	
LC 105M 10									4.500	114.30	15.07	0.269	1.475	37.46	AE	AN	

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.


CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
															M	S	S316
LC 112M 00									1.000	25.40	117.00	2.090	0.462	11.73	W	AD	Special Order
LC 112M 0									1.500	38.10	71.23	1.270	0.608	15.44	W	AD	
LC 112M 01									1.750	44.45	59.47	1.060	0.682	17.32	W	AD	
LC 112M 02									2.000	50.80	51.16	0.913	0.755	19.18	X	AE	
LC 112M 03	1.095	27.81	1.125	28.58	.112	2.84	66.000	29.900	2.250	57.15	44.88	0.801	0.828	21.03	Y	AJ	
LC 112M 04									2.500	63.50	39.65	0.708	0.915	23.24	Y	AJ	
LC 112M 05									3.000	76.20	32.72	0.584	1.050	26.67	AA	AL	
LC 112M 06									3.500	88.90	27.76	0.496	1.195	30.35	AB	AM	
LC 112M 07									4.000	101.60	24.03	0.429	1.343	34.11	AD	AN	
LC 112M 08									4.500	114.30	21.24	0.379	1.490	37.84	AE	AO	
LC 120M 01									1.000	25.40	153.00	2.732	0.502	12.75	W	AD	Special Order
LC 120M 02									1.500	38.10	92.50	1.652	0.668	17.00	X	AE	
LC 120M 03									1.750	44.45	77.20	1.379	0.750	19.00	X	AE	
LC 120M 04									2.000	50.80	66.30	1.184	0.833	21.15	Y	AG	
LC 120M 05									2.250	57.15	58.00	1.036	0.916	23.26	Y	AJ	
LC 120M 06	1.095	27.81	1.125	28.58	.120	3.00	78.000	34.450	2.500	63.50	51.60	0.921	0.999	25.37	Z	AJ	
LC 120M 07									3.000	76.20	42.30	0.755	1.164	29.56	AA	AK	
LC 120M 08									3.500	88.90	35.80	0.639	1.330	33.78	AB	AM	
LC 120M 09									4.000	101.60	31.00	0.554	1.498	38.04	AD	AN	
LC 120M 10									4.500	114.30	27.30	0.488	1.666	42.31	AE	AO	
LC 125M 00									0.875	22.23	224.00	4.000	0.479	12.15	W	AE	Special Order
LC 125M 0A									1.000	25.40	186.50	3.330	0.523	13.28	W	AE	
LC 125M 0B									1.250	31.75	140.00	2.500	0.611	15.52	W	AE	
LC 125M 0									1.500	38.10	112.00	1.997	0.675	17.14	X	AG	
LC 125M 01									1.750	44.45	91.00	1.622	0.768	19.51	X	AG	
LC 125M 02	1.095	27.81	1.125	28.58	.125	3.18	90.000	40.761	2.000	50.80	79.00	1.409	0.855	21.72	Y	AJ	
LC 125M 03									2.250	57.15	69.00	1.230	0.955	24.26	Y	AJ	
LC 125M 04									2.500	63.50	61.00	1.088	1.044	26.52	Z	AK	
LC 125M 05									3.000	76.20	50.00	0.892	1.193	30.30	AA	AK	
LC 125M 06									3.500	88.90	42.00	0.749	1.460	37.08	AB	AM	
LC 125M 07									4.000	101.60	36.00	0.642	1.567	39.80	AC	AN	
LC 125M 08									4.500	114.30	32.00	0.570	1.755	44.58	AE	AP	
LC 135M 0									1.500	38.10	140.00	2.496	0.783	19.89	AC	AM	Special Order
LC 135M 01									2.000	50.80	100.00	1.783	1.000	25.40	AC	AM	
LC 135M 02									2.250	57.15	88.00	1.569	1.098	27.89	AD	AN	
LC 135M 03									2.500	63.50	78.00	1.391	1.205	30.61	AE	AO	
LC 135M 04	1.095	27.81	1.125	28.58	.135	3.43	100.000	45.290	3.000	76.20	64.00	1.141	1.425	36.20	AG	AP	
LC 135M 05									3.500	88.90	53.00	0.945	1.665	42.49	AJ	AR	
LC 135M 06									4.000	101.60	46.00	0.820	1.868	47.45	AJ	AR	
LC 135M 07									4.500	114.30	40.00	0.713	2.063	52.40	AL	AT	
LC 135M 08									5.000	127.00	36.00	0.642	2.302	58.47	AM	AU	



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
															M	S	S316
LC 085N 01	1.218	30.94	1.250	31.75	.085	2.16	21.230	9.630	0.875	22.23	36.60	0.654	0.304	7.72	T	X	Special Order
LC 085N 02									1.000	25.40	31.10	0.555	0.327	8.30	T	X	
LC 085N 03									1.500	38.10	19.40	0.346	0.418	10.62	T	X	
LC 085N 04									2.000	50.80	14.10	0.252	0.509	12.94	T	X	
LC 085N 05									2.500	63.50	11.10	0.198	0.600	15.23	W	Z	
LC 085N 06									3.000	76.20	9.10	0.163	0.693	17.60	W	AC	
LC 085N 07									3.500	88.90	7.80	0.139	0.779	19.80	W	AC	
LC 085N 08									4.000	101.60	6.70	0.120	0.879	22.32	W	AC	
LC 085N 09									4.500	114.30	6.00	0.107	0.961	24.40	Z	AC	
LC 085N 10									5.000	127.00	5.30	0.095	1.064	27.04	Z	AC	
LC 095N 01	1.218	30.94	1.250	31.75	.095	2.44	32.070	14.550	0.875	22.23	59.60	1.064	0.337	8.57	T	X	Special Order
LC 095N 02									1.000	25.40	50.40	0.900	0.363	9.22	T	X	
LC 095N 03									1.250	31.75	38.50	0.688	0.415	10.54	T	X	
LC 095N 04									1.500	38.10	31.10	0.555	0.467	11.86	T	X	
LC 095N 05									1.750	44.45	26.10	0.466	0.519	13.19	T	X	
LC 095N 06									2.000	50.80	22.50	0.402	0.571	14.50	T	X	
LC 095N 07									2.250	57.15	19.80	0.354	0.622	15.80	T	X	
LC 095N 08									2.500	63.50	17.60	0.314	0.675	17.15	W	Z	
LC 095N 09									2.750	69.85	15.90	0.284	0.727	18.46	W	AC	
LC 095N 10									3.000	76.20	14.50	0.259	0.778	19.76	W	AC	
LC 095N 11									3.500	88.90	12.30	0.220	0.882	22.40	W	AC	
LC 095N 12									4.000	101.60	10.70	0.191	0.985	25.01	W	AC	
LC 095N 13									4.500	114.30	9.50	0.170	1.084	27.54	Z	AC	
LC 095N 14									5.000	127.00	8.50	0.152	1.189	30.20	Z	AC	
LC 105N 01	1.218	30.94	1.250	31.75	.105	2.67	41.630	18.880	0.875	22.23	82.50	1.473	0.382	9.71	W	AD	Special Order
LC 105N 02									1.000	25.40	69.50	1.241	0.414	10.50	W	AD	
LC 105N 03									1.250	31.75	52.80	0.943	0.476	12.09	W	AD	
LC 105N 04									1.500	38.10	42.50	0.759	0.539	13.69	W	AD	
LC 105N 05									2.000	50.80	30.70	0.548	0.663	16.83	X	AE	
LC 105N 06									2.500	63.50	24.00	0.429	0.787	20.00	Y	AJ	
LC 105N 07									3.000	76.20	19.70	0.352	0.912	23.17	AA	AL	
LC 105N 08									3.500	88.90	16.70	0.298	1.037	26.34	AB	AM	
LC 105N 09									4.000	101.60	14.50	0.259	1.162	29.50	AD	AN	
LC 105N 10									4.500	114.30	12.80	0.229	1.287	32.69	AE	AO	
LC 105N 11									5.000	127.00	11.50	0.205	1.408	35.77	AE	AO	
LC 112N 00	1.218	30.94	1.250	31.75	.112	2.84	52.000	23.600	0.875	22.23	108.75	1.942	0.408	10.37	X	AE	Special Order
LC 112N 0A									1.000	25.40	91.12	1.627	0.442	11.24	X	AE	
LC 112N 0									1.250	31.75	69.00	1.232	0.510	12.96	X	AE	
LC 112N 01									1.500	38.10	55.42	0.990	0.579	14.70	X	AE	
LC 112N 02									2.000	50.80	39.82	0.710	0.715	18.16	Y	AG	
LC 112N 03									2.500	63.50	31.07	0.550	0.851	21.63	Z	AK	
LC 112N 04									3.000	76.20	25.48	0.450	0.988	25.09	AB	AM	
LC 112N 05									3.500	88.90	21.59	0.390	1.124	28.55	AC	AN	
LC 112N 06									4.000	101.60	18.73	0.330	1.261	32.02	AE	AO	

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.


CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
															M	S	S316
LC 125N 00									0.875	22.23	169.00	3.018	0.462	11.74	Y	AG	Special Order
LC 125N 0A									1.000	25.40	141.00	2.518	0.503	12.77	Y	AG	
LC 125N 0									1.250	31.75	105.50	1.884	0.586	14.87	Z	AG	
LC 125N 01									1.500	38.10	84.48	1.510	0.667	16.94	Z	AJ	
LC 125N 02									2.000	50.80	60.34	1.080	0.831	21.11	AA	AK	
LC 125N 2A									2.250	57.15	52.75	0.942	0.914	23.20	AB	AL	
LC 125N 03	1.218	30.94	1.250	31.75	.125	3.18	72.000	32.660	2.500	63.50	46.93	0.840	0.995	25.27	AB	AL	
LC 125N 04									3.000	76.20	38.40	0.690	1.159	29.43	AC	AM	
LC 125N 05									3.500	88.90	32.49	0.580	1.322	33.59	AD	AN	
LC 125N 06									4.000	101.60	28.16	0.500	1.486	37.75	AG	AO	
LC 125N 07									4.500	114.30	24.87	0.444	1.649	41.88	AG	AO	Special Order
LC 125N 08									5.000	127.00	22.25	0.397	1.813	46.04	AG	AP	
LC 135N 00									0.875	22.23	250.00	4.464	0.487	12.37	AC	AN	
LC 135N 0A									1.000	25.40	207.00	3.697	0.531	13.48	AC	AN	
LC 135N 0									1.250	31.75	154.00	2.750	0.617	15.68	AC	AN	
LC 135N 01									1.500	38.10	122.85	2.194	0.683	17.35	AC	AN	
LC 135N 02	1.218	30.94	1.250	31.75	.135	3.43	100.360	45.520	2.000	50.80	87.34	1.560	0.851	21.61	AC	AN	
LC 135N 03									2.500	63.50	67.76	1.210	1.019	25.88	AE	AN	
LC 135N 04									3.000	76.20	55.35	0.988	1.187	30.14	AG	AP	
LC 135N 05									3.500	88.90	46.78	0.835	1.355	34.41	AJ	AS	
LC 135N 06									4.000	101.60	40.51	0.723	1.523	38.67	AJ	AS	
LC 112P 01									1.500	38.10	41.30	0.738	0.489	12.41	AA	AJ	Special Order
LC 112P 02									2.000	50.80	29.60	0.529	0.591	15.00	AC	AK	
LC 112P 03	1.460	37.08	1.500	38.10	.112	2.84	42.230	19.160	2.500	63.50	23.10	0.413	0.692	17.57	AC	AL	
LC 112P 04									3.000	76.20	19.00	0.339	0.791	20.10	AC	AL	
LC 112P 05									3.500	88.90	16.10	0.288	0.892	22.67	AD	AN	
LC 112P 06									4.000	101.60	13.90	0.248	0.997	25.33	AG	AO	
LC 125P 01									1.500	38.10	60.70	1.084	0.570	14.49	AA	AK	Special Order
LC 125P 02									2.000	50.80	43.40	0.775	0.695	17.66	AB	AL	
LC 125P 03	1.460	37.08	1.500	38.10	.125	3.18	57.440	26.050	2.500	63.50	33.70	0.602	0.821	20.85	AC	AM	
LC 125P 04									3.000	76.20	27.60	0.493	0.946	24.02	AD	AM	
LC 125P 05									3.500	88.90	23.30	0.416	1.073	27.24	AE	AO	
LC 125P 06									4.000	101.60	20.20	0.361	1.198	30.42	AG	AP	
LC 135P 01									1.500	38.10	80.30	1.434	0.634	16.09	AD	AO	Special Order
LC 135P 02									2.000	50.80	57.10	1.020	0.778	19.76	AE	AO	
LC 135P 03	1.460	37.08	1.500	38.10	.135	3.43	70.000	31.750	2.500	63.50	44.30	0.791	0.922	23.43	AG	AR	
LC 135P 04									3.000	76.20	36.20	0.646	1.067	27.09	AJ	AS	
LC 135P 05									3.500	88.90	30.60	0.546	1.211	30.75	AJ	AT	
LC 135P 06									4.000	101.60	26.50	0.473	1.355	34.42	AK	AR	



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (INCH)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP		
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*	316 Stainless
LC 135Q 01									1.500	38.10	64.40	1.150	0.554	14.07	AD	AS	Special Order
LC 135Q 02									2.000	50.80	45.80	0.818	0.666	16.91	AK	AT	
LC 135Q 03									2.500	63.50	35.50	0.634	0.778	19.77	AL	AW	
LC 135Q 04	1.687	42.85	1.750	44.45	.135	3.43	61.890	28.070	3.000	76.20	29.00	0.518	0.891	22.62	AL	AX	
LC 135Q 05									3.500	88.90	24.50	0.438	1.003	25.48	AL	AY	
LC 135Q 06									4.000	101.60	21.20	0.379	1.116	28.34	AM	AZ	
LC 135Q 07									4.500	114.30	18.70	0.334	1.228	31.19	AM	AZ	
LC 135Q 08									5.000	127.00	16.70	0.298	1.342	34.08	AM	AZ	

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.


CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (METRIC)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		NOMINAL WIRE DIAMETER		TO WORK OVER ROD DIAMETER		APPROX. LOAD AT SOLID HGT.		NOMINAL FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	MM	IN.	MM	IN.	MM	IN.	MM	IN.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	M	S
LCM035A 01	3.00	.118	3.20	.126	.35	.014	2.10	.083	8.14	1.83	6.50	0.256	1.91	10.88	2.40	0.094	F	F
LCM035A 02											8.00	0.315	1.51	8.65	2.80	0.110	F	F
LCM035A 03											9.50	0.374	1.26	7.17	3.20	0.126	F	F
LCM035A 04											11.00	0.433	1.07	6.13	3.60	0.142	F	F
LCM035A 05											12.50	0.492	0.94	5.35	4.00	0.157	F	F
LCM035A 06											14.00	0.551	0.83	4.75	4.40	0.173	F	F
LCM035A 07											15.50	0.610	0.75	4.27	4.80	0.189	F	F
LCM035A 08											17.00	0.669	0.68	3.87	5.25	0.207	F	F
LCM035A 09											19.00	0.748	0.60	3.45	5.80	0.228	F	F
LCM035A 10											25.00	0.984	0.46	2.60	7.40	0.291	F	F
LCM035A 11											27.50	1.083	0.41	2.36	8.15	0.321	F	F
LCM035A 12											30.00	1.181	0.38	2.15	8.85	0.348	F	F
LCM035A 13											40.00	1.575	0.28	1.61	11.60	0.457	F	F
LCM050A 01	3.00	.118	3.20	.126	.50	.020	1.80	.071	20.50	4.61	6.50	0.256	7.50	42.81	3.76	0.148	F	F
LCM050A 02											8.00	0.315	5.89	33.64	4.52	0.178	F	F
LCM050A 03											9.50	0.374	4.85	27.70	5.26	0.207	F	F
LCM050A 04											11.00	0.433	4.12	23.54	6.02	0.237	F	F
LCM050A 05											12.50	0.492	3.58	20.47	6.76	0.266	F	F
LCM050A 06											14.00	0.551	3.17	18.11	7.52	0.296	F	F
LCM050A 07											15.50	0.610	2.84	16.24	8.28	0.326	F	F
LCM050A 08											17.00	0.669	2.58	14.72	9.02	0.355	F	F
LCM050A 09											19.00	0.748	2.29	13.08	10.03	0.395	F	F
LCM050A 10											25.00	0.984	1.72	9.81	13.03	0.513	F	F
LCM050A 11											27.50	1.083	1.56	8.88	14.30	0.563	F	F
LCM050A 12											30.00	1.181	1.42	8.12	15.54	0.612	F	F
LCM050A 13											40.00	1.575	1.06	6.04	20.55	0.809	F	F
LCM060AB 01	3.70	.146	4.00	.158	.60	.024	2.20	.087	22.60	5.08	6.50	0.256	9.35	53.37	4.09	0.161	F	F
LCM060AB 02											8.00	0.315	7.29	41.58	4.90	0.193	F	F
LCM060AB 03											9.50	0.374	5.97	34.07	5.72	0.225	F	F
LCM060AB 04											11.00	0.433	5.06	28.85	6.55	0.258	F	F
LCM060AB 05											12.50	0.492	4.39	25.02	7.37	0.290	F	F
LCM060AB 06											14.00	0.551	3.87	22.09	8.18	0.322	F	F
LCM060AB 07											15.50	0.610	3.47	19.77	8.99	0.354	F	F
LCM060AB 08											17.00	0.669	3.14	17.90	9.80	0.386	F	F
LCM060AB 09											19.00	0.748	2.79	15.89	10.90	0.429	F	F
LCM060AB 10											25.00	0.984	2.08	11.88	14.17	0.558	F	F
LCM060AB 11											27.50	1.083	1.88	10.75	15.54	0.612	F	F
LCM060AB 12											30.00	1.181	1.72	9.82	16.89	0.665	F	F
LCM060AB 13											40.00	1.575	1.28	7.29	22.35	0.880	F	F



COMPRESSION SPRINGS

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (METRIC)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		NOMINAL WIRE DIAMETER		TO WORK OVER ROD DIAMETER		APPROX. LOAD AT SOLID HGT.		NOMINAL FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	MM	IN.	MM	IN.	MM	IN.	MM	IN.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	M	S
LCM035B 01	4.60	.181	4.80	.189	.35	.014	3.60	.142	4.90	1.11	6.50	0.256	0.98	5.57	1.42	0.056	F	F
LCM035B 02											8.00	0.315	0.78	4.43	1.60	0.063	F	F
LCM035B 03											9.50	0.374	0.64	3.67	1.80	0.071	F	F
LCM035B 04											11.00	0.433	0.55	3.14	1.98	0.078	F	F
LCM035B 05											12.50	0.492	0.48	2.74	2.18	0.086	F	F
LCM035B 06											14.00	0.551	0.43	2.43	2.36	0.093	F	F
LCM035B 07											15.50	0.610	0.38	2.18	2.54	0.100	F	F
LCM035B 08											17.00	0.669	0.35	1.98	2.74	0.108	F	F
LCM035B 09											19.00	0.748	0.31	1.77	3.00	0.118	F	F
LCM035B 10											25.00	0.984	0.23	1.33	3.73	0.147	F	F
LCM035B 11											30.00	1.181	0.19	1.10	4.37	0.172	F	F
LCM035B 12											40.00	1.575	0.14	0.82	5.61	0.221	F	F
LCM045B 01	4.60	.181	4.80	.189	.45	.018	3.40	.134	10.80	2.43	6.50	0.256	2.40	13.73	2.01	0.079	F	F
LCM045B 02											8.00	0.315	1.90	10.83	2.31	0.091	F	F
LCM045B 03											9.50	0.374	1.57	8.94	2.62	0.103	F	F
LCM045B 04											11.00	0.433	1.33	7.61	2.90	0.114	F	F
LCM045B 05											12.50	0.492	1.16	6.63	3.20	0.126	F	F
LCM045B 06											14.00	0.551	1.03	5.87	3.51	0.138	F	F
LCM045B 07											15.50	0.610	0.92	5.27	3.78	0.149	F	F
LCM045B 08											17.00	0.669	0.84	4.78	4.09	0.161	F	F
LCM045B 09											19.00	0.748	0.74	4.25	4.50	0.177	F	F
LCM045B 10											25.00	0.984	0.56	3.19	5.69	0.224	F	F
LCM045B 11											30.00	1.181	0.46	2.64	6.68	0.263	F	F
LCM045B 12											40.00	1.575	0.35	1.97	8.66	0.341	F	F
LCM055B 01	4.60	.181	4.80	.189	.55	.022	3.20	.126	17.65	3.97	6.50	0.256	4.72	26.96	2.77	0.109	F	F
LCM055B 02											8.00	0.315	3.70	21.10	3.23	0.127	F	F
LCM055B 03											9.50	0.374	3.04	17.33	3.68	0.145	F	F
LCM055B 04											11.00	0.433	2.57	14.70	4.14	0.163	F	F
LCM055B 05											12.50	0.492	2.24	12.77	4.60	0.181	F	F
LCM055B 06											14.00	0.551	1.98	11.28	5.05	0.199	F	F
LCM055B 07											15.50	0.610	1.77	10.11	5.54	0.218	F	F
LCM055B 08											17.00	0.669	1.60	9.16	5.99	0.236	F	F
LCM055B 09											19.00	0.748	1.42	8.13	6.60	0.260	F	F
LCM055B 10											25.00	0.984	1.07	6.09	8.43	0.332	F	F
LCM055B 11											27.50	1.083	0.96	5.51	9.22	0.363	F	F
LCM055B 12											30.00	1.181	0.88	5.04	9.98	0.393	F	F
LCM055B 13											40.00	1.575	0.65	3.74	13.06	0.514	F	F

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (METRIC)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		NOMINAL WIRE DIAMETER		TO WORK OVER ROD DIAMETER		APPROX. LOAD AT SOLID HGT.		NOMINAL FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	MM	IN.	MM	IN.	MM	IN.	MM	IN.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	M	S
LCM060B 01	4.60	.181	4.80	.189	.60	.024	3.10	.122	23.50	5.30	6.50	0.256	6.81	38.91	3.05	0.120	F	F
LCM060B 02											8.00	0.315	5.31	30.33	3.56	0.140	F	F
LCM060B 03											9.50	0.374	4.35	24.85	4.09	0.161	F	F
LCM060B 04											11.00	0.433	3.68	21.04	4.60	0.181	F	F
LCM060B 05											12.50	0.492	3.20	18.25	5.13	0.202	F	F
LCM060B 06											14.00	0.551	2.82	16.11	5.66	0.223	F	F
LCM060B 07											15.50	0.610	2.53	14.42	6.17	0.243	F	F
LCM060B 08											17.00	0.669	2.29	13.05	6.71	0.264	F	F
LCM060B 09											19.00	0.748	2.03	11.59	7.39	0.291	F	F
LCM060B 10											25.00	0.984	1.52	8.67	9.47	0.373	F	F
LCM060B 11											27.50	1.083	1.37	7.84	10.34	0.407	F	F
LCM060B 12											30.00	1.181	1.25	7.16	11.23	0.442	F	F
LCM060B 13											40.00	1.575	0.93	5.32	16.08	0.633	F	F
LCM060B 14											50.00	1.969	0.74	4.23	18.19	0.716	F	F
LCM080B 01	4.60	.181	4.80	.189	.80	.032	2.70	.106	55.90	12.57	6.50	0.256	24.01	137.07	4.17	0.164	F	F
LCM080B 02											8.00	0.315	18.38	104.94	4.95	0.195	F	F
LCM080B 03											9.50	0.374	14.89	85.02	5.74	0.226	F	F
LCM080B 04											11.00	0.433	12.51	71.45	6.53	0.257	F	F
LCM080B 05											12.50	0.492	10.79	61.62	7.32	0.288	F	F
LCM080B 06											14.00	0.551	9.48	54.13	8.10	0.319	F	F
LCM080B 07											15.50	0.610	8.46	48.32	8.89	0.350	F	F
LCM080B 08											17.00	0.669	7.64	43.61	9.68	0.381	F	F
LCM080B 09											19.00	0.748	6.76	38.60	10.74	0.423	F	F
LCM080B 10											25.00	0.984	5.03	28.70	13.89	0.547	F	F
LCM080B 11											27.50	1.083	4.54	25.93	15.19	0.598	F	F
LCM080B 12											30.00	1.181	4.14	23.65	16.51	0.650	G	G
LCM080B 13											40.00	1.575	3.06	17.49	21.77	0.857	G	G
LCM080B 14											50.00	1.969	2.43	13.88	27.00	1.063	G	G
LCM050C 01	6.00	.236	6.40	.252	.50	.020	4.60	.180	8.85	1.99	6.50	0.256	1.96	11.18	1.98	0.078	F	F
LCM050C 02											8.00	0.315	1.54	8.79	2.26	0.089	F	F
LCM050C 03											9.50	0.374	1.27	7.24	2.54	0.100	F	F
LCM050C 04											11.00	0.433	1.08	6.15	2.79	0.110	F	F
LCM050C 05											12.50	0.492	0.94	5.35	3.07	0.121	F	F
LCM050C 06											14.00	0.551	0.83	4.73	3.35	0.132	F	F
LCM050C 07											15.50	0.610	0.74	4.24	3.61	0.142	F	F
LCM050C 08											17.00	0.669	0.67	3.84	3.89	0.153	F	F
LCM050C 09											19.00	0.748	0.60	3.42	4.24	0.167	F	F
LCM050C 10											25.00	0.984	0.45	2.56	5.33	0.210	G	G
LCM050C 11											27.50	1.083	0.41	2.32	5.77	0.227	G	G
LCM050C 12											30.00	1.181	0.37	2.12	6.22	0.245	G	G
LCM050C 13											35.00	1.378	0.32	1.81	7.14	0.281	G	G
LCM050C 14											40.00	1.575	0.28	1.58	8.03	0.316	G	G
LCM050C 15											45.00	1.772	0.25	1.40	8.94	0.352	G	G
LCM050C 16											50.00	1.969	0.22	1.26	9.83	0.387	G	G

COMPRESSION SPRINGS



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (METRIC)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		NOMINAL WIRE DIAMETER		TO WORK OVER ROD DIAMETER		APPROX. LOAD AT SOLID HGT.		NOMINAL FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	MM	IN.	MM	IN.	MM	IN.	MM	IN.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	M	S
LCM060C 01	6.00	.236	6.40	.252	.60	.024	4.40	.173	14.70	3.30	6.50	0.256	3.74	21.35	2.57	0.101	F	F
LCM060C 02											8.00	0.315	2.91	16.64	2.95	0.116	F	F
LCM060C 03											9.50	0.374	2.39	13.63	3.33	0.131	F	F
LCM060C 04											11.00	0.433	2.02	11.55	3.73	0.147	F	F
LCM060C 05											12.50	0.492	1.75	10.01	4.11	0.162	F	F
LCM060C 06											14.00	0.551	1.55	8.84	4.50	0.177	F	F
LCM060C 07											15.50	0.610	1.39	7.91	4.88	0.192	F	F
LCM060C 08											17.00	0.669	1.25	7.16	5.26	0.207	F	F
LCM060C 09											19.00	0.748	1.11	6.36	5.79	0.228	F	F
LCM060C 10											25.00	0.984	0.83	4.76	7.34	0.289	G	G
LCM060C 11											27.50	1.083	0.75	4.30	7.98	0.314	G	G
LCM060C 12											30.00	1.181	0.69	3.93	8.61	0.339	G	G
LCM060C 13											35.00	1.378	0.59	3.35	9.91	0.390	G	G
LCM060C 14											40.00	1.575	0.51	2.92	11.20	0.491	G	G
LCM060C 15											45.00	1.772	0.45	2.58	12.47	0.491	G	G
LCM060C 16											50.00	1.969	0.41	2.32	13.77	0.542	G	G
LCM080C 01	6.00	.236	6.40	.252	.80	.032	4.00	.158	44.10	9.91	6.50	0.256	13.92	79.51	3.33	0.131	F	F
LCM080C 02											8.00	0.315	10.66	60.87	3.86	0.152	F	F
LCM080C 03											9.50	0.374	8.64	49.32	4.39	0.173	F	F
LCM080C 04											11.00	0.433	7.26	41.45	4.93	0.194	F	F
LCM080C 05											12.50	0.492	6.26	35.74	5.46	0.215	F	F
LCM080C 06											14.00	0.551	5.50	31.42	5.97	0.235	F	F
LCM080C 07											15.50	0.610	4.91	28.03	6.50	0.256	F	F
LCM080C 08											17.00	0.669	4.43	25.30	7.04	0.277	F	F
LCM080C 09											19.00	0.748	3.92	22.39	7.75	0.305	F	F
LCM080C 10											25.00	0.984	2.92	16.65	9.86	0.388	F	F
LCM080C 11											27.50	1.083	2.63	15.04	10.74	0.423	G	G
LCM080C 12											30.00	1.181	2.40	13.72	11.63	0.458	G	G
LCM080C 13											35.00	1.378	2.04	11.66	13.39	0.527	G	G
LCM080C 14											40.00	1.575	1.78	10.15	15.16	0.597	G	G
LCM080C 15											45.00	1.772	1.57	8.98	16.92	0.666	G	G
LCM080C 16											50.00	1.969	1.41	8.05	18.69	0.736	G	G

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.


CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (METRIC)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		NOMINAL WIRE DIAMETER		TO WORK OVER ROD DIAMETER		APPROX. LOAD AT SOLID HGT.		NOMINAL FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	MM	IN.	MM	IN.	MM	IN.	MM	IN.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	Music Wire	302 Stainless*
LCM110C 01	6.00	.236	6.40	.252	1.10	.043	3.40	.134	94.20	21.18	8.00	0.315	40.64	232.03	5.69	0.224	F	F
LCM110C 02											9.50	0.374	32.29	184.35	6.58	0.259	F	F
LCM110C 03											11.00	0.433	26.78	152.93	7.49	0.295	F	F
LCM110C 04											12.50	0.492	22.88	130.66	8.38	0.330	F	F
LCM110C 05											14.00	0.551	19.97	114.05	9.30	0.366	F	F
LCM110C 06											15.50	0.610	17.72	101.19	10.19	0.401	F	F
LCM110C 07											17.00	0.669	15.92	90.93	11.10	0.437	F	F
LCM110C 08											19.00	0.748	14.03	80.11	12.29	0.484	F	F
LCM110C 09											22.00	0.866	11.90	67.97	14.10	0.555	F	F
LCM110C 10											25.00	0.984	10.34	59.03	15.90	0.626	F	F
LCM110C 11											27.50	1.083	9.32	53.19	17.40	0.685	F	F
LCM110C 12											30.00	1.181	8.48	48.41	18.90	0.744	F	F
LCM110C 13											35.00	1.378	7.19	41.03	21.89	0.862	F	F
LCM110C 14											40.00	1.575	6.23	35.60	24.89	0.980	J	J
LCM110C 15											45.00	1.772	5.51	31.44	27.91	1.099	J	J
LCM110C 16											50.00	1.969	4.93	28.15	30.91	1.217	J	J
LCM110C 17											55.00	2.165	4.46	25.49	33.91	1.335	J	J
LCM110C 18											60.00	2.362	4.08	23.28	36.91	1.453	J	J
LCM110C 19											65.00	2.559	3.75	21.43	39.90	1.571	J	J
LCM055D 01	7.50	.295	8.00	.315	.55	.022	5.90	.232	10.80	2.43	9.50	0.374	1.47	8.39	2.16	0.085	F	F
LCM055D 02											11.00	0.433	1.25	7.11	2.34	0.092	F	F
LCM055D 03											12.50	0.492	1.08	6.18	2.54	0.100	F	F
LCM055D 04											14.00	0.551	0.96	5.46	2.72	0.107	F	F
LCM055D 05											15.50	0.610	0.86	4.89	2.92	0.115	F	F
LCM055D 06											17.00	0.669	0.78	4.43	3.10	0.122	F	F
LCM055D 07											19.00	0.748	0.69	3.94	3.35	0.132	F	F
LCM055D 08											21.00	0.827	0.62	3.54	3.61	0.142	F	F
LCM055D 09											23.00	0.906	0.56	3.22	3.86	0.152	F	F
LCM055D 10											25.00	0.984	0.52	2.95	4.11	0.162	F	F
LCM055D 11											27.50	1.083	0.47	2.67	4.42	0.174	F	F
LCM055D 12											30.00	1.181	0.43	2.44	4.72	0.186	F	F
LCM055D 13											35.00	1.378	0.36	2.08	5.36	0.211	F	F
LCM055D 14											40.00	1.575	0.32	1.81	5.99	0.236	G	G
LCM055D 15											45.00	1.772	0.28	1.60	6.60	0.260	G	G
LCM055D 16											50.00	1.969	0.25	1.44	7.24	0.285	G	G
LCM055D 17											55.00	2.165	0.23	1.31	7.87	0.310	G	G
LCM055D 18											60.00	2.362	0.21	1.20	8.51	0.335	G	G
LCM055D 19											65.00	2.559	0.19	1.10	9.12	0.359	G	G



COMPRESSION SPRINGS

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (METRIC)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		NOMINAL WIRE DIAMETER		TO WORK OVER ROD DIAMETER		APPROX. LOAD AT SOLID HGT.		NOMINAL FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	MM	IN.	MM	IN.	MM	IN.	MM	IN.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	M	S
LCM065D 01	7.50	.295	8.00	.315	.65	.026	5.70	.224	18.65	4.19	9.50	0.374	2.73	15.57	2.67	0.105	F	F
LCM065D 02											11.00	0.433	2.31	13.17	2.92	0.115	F	F
LCM065D 03											12.50	0.492	2.00	11.40	3.18	0.125	F	F
LCM065D 04											14.00	0.551	1.76	10.06	3.43	0.135	F	F
LCM065D 05											15.50	0.610	1.57	8.99	3.66	0.144	F	F
LCM065D 06											17.00	0.669	1.42	8.13	3.91	0.154	F	F
LCM065D 07											19.00	0.748	1.26	7.22	4.24	0.167	F	F
LCM065D 08											21.00	0.827	1.13	6.48	4.60	0.181	F	F
LCM065D 09											23.00	0.906	1.03	5.89	4.93	0.194	F	F
LCM065D 10											25.00	0.984	0.94	5.39	5.26	0.207	F	F
LCM065D 11											27.50	1.083	0.85	4.87	5.66	0.223	F	F
LCM065D 12											30.00	1.181	0.78	4.45	6.10	0.240	F	F
LCM065D 13											35.00	1.378	0.66	3.79	6.93	0.273	F	F
LCM065D 14											40.00	1.575	0.58	3.30	7.75	0.305	F	F
LCM065D 15											45.00	1.772	0.51	2.92	8.59	0.338	F	F
LCM065D 16											50.00	1.969	0.46	2.62	9.42	0.371	F	F
LCM065D 17											55.00	2.165	0.42	2.38	10.26	0.404	G	G
LCM065D 18											60.00	2.362	0.38	2.18	11.10	0.437	G	G
LCM065D 19											65.00	2.559	0.35	2.00	11.94	0.470	G	G
LCM080D 01	7.50	.295	8.00	.315	.80	.032	5.40	.213	33.40	7.51	9.50	0.374	5.65	32.24	3.61	0.142	F	F
LCM080D 02											11.00	0.433	4.75	27.10	3.96	0.156	F	F
LCM080D 03											12.50	0.492	4.09	23.37	4.34	0.171	F	F
LCM080D 04											14.00	0.551	3.60	20.54	4.72	0.186	F	F
LCM080D 05											15.50	0.610	3.21	18.32	5.11	0.201	F	F
LCM080D 06											17.00	0.669	2.90	16.54	5.49	0.216	F	F
LCM080D 07											19.00	0.748	2.56	14.64	5.99	0.236	F	F
LCM080D 08											21.00	0.827	2.30	13.13	6.50	0.256	F	F
LCM080D 09											23.00	0.906	2.08	11.90	7.01	0.276	F	F
LCM080D 10											25.00	0.984	1.91	10.89	7.52	0.296	F	F
LCM080D 11											27.50	1.083	1.72	9.83	8.13	0.320	F	F
LCM080D 12											30.00	1.181	1.57	8.97	8.76	0.345	F	F
LCM080D 13											35.00	1.378	1.34	7.63	10.03	0.395	F	F
LCM080D 14											40.00	1.575	1.16	6.63	11.30	0.445	F	F
LCM080D 15											45.00	1.772	1.03	5.87	12.55	0.494	F	F
LCM080D 16											50.00	1.969	0.92	5.26	13.82	0.544	F	F
LCM080D 17											55.00	2.165	0.84	4.77	15.09	0.594	G	G
LCM080D 18											60.00	2.362	0.76	4.36	16.36	0.644	G	G
LCM080D 19											65.00	2.559	0.70	4.02	17.60	0.693	G	G

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (METRIC)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		NOMINAL WIRE DIAMETER		TO WORK OVER ROD DIAMETER		APPROX. LOAD AT SOLID HGT.		NOMINAL FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	MM	IN.	MM	IN.	MM	IN.	MM	IN.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	Music Wire	302 Stainless*
LCM095D 01	7.50	.295	8.00	.315	.95	.037	5.10	.201	54.00	12.14	9.50	0.374	10.84	61.91	4.52	0.178	F	F
LCM095D 02											11.00	0.433	9.06	51.71	5.05	0.199	F	F
LCM095D 03											12.50	0.492	7.77	44.39	5.56	0.219	F	F
LCM095D 04											14.00	0.551	6.81	38.89	6.07	0.239	F	F
LCM095D 05											15.50	0.610	6.06	34.60	6.60	0.260	F	F
LCM095D 06											17.00	0.669	5.46	31.16	7.11	0.280	F	F
LCM095D 07											19.00	0.748	4.82	27.52	7.80	0.307	F	F
LCM095D 08											21.00	0.827	4.32	24.64	8.51	0.335	F	F
LCM095D 09											23.00	0.906	3.91	22.30	9.19	0.362	F	F
LCM095D 10											25.00	0.984	3.57	20.37	9.88	0.389	F	F
LCM095D 11											27.50	1.083	3.22	18.38	10.74	0.423	F	F
LCM095D 12											30.00	1.181	2.93	16.75	11.61	0.457	F	F
LCM095D 13											35.00	1.378	2.49	14.22	13.34	0.525	F	F
LCM095D 14											40.00	1.575	2.16	12.35	15.06	0.593	G	G
LCM095D 15											45.00	1.772	1.91	10.92	16.79	0.661	G	G
LCM095D 16											50.00	1.969	1.71	9.78	18.52	0.729	G	G
LCM095D 17											55.00	2.165	1.55	8.86	20.24	0.797	G	G
LCM095D 18											60.00	2.362	1.42	8.10	21.97	0.865	G	G
LCM095D 19											65.00	2.559	1.31	7.46	23.70	0.933	G	G
LCM065E 01	9.00	.354	9.50	.374	.65	.026	7.20	.283	15.20	3.42	12.50	0.492	1.54	8.80	2.64	0.104	F	F
LCM065E 02											14.00	0.551	1.36	7.76	2.82	0.111	F	F
LCM065E 03											15.50	0.610	1.22	6.94	3.00	0.118	F	F
LCM065E 04											17.00	0.669	1.10	6.28	3.18	0.125	F	F
LCM065E 05											19.00	0.748	0.98	5.57	3.40	0.134	F	F
LCM065E 06											21.00	0.827	0.88	5.00	3.66	0.144	F	F
LCM065E 07											23.00	0.906	0.80	4.54	3.89	0.153	F	F
LCM065E 08											25.00	0.984	0.73	4.16	4.14	0.163	F	F
LCM065E 09											27.50	1.083	0.66	3.76	4.42	0.174	F	F
LCM065E 10											30.00	1.181	0.60	3.43	4.72	0.186	F	F
LCM065E 11											35.00	1.378	0.51	2.92	5.33	0.210	F	F
LCM065E 12											40.00	1.575	0.45	2.55	5.92	0.233	F	F
LCM065E 13											45.00	1.772	0.40	2.26	6.53	0.257	F	F
LCM065E 14											50.00	1.969	0.35	2.02	7.11	0.280	F	F
LCM065E 15											55.00	2.165	0.32	1.84	7.72	0.304	F	F
LCM065E 16											60.00	2.362	0.29	1.68	8.31	0.327	G	G

COMPRESSION SPRINGS



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (METRIC)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		NOMINAL WIRE DIAMETER		TO WORK OVER ROD DIAMETER		APPROX. LOAD AT SOLID HGT.		NOMINAL FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	MM	IN.	MM	IN.	MM	IN.	MM	IN.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	M	S
LCM095E 01	9.00	.354	9.50	.374	.95	.037	6.60	.260	45.10	10.14	11.00	0.433	6.64	37.93	4.22	0.166	F	F
LCM095E 02											12.50	0.492	5.70	32.56	4.60	0.181	F	F
LCM095E 03											14.00	0.551	5.00	28.53	4.98	0.196	F	F
LCM095E 04											15.50	0.610	4.44	25.38	5.36	0.211	F	F
LCM095E 05											17.00	0.669	4.00	22.86	5.74	0.226	F	F
LCM095E 06											19.00	0.748	3.54	20.19	6.25	0.246	F	F
LCM095E 07											21.00	0.827	3.16	18.07	6.76	0.266	F	F
LCM095E 08											23.00	0.906	2.87	16.36	7.26	0.286	F	F
LCM095E 09											25.00	0.984	2.62	14.94	7.77	0.306	F	F
LCM095E 10											27.50	1.083	2.36	13.48	8.41	0.331	F	F
LCM095E 11											30.00	1.181	2.15	12.28	9.02	0.355	F	F
LCM095E 12											35.00	1.378	1.83	10.43	10.29	0.405	F	F
LCM095E 13											40.00	1.575	1.59	9.06	11.56	0.455	G	G
LCM095E 14											45.00	1.772	1.40	8.01	12.83	0.505	G	G
LCM095E 15											50.00	1.969	1.26	7.18	14.10	0.555	G	G
LCM095E 16											55.00	2.165	1.14	6.50	15.37	0.605	G	G
LCM095E 17											60.00	2.362	1.04	5.94	16.51	0.650	G	G
LCM095E 18											65.00	2.559	0.96	5.47	17.91	0.705	G	G
LCM110E 01	9.00	.354	9.50	.374	1.10	.043	6.30	.248	70.60	15.87	11.00	0.433	11.86	67.73	5.05	0.199	F	F
LCM110E 02											12.50	0.492	10.13	57.87	5.54	0.218	F	F
LCM110E 03											14.00	0.551	8.85	50.51	6.02	0.237	F	F
LCM110E 04											15.50	0.610	7.85	44.81	6.50	0.256	F	F
LCM110E 05											17.00	0.669	7.05	40.27	6.99	0.275	F	F
LCM110E 06											19.00	0.748	6.21	35.48	7.65	0.301	F	F
LCM110E 07											21.00	0.827	5.55	31.70	8.28	0.326	F	F
LCM110E 08											23.00	0.906	5.02	28.66	8.94	0.352	F	F
LCM110E 09											25.00	0.984	4.58	26.14	9.58	0.377	F	F
LCM110E 10											27.50	1.083	4.13	23.56	10.39	0.409	F	F
LCM110E 11											30.00	1.181	3.75	21.44	11.20	0.441	F	F
LCM110E 12											35.00	1.378	3.18	18.17	12.80	0.504	F	F
LCM110E 13											40.00	1.575	2.76	15.77	14.43	0.568	G	G
LCM110E 14											45.00	1.772	2.44	13.93	16.05	0.632	G	G
LCM110E 15											50.00	1.969	2.18	12.47	17.68	0.696	G	G
LCM110E 16											55.00	2.165	1.98	11.29	19.28	0.759	G	G
LCM110E 17											60.00	2.362	1.81	10.31	20.90	0.823	G	G
LCM110E 18											65.00	2.559	1.66	9.49	22.53	0.887	G	G

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (METRIC)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

COMPRESSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		NOMINAL WIRE DIAMETER		TO WORK OVER ROD DIAMETER		APPROX. LOAD AT SOLID HGT.		NOMINAL FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	MM	IN.	MM	IN.	MM	IN.	MM	IN.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	M	S
LCM090F 01	10.80	.425	11.30	.445	.90	.035	8.50	.335	27.50	6.18	12.50	0.492	3.15	18.01	3.78	0.149	F	F
LCM090F 02											14.00	0.551	2.77	15.80	4.06	0.160	F	F
LCM090F 03											15.50	0.610	2.46	14.07	4.34	0.171	F	F
LCM090F 04											17.00	0.669	2.22	12.68	4.62	0.182	F	F
LCM090F 05											19.00	0.748	1.96	11.21	5.00	0.197	F	F
LCM090F 06											21.00	0.827	1.75	10.01	5.38	0.212	F	F
LCM090F 07											23.00	0.906	1.59	9.09	5.74	0.226	F	F
LCM090F 08											25.00	0.984	1.46	8.31	6.12	0.241	F	F
LCM090F 09											27.50	1.083	1.31	7.50	6.58	0.259	F	F
LCM090F 10											30.00	1.181	1.20	6.83	7.06	0.278	F	F
LCM090F 11											35.00	1.378	1.02	5.81	8.00	0.315	F	F
LCM090F 12											40.00	1.575	0.88	5.05	8.92	0.351	F	F
LCM090F 13											45.00	1.772	0.78	4.46	9.86	0.388	G	G
LCM090F 14											50.00	1.969	0.70	4.00	10.80	0.425	G	G
LCM130F 01	10.80	.425	11.30	.445	1.30	.051	7.70	.303	83.40	18.75	12.50	0.492	12.94	73.91	6.07	0.239	F	F
LCM130F 02											14.00	0.551	11.24	64.18	6.58	0.259	F	F
LCM130F 03											15.50	0.610	9.93	56.72	7.11	0.280	F	F
LCM130F 04											17.00	0.669	8.90	50.81	7.62	0.300	F	F
LCM130F 05											19.00	0.748	7.81	44.61	8.33	0.328	F	F
LCM130F 06											21.00	0.827	6.96	39.76	9.02	0.355	F	F
LCM130F 07											23.00	0.906	6.28	35.87	9.73	0.383	F	F
LCM130F 08											25.00	0.984	5.72	32.66	10.44	0.411	F	F
LCM130F 09											27.50	1.083	5.15	29.38	11.30	0.445	G	G
LCM130F 10											30.00	1.181	4.68	26.70	12.17	0.479	G	G
LCM130F 11											35.00	1.378	3.95	22.58	13.92	0.548	G	G
LCM130F 12											40.00	1.575	3.43	19.56	15.67	0.617	J	K
LCM130F 13											45.00	1.772	3.02	17.26	17.42	0.686	J	K
LCM130F 14											50.00	1.969	2.70	15.44	19.15	0.754	J	K
LCM130F 15											55.00	2.165	2.44	13.96	20.90	0.823	K	M
LCM130F 16											60.00	2.362	2.23	12.75	22.66	0.892	K	M
LCM095G 01	12.00	.472	12.70	.500	.95	.037	9.60	.378	32.40	7.28	12.50	0.492	3.61	20.63	3.53	0.139	F	F
LCM095G 02											15.50	0.610	2.82	16.08	4.01	0.158	F	F
LCM095G 03											19.00	0.748	2.24	12.79	4.55	0.179	F	F
LCM095G 04											22.00	0.866	1.91	10.88	5.00	0.197	F	F
LCM095G 05											25.00	0.984	1.66	9.47	5.49	0.216	F	F
LCM095G 06											30.00	1.181	1.36	7.78	6.25	0.246	G	G
LCM095G 07											35.00	1.378	1.16	6.61	7.04	0.277	G	G
LCM095G 08											40.00	1.575	1.01	5.74	7.80	0.307	G	G
LCM095G 09											45.00	1.772	0.89	5.07	8.59	0.338	J	J
LCM095G 10											50.00	1.969	0.80	4.55	9.35	0.368	J	J
LCM095G 11											55.00	2.165	0.72	4.12	10.13	0.399	J	J
LCM095G 12											60.00	2.362	0.66	3.76	10.90	0.429	K	K
LCM095G 13											65.00	2.559	0.61	3.47	11.66	0.459	K	K
LCM095G 14											70.00	2.756	0.56	3.21	12.45	0.490	K	K
LCM095G 15											75.00	2.953	0.52	2.99	13.21	0.520	K	K



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (METRIC)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		NOMINAL WIRE DIAMETER		TO WORK OVER ROD DIAMETER		APPROX. LOAD AT SOLID HGT.		NOMINAL FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	MM	IN.	MM	IN.	MM	IN.	MM	IN.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	M	S
LCM140G 01	12.00	.472	12.70	.500	1.40	.055	8.70	.343	88.30	19.85	12.50	0.492	13.91	79.44	6.15	0.242	F	G
LCM140G 02											15.50	0.610	10.63	60.67	7.19	0.283	F	G
LCM140G 03											19.00	0.748	8.33	47.57	8.41	0.331	F	G
LCM140G 04											22.00	0.866	7.03	40.13	9.45	0.372	F	G
LCM140G 05											25.00	0.984	6.08	34.71	10.49	0.413	F	G
LCM140G 06											30.00	1.181	4.96	28.33	12.22	0.481	G	J
LCM140G 07											35.00	1.378	4.19	23.93	13.94	0.549	G	J
LCM140G 08											40.00	1.575	3.63	20.71	15.67	0.617	J	K
LCM140G 09											45.00	1.772	3.20	18.26	17.40	0.685	J	K
LCM140G 10											50.00	1.969	2.86	16.33	19.13	0.753	J	K
LCM140G 11											55.00	2.165	2.58	14.76	20.85	0.821	J	K
LCM140G 12											60.00	2.362	2.36	13.47	22.58	0.889	J	K
LCM140G 13											65.00	2.559	2.17	12.39	24.31	0.957	J	K
LCM140G 14											70.00	2.756	2.01	11.47	26.06	1.026	K	L
LCM140G 15											75.00	2.953	1.87	10.67	27.79	1.094	L	M
LCM110GH 01	13.50	.532	14.30	.563	1.10	.043	10.50	.413	33.40	7.51	12.50	0.492	4.09	23.33	4.34	0.171	F	G
LCM110GH 02											15.50	0.610	3.16	18.07	4.95	0.195	F	G
LCM110GH 03											19.00	0.748	2.50	14.30	5.69	0.224	F	G
LCM110GH 04											22.00	0.866	2.13	12.14	6.31	0.248	F	G
LCM110GH 05											25.00	0.984	1.85	10.54	6.93	0.273	F	G
LCM110GH 06											30.00	1.181	1.51	8.64	7.98	0.314	G	J
LCM110GH 07											35.00	1.378	1.28	7.33	9.02	0.355	G	J
LCM110GH 08											40.00	1.575	1.11	6.36	10.03	0.395	G	J
LCM110GH 09											45.00	1.772	0.98	5.61	11.07	0.436	G	J
LCM110GH 10											50.00	1.969	0.88	5.03	12.12	0.477	G	J
LCM110GH 11											55.00	2.165	0.80	4.55	13.16	0.518	G	J
LCM110GH 12											60.00	2.362	0.73	4.16	14.20	0.559	G	J
LCM110GH 13											65.00	2.559	0.67	3.83	15.24	0.600	G	J
LCM110GH 14											70.00	2.756	0.62	3.54	16.28	0.641	G	J
LCM110GH 15											75.00	2.953	0.58	3.30	17.30	0.681	G	J
LCM120H 01	15.00	.591	16.00	.630	1.20	.047	11.80	.465	33.40	7.51	12.50	0.492	4.27	24.38	4.70	0.185	F	G
LCM120H 02											15.50	0.610	3.29	18.80	5.38	0.212	F	G
LCM120H 03											19.00	0.748	2.60	14.84	6.17	0.243	F	G
LCM120H 04											22.00	0.866	2.20	12.56	6.86	0.270	F	G
LCM120H 05											25.00	0.984	1.91	10.90	7.52	0.296	F	G
LCM120H 06											30.00	1.181	1.56	8.92	8.66	0.341	G	J
LCM120H 07											35.00	1.378	1.32	7.55	9.80	0.386	G	J
LCM120H 08											40.00	1.575	1.15	6.55	10.95	0.431	G	J
LCM120H 09											45.00	1.772	1.01	5.78	12.07	0.475	J	K
LCM120H 10											50.00	1.969	0.91	5.17	13.21	0.520	J	K
LCM120H 11											55.00	2.165	0.82	4.68	14.35	0.565	J	K
LCM120H 12											60.00	2.362	0.75	4.28	15.47	0.609	J	K
LCM120H 13											65.00	2.559	0.69	3.93	16.61	0.654	J	K
LCM120H 14											70.00	2.756	0.64	3.64	17.75	0.699	K	L
LCM120H 15											80.00	3.150	0.56	3.17	20.02	0.788	K	L
LCM120H 16											90.00	3.543	0.49	2.81	22.28	0.877	K	L

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: STANDARD SERIES (METRIC)

ENDS ARE GROUND • Music Wire (Plated) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		NOMINAL WIRE DIAMETER		TO WORK OVER ROD DIAMETER		APPROX. LOAD AT SOLID HGT.		NOMINAL FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	MM	IN.	MM	IN.	MM	IN.	MM	IN.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	M	S
LCM160H 01	15.00	.591	16.00	.630	1.60	.063	11.00	.433	102.00	22.93	15.50	0.610	11.95	68.26	6.96	0.274	F	J
LCM160H 02											19.00	0.748	9.31	53.14	8.05	0.317	F	J
LCM160H 03											22.00	0.866	7.82	44.66	8.89	0.350	F	J
LCM160H 04											25.00	0.984	6.75	38.52	9.88	0.389	G	K
LCM160H 05											30.00	1.181	5.49	31.33	11.40	0.449	G	K
LCM160H 06											35.00	1.378	4.62	26.40	12.95	0.510	G	K
LCM160H 07											40.00	1.575	4.00	22.82	14.48	0.570	J	L
LCM160H 08											45.00	1.772	3.52	20.09	16.00	0.630	J	L
LCM160H 09											50.00	1.969	3.14	17.94	17.55	0.691	J	L
LCM160H 10											55.00	2.165	2.84	16.21	19.08	0.751	J	L
LCM160H 11											60.00	2.362	2.59	14.78	20.60	0.811	J	L
LCM160H 12											65.00	2.559	2.38	13.59	22.15	0.872	L	N
LCM160H 13											70.00	2.756	2.20	12.57	23.67	0.932	L	N
LCM160H 14											80.00	3.150	1.91	10.93	26.75	1.053	M	P
LCM160H 15											90.00	3.543	1.69	9.67	29.79	1.173	M	P
LCM140J 01	18.30	.720	19.00	.748	1.40	.055	14.70	.579	57.83	13.00	15.50	0.610	5.46	31.19	4.90	0.193	J	L
LCM140J 02											19.00	0.748	4.28	24.45	5.49	0.216	J	L
LCM140J 03											22.00	0.866	3.61	20.63	5.99	0.236	J	L
LCM140J 04											25.00	0.984	3.12	17.84	6.48	0.255	J	L
LCM140J 05											30.00	1.181	2.55	14.56	7.32	0.288	J	L
LCM140J 06											35.00	1.378	2.15	12.30	8.15	0.321	J	L
LCM140J 07											40.00	1.575	1.87	10.65	8.97	0.353	K	M
LCM140J 08											45.00	1.772	1.64	9.39	9.80	0.386	K	M
LCM140J 09											50.00	1.969	1.47	8.39	10.64	0.419	K	M
LCM140J 10											55.00	2.165	1.33	7.59	11.46	0.451	K	M
LCM140J 11											60.00	2.362	1.21	6.93	12.29	0.484	K	M
LCM140J 12											65.00	2.559	1.12	6.37	13.13	0.517	K	M
LCM140J 13											70.00	2.756	1.03	5.90	13.97	0.550	K	M
LCM140J 14											80.00	3.150	0.90	5.13	15.62	0.615	K	M
LCM200J 01	18.30	.720	19.00	.748	2.00	.079	13.50	.532	172.59	38.80	22.00	0.866	13.83	78.99	9.53	0.375	L	P
LCM200J 02											25.00	0.984	11.86	67.71	10.44	0.411	L	P
LCM200J 03											30.00	1.181	9.58	54.68	11.99	0.472	L	P
LCM200J 04											35.00	1.378	8.03	45.86	13.51	0.532	L	R
LCM200J 05											40.00	1.575	6.92	39.49	15.04	0.592	M	S
LCM200J 06											45.00	1.772	6.07	34.68	16.59	0.653	M	S
LCM200J 07											50.00	1.969	5.41	30.91	18.11	0.713	N	T
LCM200J 08											55.00	2.165	4.88	27.88	19.66	0.774	P	U
LCM200J 09											60.00	2.362	4.45	25.39	21.18	0.834	P	W
LCM200J 10											65.00	2.559	4.08	23.31	22.71	0.894	P	W
LCM200J 11											70.00	2.756	3.77	21.54	24.26	0.955	R	X
LCM200J 12											80.00	3.150	3.28	18.71	27.33	1.076	S	Y
LCM200J 13											90.00	3.543	2.89	16.53	30.38	1.196	T	Z
LCM200J 14											100.00	3.937	2.59	14.81	33.45	1.317	U	AA

COMPRESSION SPRINGS



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

INTRODUCING THE **NON-METALLIC NON-CORRODING NON-CONTAMINATING SPRING.**



REVOLUTIONARY NEW LeeP™ PLASTIC COMPOSITE SPRINGS.

At last! Compression springs that combine the strength of metal with the special attributes of high-performance thermoplastics. LeeP™ Plastic Composite Springs feature patent pending designs molded in Ultem* resins. This ground-breaking line meets the needs of applications such as medical, food-processing,

marine, and electronics where non-corroding, high temperature resistant, non-conductive, inert materials are preferred. LeeP springs are stocked in a variety of standard sizes, each in an easy-to-identify rainbow of strengths. **Call or email us today to learn more.**

Lee Spring®

leespring.com

*Not just a better spring,
a better spring company.*


*Trademark of SABIC Innovative Plastics IP BV.

COMPRESSION SPRINGS: HEAVY DUTY SERIES (INCH)

ENDS ARE GROUND • Music Wire/Oil Tempered MB (Shotpeened, Plated) or Stainless Steel (Shotpeened, Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*
LHC 142H 01	1.095	27.81	1.125	28.58	.142	3.61	100.00	45.290	2.000	50.80	115.00	2.050	1.120	28.45	AK	AS
LHC 142H 02									2.188	55.56	100.00	1.783	1.200	30.48	AK	AS
LHC 142H 03									2.500	63.50	88.00	1.569	1.360	34.54	AK	AT
LHC 142H 04									2.750	69.85	78.00	1.391	1.500	38.10	AL	AU
LHC 142H 05									3.313	84.14	64.00	1.410	1.785	45.34	AL	AW
LHC 142H 06									4.000	101.60	53.00	0.945	2.140	54.36	AM	AX
LHC 142H 07									4.500	114.30	46.00	0.820	2.367	60.12	AM	AY
LHC 142H 08									5.000	127.00	42.00	0.749	2.640	67.06	AM	AZ
LHC 142J 0	1.095	27.81	1.125	28.58	.142	3.61	120.00	54.348	1.750	44.45	150.00	2.679	0.943	23.95	AK	AR
LHC 142J 01									2.000	50.80	129.00	2.300	1.060	26.92	AK	AR
LHC 142J 02									2.250	57.15	111.00	1.979	1.170	29.72	AK	AS
LHC 142J 03									2.500	63.50	98.00	1.747	1.285	32.64	AK	AT
LHC 142J 04									2.750	69.85	88.00	1.569	1.400	35.56	AK	AU
LHC 142J 05									3.000	76.20	80.00	1.426	1.510	38.35	AL	AW
LHC 142J 06									3.500	88.90	67.00	1.195	1.720	43.69	AL	AX
LHC 142J 07									4.000	101.60	59.00	1.052	1.950	49.53	AL	AY
LHC 142J 08									4.500	114.30	51.00	0.909	2.164	54.97	AM	AZ
LHC 142J 09									5.000	127.00	46.00	0.820	2.420	61.47	AM	AZA
LHC 148J 0	1.095	27.81	1.125	28.58	.148	3.76	135.00	61.236	1.750	44.45	175.00	3.125	1.000	25.40	AK	AS
LHC 148J 01									2.000	50.80	149.30	2.666	1.125	28.58	AK	AS
LHC 148J 02									2.250	57.15	130.20	2.325	1.240	31.50	AK	AT
LHC 148J 03									2.500	63.50	115.45	2.062	1.360	34.54	AL	AU
LHC 148J 04									2.750	69.85	103.69	1.852	1.475	37.46	AL	AW
LHC 148J 05									3.000	76.20	94.10	1.680	1.595	40.51	AM	AX
LHC 148J 06									3.500	88.90	79.42	1.418	1.830	46.48	AM	AY
LHC 148J 07									4.000	101.60	68.70	1.227	2.070	52.58	AM	AZ
LHC 148J 08									4.500	114.30	60.52	1.081	2.305	58.55	AN	AZA
LHC 148J 09									5.000	127.00	54.10	0.966	2.540	64.52	AN	AZB
LHC 148M 00	1.218	30.94	1.250	31.75	.148	3.76	120.48	54.650	0.875	22.23	352.00	6.286	0.549	13.94	AE	AM
LHC 148M 0A									1.000	25.40	289.50	5.170	0.601	15.27	AG	AN
LHC 148M 0B									1.250	31.75	213.50	3.813	0.707	17.95	AG	AN
LHC 148M 0C									1.500	38.10	169.50	3.027	0.811	20.60	AJ	AP
LHC 148M 0D									2.000	50.80	119.50	2.134	1.023	25.99	AJ	AP
LHC 148M 01									2.250	57.15	104.30	1.863	1.128	28.64	AK	AZ
LHC 148M 02									2.500	63.50	92.47	1.651	1.233	31.32	AL	AZ
LHC 148M 03									3.000	76.20	75.37	1.346	1.444	36.67	AL	AZ
LHC 148M 04									3.500	88.90	63.61	1.136	1.654	42.01	AM	AZA
LHC 148M 05									3.750	95.25	59.01	1.054	1.759	44.69	AM	AZA
LHC 148M 06									4.000	101.60	55.02	0.983	1.865	47.36	AM	AZA
LHC 148M 07									4.500	114.30	48.48	0.866	2.075	52.71	AO	AZC
LHC 148M 08									5.000	127.00	43.33	0.774	2.286	58.06	AO	AZD
LHC 148M 09									5.500	139.70	39.16	0.699	2.496	63.41	AP	AZD
LHC 148M 10									6.000	152.40	35.73	0.638	2.707	68.75	AP	AZE

COMPRESSION SPRINGS



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: HEAVY DUTY SERIES (INCH)

ENDS ARE GROUND • Music Wire/Oil Tempered MB (Shotpeened, Plated) or Stainless Steel (Shotpeened, Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	M	S
LHC 156M 01	1.218	30.94	1.250	31.75	.156	3.96	140.00	63.406	2.250	57.15	130.00	2.318	1.165	29.59	AK	AZ
LHC 156M 02									2.500	63.50	113.00	2.015	1.293	32.84	AL	AZ
LHC 156M 03									3.000	76.20	93.00	1.658	1.504	38.20	AL	AZB
LHC 156M 04									3.500	88.90	78.00	1.391	1.735	44.07	AM	AZC
LHC 156M 05									3.750	95.25	72.00	1.284	1.852	47.04	AM	AZD
LHC 156M 06									4.000	101.60	68.00	1.212	1.950	49.53	AM	AZE
LHC 156M 07									4.500	114.30	60.00	1.070	2.165	54.99	AO	AZE
LHC 156M 08									5.000	127.00	53.00	0.945	2.404	61.06	AO	AZE
LHC 156M 09									5.500	139.70	48.00	0.857	2.683	68.14	AP	AZE
LHC 156M 10									6.000	152.40	44.00	0.786	2.910	73.93	AR	AZF
LHC 162N 0A	1.218	30.94	1.250	31.75	.162	4.11	160.00	72.464	1.000	25.40	428.50	7.652	0.661	16.79	AL	AZB
LHC 162N 0B									1.500	38.10	246.50	4.402	0.903	22.93	AL	AZB
LHC 162N 0C									2.000	50.80	173.00	3.089	1.145	29.07	AL	AZB
LHC 162N 0									2.250	57.15	150.50	2.688	1.250	31.75	AL	AZB
LHC 162N 01									2.500	63.50	133.00	2.371	1.348	34.24	AL	AZB
LHC 162N 02									3.000	76.20	110.00	1.961	1.562	39.67	AL	AZC
LHC 162N 03									3.500	88.90	91.00	1.622	1.821	46.25	AM	AZC
LHC 162N 04									3.750	95.25	85.00	1.516	1.926	48.92	AN	AZE
LHC 162N 05									4.000	101.60	79.00	1.409	2.048	52.02	AN	AZE
LHC 162N 06									4.500	114.30	70.00	1.248	2.270	57.66	AO	AZE
LHC 162N 07									5.000	127.00	63.00	1.123	2.485	63.12	AO	AZF
LHC 162N 08									5.250	133.35	60.00	1.070	2.594	65.89	AP	AZG
LHC 162N 09									5.500	139.70	56.00	1.000	2.780	70.61	AR	AZH
LHC 162N 10									6.000	152.40	51.08	0.912	3.015	76.58	AS	AZJ
LHC 177N 01	1.218	30.94	1.250	31.75	.177	4.50	175.00	79.370	1.500	38.10	353.00	6.304	1.011	25.67	AL	AZA
LHC 177N 02									2.000	50.80	245.80	4.389	1.292	32.82	AL	AZA
LHC 177N 03									2.500	63.50	188.50	3.366	1.574	39.99	AL	AZC
LHC 177N 04									3.000	76.20	152.90	2.730	1.856	47.14	AM	AZD
LHC 177N 05									3.500	88.90	128.60	2.297	2.138	54.30	AN	AZE
LHC 177N 06									4.000	101.60	110.90	1.980	2.421	61.48	AO	AZE
LHC 177N 07									4.500	114.30	97.60	1.743	2.701	68.60	AO	AZF
LHC 177N 08									5.000	127.00	87.10	1.555	2.982	75.75	AP	AZG
LHC 192N 01	1.218	30.94	1.250	31.75	.192	4.88	216.00	97.960	1.500	38.10	516.10	9.216	1.089	27.65	AL	AZB
LHC 192N 02									2.000	50.80	356.40	6.365	1.399	35.54	AL	AZC
LHC 192N 03									2.500	63.50	272.20	4.861	1.710	43.42	AM	AZD
LHC 192N 04									3.000	76.20	220.20	3.932	2.020	51.31	AM	AZD
LHC 192N 05									3.500	88.90	184.80	3.300	2.331	59.21	AO	AZD
LHC 192N 06									4.000	101.60	159.30	2.845	2.641	67.08	AO	AZF
LHC 192N 07									4.500	114.30	139.90	2.498	2.952	74.99	AR	AZF
LHC 192N 08									5.000	127.00	124.80	2.229	3.262	82.85	AS	AZH

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: HEAVY DUTY SERIES (INCH)

ENDS ARE GROUND • Music Wire/Oil Tempered MB (Shotpeened, Plated) or Stainless Steel (Shotpeened, Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*
LHC 207N 01	1.218	30.94	1.250	31.75	.207	5.26	252.50	114.510	2.000	50.80	504.80	9.015	1.505	38.23	AO	AZG
LHC 207N 02									2.500	63.50	383.80	6.854	1.845	46.87	AO	AZH
LHC 207N 03									3.000	76.20	309.60	5.529	2.185	55.51	AR	AZJ
LHC 207N 04									3.500	88.90	259.40	4.632	2.526	64.15	AS	AZK
LHC 207N 05									4.000	101.60	223.20	3.986	2.866	72.80	AT	AZK
LHC 207N 06									4.500	114.30	195.90	3.498	3.206	81.44	AW	AZM
LHC 207N 07									5.000	127.00	174.60	3.118	3.545	90.05	AX	AZN
LHC 162P 0	1.400	35.56	1.437	36.50	.162	4.11	140.00	63.406	2.250	57.15	116.00	2.072	1.075	27.31	AL	AZB
LHC 162P 01									2.500	63.50	102.67	1.833	1.170	29.72	AL	AZB
LHC 162P 02									3.000	76.20	83.50	1.491	1.360	34.54	AL	AZC
LHC 162P 03									3.500	88.90	70.34	1.256	1.550	39.37	AM	AZD
LHC 162P 04									4.000	101.60	60.78	1.085	1.740	44.20	AM	AZE
LHC 162P 05									4.250	107.95	56.90	1.016	1.830	46.48	AO	AZE
LHC 162P 06									4.500	114.30	53.50	0.955	1.925	48.90	AO	AZE
LHC 162P 07									5.000	127.00	47.78	0.853	2.115	53.72	AP	AZF
LHC 162P 08									5.250	133.35	45.35	0.810	2.210	56.13	AP	AZG
LHC 177P 0	1.400	35.56	1.437	36.50	.177	4.50	180.00	81.522	2.250	57.15	168.82	3.015	1.185	30.10	AL	AZD
LHC 177P 01									2.500	63.50	149.00	2.657	1.295	32.89	AL	AZD
LHC 177P 02									3.000	76.20	120.00	2.140	1.508	38.30	AM	AZE
LHC 177P 03									3.500	88.90	100.00	1.783	1.720	43.69	AO	AZE
LHC 177P 04									4.000	101.60	87.00	1.551	1.930	49.02	AP	AZF
LHC 177P 05									4.250	107.95	81.00	1.444	2.039	51.79	AP	AZG
LHC 177P 06									4.500	114.30	76.00	1.355	2.151	54.64	AR	AZG
LHC 177P 07									5.000	127.00	69.00	1.230	2.360	59.94	AS	AZH
LHC 177P 08									5.250	133.35	65.00	1.159	2.480	62.99	AT	AZJ
LHC 148R 01	1.460	37.08	1.500	38.10	.148	3.76	91.68	41.590	1.500	38.10	113.70	2.030	0.714	18.14	AK	AS
LHC 148R 02									2.000	50.80	80.30	1.434	0.885	22.47	AK	AW
LHC 148R 03									2.500	63.50	62.10	1.109	1.055	26.79	AL	AW
LHC 148R 04									3.000	76.20	50.60	0.904	1.225	31.11	AL	AX
LHC 148R 05									3.500	88.90	42.70	0.763	1.395	35.44	AM	AY
LHC 148R 06									4.000	101.60	37.00	0.661	1.563	39.70	AM	AZA
LHC 162R 01	1.460	37.08	1.500	38.10	.162	4.11	115.00	52.150	1.500	38.10	162.40	2.900	0.799	20.29	AL	AZB
LHC 162R 02									2.000	50.80	114.00	2.036	0.996	25.31	AL	AZB
LHC 162R 03									2.500	63.50	87.80	1.568	1.194	30.33	AL	AZB
LHC 162R 04									3.000	76.20	71.40	1.275	1.392	35.35	AL	AZC
LHC 162R 05									3.500	88.90	60.10	1.073	1.591	40.40	AM	AZC
LHC 162R 06									4.000	101.60	52.00	0.929	1.786	45.38	AM	AZE
LHC 162R 07									4.500	114.30	45.70	0.816	1.987	50.46	AO	AZE
LHC 162R 08									5.000	127.00	40.80	0.729	2.185	55.51	AP	AZF

COMPRESSION SPRINGS



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: HEAVY DUTY SERIES (INCH)

ENDS ARE GROUND • Music Wire/Oil Tempered MB (Shotpeened, Plated) or Stainless Steel (Shotpeened, Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	M	S
LHC 187R 01	1.460	37.08	1.500	38.10	.187	4.75	200.00	90.580	2.500	63.50	168.00	2.996	1.337	33.96	AM	AZE
LHC 187R 02									3.000	76.20	138.00	2.461	1.546	39.27	AO	AZF
LHC 187R 03									3.500	88.90	116.00	2.068	1.769	44.93	AO	AZG
LHC 187R 04									4.000	101.60	99.00	1.765	2.008	51.00	AR	AZH
LHC 187R 05									4.250	107.95	92.00	1.640	2.131	54.13	AR	AZJ
LHC 187R 06									4.500	114.30	86.00	1.533	2.255	57.28	AS	AZK
LHC 187R 07									5.000	127.00	77.00	1.373	2.474	62.84	AU	AZK
LHC 187R 08									5.250	133.35	73.00	1.302	2.590	65.79	AU	AZK
LHC 207S 01	1.580	40.13	1.625	41.28	.207	5.26	230.00	104.167	2.500	63.50	210.00	3.744	1.420	36.07	AP	AZK
LHC 207S 02									3.000	76.20	170.00	3.031	1.656	42.06	AS	AZK
LHC 207S 03									3.500	88.90	142.00	2.532	1.900	48.26	AT	AZK
LHC 207S 04									4.000	101.60	121.00	2.158	2.159	54.84	AW	AZL
LHC 207S 05									4.500	114.30	107.00	1.908	2.386	60.60	AX	AZM
LHC 207S 06									5.000	127.00	95.00	1.694	2.635	66.93	AY	AZN
LHC 207S 07									5.500	139.70	86.00	1.533	2.806	71.27	AZ	AZO
LHC 207S 08									6.000	152.40	79.00	1.409	3.086	78.38	AZA	AZP
LHC 148T 01	1.687	42.85	1.750	44.45	.148	3.76	79.83	36.250	1.500	38.10	89.70	1.602	0.626	15.91	AK	AT
LHC 148T 02									2.000	50.80	63.40	1.132	0.760	19.30	AK	AX
LHC 148T 03									2.500	63.50	49.00	0.875	0.894	22.70	AL	AX
LHC 148T 04									3.000	76.20	39.90	0.713	1.028	26.11	AL	AY
LHC 148T 05									3.500	88.90	33.70	0.602	1.161	29.48	AM	AZ
LHC 148T 06									4.000	101.60	29.10	0.520	1.296	32.92	AM	AZA
LHC 148T 07									4.500	114.30	25.70	0.459	1.427	36.25	AN	AZA
LHC 148T 08									5.000	127.00	22.90	0.409	1.564	39.74	AO	AZB
LHC 162T 01	1.687	42.85	1.750	44.45	.162	4.11	102.66	46.570	1.500	38.10	125.80	2.247	0.704	17.88	AL	AZB
LHC 162T 02									2.000	50.80	88.20	1.575	0.862	21.89	AL	AZB
LHC 162T 03									2.500	63.50	68.00	1.214	1.019	25.88	AL	AZB
LHC 162T 04									3.000	76.20	55.30	0.988	1.176	29.87	AL	AZC
LHC 162T 05									3.500	88.90	46.60	0.832	1.333	33.87	AM	AZD
LHC 162T 06									4.000	101.60	40.20	0.718	1.492	37.91	AM	AZE
LHC 162T 07									4.500	114.30	35.40	0.632	1.650	41.90	AO	AZE
LHC 162T 08									5.000	127.00	31.60	0.564	1.808	45.92	AR	AZF
LHC 177T 01	1.687	42.85	1.750	44.45	.177	4.50	128.00	58.050	1.500	38.10	177.70	3.173	0.785	19.94	AM	AZD
LHC 177T 02									2.000	50.80	123.70	2.209	0.969	24.60	AM	AZD
LHC 177T 03									2.500	63.50	94.90	1.695	1.152	29.26	AM	AZD
LHC 177T 04									3.000	76.20	76.90	1.373	1.336	33.94	AM	AZE
LHC 177T 05									3.500	88.90	64.70	1.155	1.519	38.59	AN	AZF
LHC 177T 06									4.000	101.60	55.80	0.996	1.704	43.27	AN	AZG
LHC 177T 07									4.500	114.30	49.10	0.877	1.886	47.91	AP	AZG
LHC 177T 08									5.000	127.00	43.80	0.782	2.070	52.59	AR	AZH

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).


*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: HEAVY DUTY SERIES (INCH)

ENDS ARE GROUND • Music Wire/Oil Tempered MB (Shotpeened, Plated) or Stainless Steel (Shotpeened, Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*
LHC 192T 01	1.687	42.85	1.750	44.45	.192	4.88	159.00	72.110	1.500	38.10	247.40	4.418	0.863	21.92	AN	AZC
LHC 192T 02									2.000	50.80	170.90	3.052	1.072	27.23	AN	AZE
LHC 192T 03									2.500	63.50	130.50	2.330	1.281	32.55	AP	AZH
LHC 192T 04									3.000	76.20	105.60	1.886	1.490	37.86	AR	AZH
LHC 192T 05									3.500	88.90	88.60	1.582	1.700	43.19	AT	AZG
LHC 192T 06									4.000	101.60	76.40	1.364	1.909	48.48	AU	AZK
LHC 192T 07									4.500	114.30	67.10	1.198	2.119	53.81	AW	AZJ
LHC 192T 08									5.000	127.00	59.80	1.068	2.329	59.16	AX	AZM
LHC 218T 01	1.687	42.85	1.750	44.45	.218	5.54	250.00	113.230	2.500	63.50	228.00	4.065	1.415	25.94	AS	AZK
LHC 218T 02									3.000	76.20	181.00	3.227	1.668	42.37	AT	AZK
LHC 218T 03									3.500	88.90	152.00	2.710	1.903	48.34	AW	AZL
LHC 218T 04									4.000	101.60	130.00	2.318	2.152	54.66	AX	AZM
LHC 218T 05									4.500	114.30	114.00	2.033	2.387	60.63	AY	AZN
LHC 218T 06									5.000	127.00	102.00	1.819	2.625	66.68	AZ	AZO
LHC 218T 07									5.500	139.70	91.00	1.622	2.889	73.38	AZA	AZP
LHC 218T 08									6.000	152.40	84.00	1.498	3.093	78.56	AZB	AZP
LHC 234T 01	1.687	42.85	1.750	44.45	.234	5.94	300.67	136.380	2.500	63.50	309.76	5.532	1.529	38.85	AU	AZL
LHC 234T 02									3.000	76.20	248.59	4.439	1.791	45.48	AW	AZL
LHC 234T 03									3.500	88.90	207.60	3.707	2.052	52.11	AY	AZM
LHC 234T 04									4.000	101.60	178.21	3.182	2.313	58.75	AZ	AZN
LHC 234T 05									4.500	114.30	156.11	2.788	2.574	65.38	AZA	AZP
LHC 234T 06									5.000	127.00	138.89	2.480	2.835	72.01	AZB	AZQ
LHC 234T 07									5.500	139.70	125.09	2.234	3.096	78.65	AZC	AZR
LHC 234T 08									6.000	152.40	113.78	2.032	3.357	85.28	AZD	AZS
LHC 148U 01	1.937	49.20	2.000	50.80	.148	3.76	70.06	31.780	2.000	50.80	51.60	0.921	0.661	16.78	AN	AY
LHC 148U 02									2.500	63.50	39.90	0.713	0.765	19.43	AN	AZ
LHC 148U 03									3.000	76.20	32.50	0.580	0.870	22.09	AP	AZA
LHC 148U 04									3.500	88.90	27.40	0.489	0.975	24.77	AR	AZB
LHC 148U 05									4.000	101.60	23.70	0.423	1.080	27.42	AS	AZC
LHC 148U 06									4.500	114.30	20.90	0.373	1.183	30.06	AT	AZD
LHC 148U 07									5.000	127.00	18.70	0.334	1.287	32.69	AU	AZE
LHC 148U 08									5.500	139.70	16.90	0.302	1.391	35.34	AW	AZF
LHC 162U 01	1.937	49.20	2.000	50.80	.162	4.11	89.97	40.810	2.000	50.80	70.80	1.264	0.751	19.07	AR	AZC
LHC 162U 02									2.500	63.50	54.50	0.973	0.876	22.24	AU	AZD
LHC 162U 03									3.000	76.20	44.30	0.791	1.001	25.41	AW	AZE
LHC 162U 04									3.500	88.90	37.40	0.668	1.124	28.54	AX	AZF
LHC 162U 05									4.000	101.60	32.30	0.577	1.248	31.71	AY	AZG
LHC 162U 06									4.500	114.30	28.40	0.507	1.374	34.90	AY	AZG
LHC 162U 07									5.000	127.00	25.40	0.454	1.497	38.02	AZ	AZH
LHC 162U 08									5.500	139.70	22.90	0.409	1.624	41.24	AZA	AZJ

COMPRESSION SPRINGS



SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

COMPRESSION SPRINGS: HEAVY DUTY SERIES (INCH)

ENDS ARE GROUND • Music Wire/Oil Tempered MB (Shotpeened, Plated) or Stainless Steel (Shotpeened, Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		TO WORK IN HOLE DIAMETER		WIRE DIAMETER		APPROX. LOAD AT SOLID HGT.		FREE LENGTH		SPRING RATE		SOLID HEIGHT		PRICE GROUP	
	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	M	S
LHC 177U 01	1.937	49.20	2.000	50.80	.177	4.50	113.25	51.360	2.500	63.50	74.90	1.338	0.995	25.26	AS	AZD
LHC 177U 02									3.000	76.20	60.80	1.086	1.141	28.97	AU	AZE
LHC 177U 03									3.500	88.90	51.10	0.913	1.288	32.71	AW	AZF
LHC 177U 04									4.000	101.60	44.10	0.788	1.434	36.44	AY	AZG
LHC 177U 05									4.500	114.30	38.80	0.693	1.581	40.15	AZ	AZH
LHC 177U 06									5.000	127.00	34.60	0.618	1.728	43.90	AZA	AZJ
LHC 177U 07									5.500	139.70	31.20	0.557	1.877	47.67	AZB	AZK
LHC 177U 08									6.000	152.40	28.50	0.509	2.020	51.31	AZC	AZL
LHC 192U 01	1.937	49.20	2.000	50.80	.192	4.88	141.30	64.080	2.500	63.50	101.40	1.811	1.113	28.26	AW	AZG
LHC 192U 02									3.000	76.20	82.00	1.464	1.282	32.57	AW	AZH
LHC 192U 03									3.500	88.90	68.80	1.229	1.452	36.89	AX	AZJ
LHC 192U 04									4.000	101.60	59.30	1.059	1.622	41.19	AZ	AZK
LHC 192U 05									4.500	114.30	52.10	0.930	1.791	45.49	AZA	AZK
LHC 192U 06									5.000	127.00	46.50	0.830	1.959	49.76	AZB	AZM
LHC 192U 07									5.500	139.70	41.90	0.748	2.131	54.12	AZC	AZN
LHC 192U 08									6.000	152.40	38.20	0.682	2.299	58.39	AZD	AZO
LHC 207U 01	1.937	49.20	2.000	50.80	.207	5.26	200.00	90.720	2.500	63.50	146.50	2.615	1.134	28.82	AT	AZK
LHC 207U 02									3.000	76.20	118.10	2.110	1.307	33.20	AW	AZK
LHC 207U 03									3.500	88.90	99.00	1.768	1.480	37.59	AX	AZL
LHC 207U 04									4.000	101.60	85.20	1.521	1.653	41.97	AZ	AZM
LHC 207U 05									4.500	114.30	74.80	1.335	1.825	46.36	AZA	AZN
LHC 207U 06									5.000	127.00	66.60	1.190	1.998	50.75	AZB	AZO
LHC 207U 07									5.500	139.70	60.10	1.073	2.171	55.13	AZC	AZP
LHC 207U 08									6.000	152.40	54.70	0.977	2.343	59.52	AZD	AZP
LHC 250U 01	1.937	49.20	2.000	50.80	.250	6.35	300.58	136.340	2.500	63.50	296.48	5.295	1.486	37.75	AX	AZP
LHC 250U 02									3.000	76.20	237.19	4.236	1.733	44.01	AY	AZP
LHC 250U 03									3.500	88.90	197.66	3.530	1.979	50.27	AZA	AZQ
LHC 250U 04									4.000	101.60	169.42	3.026	2.226	56.54	AZB	AZQ
LHC 250U 05									4.500	114.30	148.24	2.647	2.472	62.80	AZC	AZQ
LHC 250U 06									5.000	127.00	131.77	2.353	2.719	69.06	AZD	AZR
LHC 250U 07									5.500	139.70	118.59	2.118	2.965	75.32	AZE	AZS
LHC 250U 08									6.000	152.40	107.81	1.925	3.212	81.59	AZF	AZS

SPECIAL INSTRUCTIONS FOR COMPRESSION SERIES


STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.


REDUX™ Wave Springs can be used in place of conventional round wire springs in space critical environments. Generally, they occupy thirty to fifty percent of the compressed height space of comparable round wire springs offering equal deflection with the same load specifications.

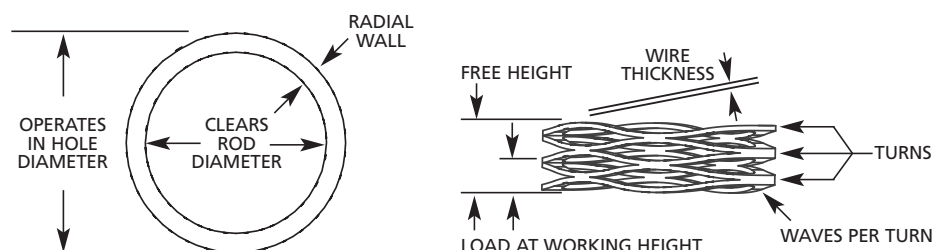


**NEW
SMALLER
SIZES
IN STOCK**

Specifications:

Material: Stainless Steel Type 17-7 PH
Wire: Single strand of pre-tempered flat wire
Maximum Temperature: 650 degrees F (340° C)
Finish: Passivated
Coils: Continuous Coil
Design: Uniform diameter and wave heights

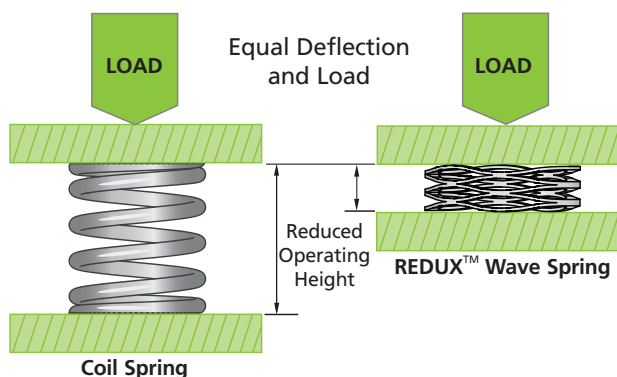

LEE STOCK NUMBER	HOLE DIAMETER		ROD DIAMETER		NOMINAL LOAD		WORKING HEIGHT		FREE HEIGHT		WIRE THICKNESS X RADIAL WALL	TURNS	WAVES PER TURN	SPRING RATE		PRICE GROUP
	IN.	MM	IN.	MM	LB.	KG	IN.	MM	IN.	MM				LB/IN.	KG/MM	
LW 025 02 0075S	.250	6.35	.150	3.81	2	.91	.033	.84	.075	1.91	.006 x .024	.15 x .61	2.5	48	.86	P1
LW 025 02 0100S							.050	1.27	.100	2.54				40	.72	P1
LW 025 02 0125S							.060	1.52	.125	3.18				31	.55	P1
LW 025 02 0150S							.075	1.91	.150	3.81				27	.48	P2
LW 025 02 0175S							.085	2.16	.175	4.45				22	.39	P3
LW 025 02 0200S							.095	2.41	.200	5.08				19	.34	P4
LW 025 02 0225S							.120	3.05	.225	5.72				19	.34	P4
LW 025 02 0275S							.140	3.56	.275	6.99				15	.27	P5
LW 025 02 0325S							.170	4.32	.325	8.26				13	.23	P7
LW 025 05 0075S	.250	6.35	.150	3.81	5	.22	.037	.94	.075	1.91	.008 x .024	.20 x .61	2.5	132	2.36	P1
LW 025 05 0100S							.048	1.22	.100	2.54				96	1.72	P1
LW 025 05 0125S							.065	1.65	.125	3.18				83	1.49	P1
LW 025 05 0150S							.075	1.91	.150	3.81				67	1.20	P2
LW 025 05 0175S							.090	2.29	.175	4.45				59	1.06	P3
LW 025 05 0200S							.100	2.54	.200	5.08				50	.90	P4
LW 025 05 0225S							.120	3.05	.225	5.72				48	.86	P5
LW 025 05 0275S							.148	3.76	.275	6.99				39	.70	P7
LW 025 05 0325S							.175	4.45	.325	8.26				33	.59	P9



SPECIAL INSTRUCTIONS FOR REDUX WAVE SERIES


PRICING: See Page 142 for 10-199 pricing; to price or order up to 599 pieces, visit www.leespring.com; 600+ pieces, contact Lee Spring.
CUSTOM DESIGNS: Custom Wave Spring designs are available on request; see Custom Springs Section for Wave Spring RFQ form.

LEE STOCK NUMBER	HOLE DIAMETER		ROD DIAMETER		NOMINAL LOAD		WORKING HEIGHT		FREE HEIGHT		WIRE THICKNESS X RADIAL WALL		TURNS	WAVES PER TURN	SPRING RATE		PRICE GROUP
	IN.	MM	IN.	MM	LB.	KG	IN.	MM	IN.	MM	IN.	MM	#	#	LB/IN.	KG/MM	
LW 031 03 0114S	.312	7.92	.200	5.08	3	1.36	.070	1.78	.114	2.90	.008 x .032	.20 x .81	3	2.5	68	1.22	P1
LW 031 03 0152S							.096	2.44	.152	3.86			4		54	.97	P1
LW 031 03 0190S							.118	3.00	.190	4.83			5		42	.75	P1
LW 031 03 0228S							.145	3.68	.228	5.79			6		36	.64	P2
LW 031 03 0266S							.165	4.19	.266	6.76			7		30	.54	P2
LW 031 03 0304S							.195	4.95	.304	7.72			8		28	.50	P3
LW 031 03 0342S							.215	5.46	.342	8.69			9		24	.43	P4
LW 031 03 0418S							.262	6.65	.418	10.62			11		19	.34	P8
LW 031 03 0494S							.309	7.85	.494	12.55			13		16	.29	P8
LW 031 06 0114S	.312	7.92	.200	5.08	6	2.72	.072	1.83	.114	2.90	.010 x .032	.25 x .81	3	2.5	143	2.56	P1
LW 031 06 0152S							.096	2.44	.152	3.86			4		107	1.92	P1
LW 031 06 0190S							.123	3.12	.190	4.83			5		90	1.61	P2
LW 031 06 0228S							.144	3.66	.228	5.79			6		71	1.27	P3
LW 031 06 0266S							.176	4.47	.266	6.76			7		67	1.20	P4
LW 031 06 0304S							.197	5.00	.304	7.72			8		56	1.00	P4
LW 031 06 0342S							.227	5.77	.342	8.69			9		52	.93	P7
LW 031 06 0418S							.278	7.06	.418	10.62			11		43	.77	P7
LW 031 06 0494S							.336	8.53	.494	12.55			13		38	.68	P9
LW 038 04 0150S	.375	9.53	.250	6.35	4	1.81	.062	1.57	.150	3.81	.008 x .032	.20 x .81	3	2.5	45	.81	P1
LW 038 04 0200S							.098	2.49	.200	5.08			4		39	.70	P1
LW 038 04 0250S							.108	2.74	.250	6.35			5		28	.50	P1
LW 038 04 0350S							.150	3.81	.350	8.89			7		20	.36	P3
LW 038 04 0400S							.184	4.67	.400	10.16			8		19	.34	P5
LW 038 04 0450S							.195	4.95	.450	11.43			9		16	.29	P6
LW 038 04 0550S							.240	6.10	.550	13.97			11		13	.23	P7
LW 038 07 0150S	.375	9.53	.250	6.35	7	3.18	.081	2.06	.150	3.81	.011 x .032	.28 x .81	3	2.5	101	1.81	P1
LW 038 07 0200S							.119	3.02	.200	5.08			4		86	1.54	P2
LW 038 07 0250S							.145	3.68	.250	6.35			5		67	1.20	P3
LW 038 07 0350S							.202	5.13	.350	8.89			7		47	.84	P4
LW 038 07 0400S							.240	6.10	.400	10.16			8		44	.79	P4
LW 038 07 0450S							.262	6.65	.450	11.43			9		37	.66	P7
LW 038 07 0550S							.327	8.31	.550	13.97			11		31	.55	P7
LW 044 04 0165S	.437	11.10	.281	7.14	4	1.81	.063	1.60	.165	4.19	.008 x .040	.20 x 1.02	3	2.5	39	.70	P1
LW 044 04 0220S							.093	2.36	.220	5.59			4		31	.55	P2
LW 044 04 0275S							.109	2.77	.275	6.99			5		24	.43	P3
LW 044 04 0385S							.160	4.06	.385	9.78			7		18	.32	P4
LW 044 04 0440S							.195	4.95	.440	11.18			8		16	.29	P4
LW 044 04 0550S							.240	6.10	.550	13.97			10		13	.23	P6
LW 044 08 0165S	.437	11.10	.281	7.14	8	3.63	.082	2.08	.165	4.19	.011 x .046	.28 x 1.17	3	2.5	96	1.72	P1
LW 044 08 0220S							.115	2.92	.220	5.59			4		76	1.36	P2
LW 044 08 0275S							.142	3.61	.275	6.99			5		60	1.07	P4
LW 044 08 0385S							.198	5.03	.385	9.78			7		43	.77	P5
LW 044 08 0440S							.231	5.87	.440	11.18			8		38	.68	P5
LW 044 08 0550S							.290	7.37	.550	13.97			10		31	.55	P7
LW 044 08 0605S							.319	8.10	.605	15.37			11		28	.50	P10

SPECIAL INSTRUCTIONS FOR REDUX WAVE SERIES

PRICING: See Page 142 for 10-199 pricing; to price or order up to 599 pieces, visit www.leespring.com; 600+ pieces, contact Lee Spring.
CUSTOM DESIGNS: Custom Wave Spring designs are available on request; see Custom Springs Section for Wave Spring RFQ form.

LEE STOCK NUMBER	HOLE DIAMETER		ROD DIAMETER		NOMINAL LOAD		WORKING HEIGHT		FREE HEIGHT		WIRE THICKNESS X RADIAL WALL		TURNS	WAVES PER TURN	SPRING RATE		PRICE GROUP
	IN.	MM	IN.	MM	LB.	KG	IN.	MM	IN.	MM	IN.	MM	#	#	LB/IN.	KG/MM	
LW 050 05 0180S	.500	12.70	.312	7.92	5	2.27	.062	1.57	.180	4.57	.008	.20	3	2.5	42	.75	P1
LW 050 05 0240S							.090	2.29	.240	6.10			4		33	.59	P2
LW 050 05 0300S							.107	2.72	.300	7.62			5		26	.47	P4
LW 050 05 0420S							.150	3.81	.420	10.67			7		19	.34	P5
LW 050 05 0480S							.180	4.57	.480	12.19			8		17	.30	P7
LW 050 05 0600S							.220	5.59	.600	15.24			10		13	.23	P11
LW 050 05 0660S							.240	6.10	.660	16.76			11		12	.21	P11
LW 050 10 0180S	.500	12.70	.312	7.92	10	4.54	.065	1.65	.180	4.57	.010	.25	3	2.5	87	1.56	P2
LW 050 10 0240S							.092	2.34	.240	6.10			4		68	1.22	P4
LW 050 10 0300S							.114	2.90	.300	7.62			5		54	.97	P5
LW 050 10 0420S							.162	4.11	.420	10.67			7		39	.70	P7
LW 050 10 0480S							.196	4.98	.480	12.19			8		35	.63	P9
LW 050 10 0600S							.246	6.25	.600	15.24			10		28	.50	P13
LW 050 10 0660S							.264	6.71	.660	16.76			11		25	.45	P14
LW 050 15 0180S	.500	12.70	.312	7.92	15	6.80	.075	1.91	.180	4.57	.012	.30	3	2.5	143	2.56	P3
LW 050 15 0240S							.110	2.79	.240	6.10			4		115	2.06	P5
LW 050 15 0300S							.136	3.45	.300	7.62			5		91	1.63	P6
LW 050 15 0360S							.167	4.24	.360	9.14			6		78	1.40	P7
LW 050 15 0420S							.182	4.62	.420	10.67			7		63	1.13	P8
LW 050 15 0480S							.216	5.49	.480	12.19			8		57	1.02	P10
LW 050 15 0540S	.562	14.27	.375	9.53	5	2.27	.240	6.10	.540	13.72	.060	1.52	9	2.5	50	.90	P10
LW 050 15 0600S							.280	7.11	.600	15.24			10		47	.84	P15
LW 050 15 0660S							.312	7.92	.660	16.76			11		43	.77	P16
LW 056 05 0195S							.080	2.03	.195	4.95	.009	.23	3	2.5	43	.77	P3
LW 056 05 0260S							.125	3.18	.260	6.60			4		37	.66	P3
LW 056 05 0325S							.135	3.43	.325	8.26			5		26	.47	P3
LW 056 05 0455S							.190	4.83	.455	11.56			7		19	.34	P8
LW 056 05 0520S							.230	5.84	.520	13.21			8		17	.30	P9
LW 056 05 0650S							.285	7.24	.650	16.51			10		14	.25	P14
LW 056 05 0715S							.315	8.00	.715	18.16			11		13	.23	P14
LW 056 11 0195S	.562	14.27	.375	9.53	11	4.99	.086	2.18	.195	4.95	.012	.30	3	2.5	101	1.81	P3
LW 056 11 0260S							.123	3.12	.260	6.60			4		80	1.43	P3
LW 056 11 0325S							.145	3.68	.325	8.26			5		61	1.09	P3
LW 056 11 0455S							.209	5.31	.455	11.56			7		45	.81	P8
LW 056 11 0520S							.253	6.43	.520	13.21			8		41	.73	P9
LW 056 11 0650S							.318	8.08	.650	16.51			10		33	.59	P14
LW 056 11 0715S							.343	8.71	.715	18.16			11		30	.54	P14
LW 056 18 0195S	.562	14.27	.375	9.53	18	8.16	.093	2.36	.195	4.95	.015	.38	3	2.5	176	3.15	P4
LW 056 18 0260S							.136	3.45	.260	6.60			4		145	2.60	P5
LW 056 18 0325S							.165	4.19	.325	8.26			5		113	2.02	P8
LW 056 18 0390S							.212	5.38	.390	9.91			6		101	1.81	P8
LW 056 18 0455S							.245	6.22	.455	11.56			7		86	1.54	P10
LW 056 18 0520S							.282	7.16	.520	13.21			8		76	1.36	P11
LW 056 18 0585S	.562	14.27	.375	9.53	18	8.16	.323	8.20	.585	14.86	.060	1.52	9	2.5	69	1.24	P11
LW 056 18 0650S							.360	9.14	.650	16.51			10		62	1.11	P18
LW 056 18 0715S							.408	10.36	.715	18.16			11		59	1.06	P19


SPECIAL INSTRUCTIONS FOR REDUX WAVE SERIES


PRICING: See Page 142 for 10-199 pricing; to price or order up to 599 pieces, visit www.leespring.com; 600+ pieces, contact Lee Spring.
CUSTOM DESIGNS: Custom Wave Spring designs are available on request; see Custom Springs Section for Wave Spring RFQ form.

LEE STOCK NUMBER	HOLE DIAMETER		ROD DIAMETER		NOMINAL LOAD		WORKING HEIGHT		FREE HEIGHT		WIRE THICKNESS X RADIAL WALL		TURNS	WAVES PER TURN	SPRING RATE		PRICE GROUP
	IN.	MM	IN.	MM	LB.	KG	IN.	MM	IN.	MM	IN.	MM	#	#	LB/IN.	KG/MM	
LW 063 06 0180S	.625	15.88	.450	11.43	6	2.72	.055	1.40	.180	4.57	.010 x .058	.25 x 1.47	3	2.5	48	.86	P6
LW 063 06 0240S							.068	1.73	.240	6.10			4		35	.63	P7
LW 063 06 0300S							.085	2.16	.300	7.62			5		28	.50	P9
LW 063 06 0420S							.128	3.25	.420	10.67			7		21	.38	P11
LW 063 06 0540S							.165	4.19	.540	13.72			9		16	.29	P11
LW 063 06 0660S							.202	5.13	.660	16.76			11		13	.23	P14
LW 063 12 0180S	.625	15.88	.450	11.43	12	5.44	.104	2.64	.180	4.57	.010 x .058	.25 x 1.47	3	3.5	158	2.83	P7
LW 063 12 0240S							.130	3.30	.240	6.10			4		109	1.95	P8
LW 063 12 0360S							.206	5.23	.360	9.14			6		78	1.40	P10
LW 063 12 0540S							.317	8.05	.540	13.72			9		54	.97	P13
LW 063 12 0660S							.386	9.80	.660	16.76			11		44	.79	P14
LW 063 12 0780S							.454	11.53	.780	19.81			13		37	.66	P16
LW 063 20 0180S	.625	15.88	.450	11.43	20	9.07	.102	2.59	.180	4.57	.012 x .060	.30 x 1.52	3	3.5	256	4.58	P8
LW 063 20 0240S							.135	3.43	.240	6.10			4		190	3.40	P9
LW 063 20 0300S							.175	4.45	.300	7.62			5		160	2.86	P12
LW 063 20 0360S							.205	5.21	.360	9.14			6		129	2.31	P12
LW 063 20 0420S							.245	6.22	.420	10.67			7		114	2.04	P13
LW 063 20 0540S							.315	8.00	.540	13.72			9		89	1.59	P15
LW 063 20 0660S							.390	9.91	.660	16.76			11		74	1.32	P18
LW 063 20 0780S							.465	11.81	.780	19.81			13		63	1.13	P20
LW 075 07 0250S	.750	19.05	.550	13.97	7	3.18	.142	3.61	.250	6.35	.008 x .071	.20 x 1.8	3	3.5	65	1.16	P5
LW 075 07 0333S							.187	4.75	.333	8.46			4		48	.86	P6
LW 075 07 0417S							.246	6.25	.417	10.59			5		41	.73	P6
LW 075 07 0583S							.348	8.84	.583	14.81			7		30	.54	P7
LW 075 07 0750S							.446	11.33	.750	19.05			9		23	.41	P14
LW 075 07 1000S							.580	14.73	1.000	25.40			12		17	.30	P17
LW 075 13 0250S	.750	19.05	.550	13.97	13	5.90	.159	4.04	.250	6.35	.010 x .078	.25 x 1.98	3	3.5	143	2.56	P7
LW 075 13 0333S							.203	5.16	.333	8.46			4		100	1.79	P7
LW 075 13 0417S							.270	6.86	.417	10.59			5		88	1.58	P10
LW 075 13 0500S							.314	7.98	.500	12.70			6		70	1.25	P13
LW 075 13 0750S							.489	12.42	.750	19.05			9		50	.90	P17
LW 075 13 1000S							.649	16.48	1.000	25.40			12		37	.66	P19
LW 075 22 0250S	.750	19.05	.550	13.97	22	9.98	.169	4.29	.250	6.35	.013 x .079	.33 x 2.01	3	3.5	272	4.87	P8
LW 075 22 0333S							.215	5.46	.333	8.46			4		186	3.33	P10
LW 075 22 0417S							.291	7.39	.417	10.59			5		175	3.13	P12
LW 075 22 0583S							.405	10.29	.583	14.81			7		124	2.22	P17
LW 075 22 0750S							.526	13.36	.750	19.05			9		98	1.75	P19
LW 075 22 1000S							.699	17.75	1.000	25.40			12		73	1.31	P20
LW 088 12 0250S	.875	22.23	.600	15.24	12	5.44	.117	2.97	.250	6.35	.010 x .086	.25 x 2.18	3	3.5	90	1.61	P6
LW 088 12 0333S							.158	4.01	.333	8.46			4		69	1.24	P10
LW 088 12 0417S							.207	5.26	.417	10.59			5		57	1.02	P10
LW 088 12 0583S							.287	7.29	.583	14.81			7		41	.73	P11
LW 088 12 0750S							.378	9.60	.750	19.05			9		32	.57	P18
LW 088 12 1000S							.498	12.65	1.000	25.40			12		24	.43	P18

SPECIAL INSTRUCTIONS FOR REDUX WAVE SERIES

PRICING: See Page 142 for 10-199 pricing; to price or order up to 599 pieces, visit www.leespring.com; 600+ pieces, contact Lee Spring.
CUSTOM DESIGNS: Custom Wave Spring designs are available on request; see Custom Springs Section for Wave Spring RFQ form.

LEE STOCK NUMBER	HOLE DIAMETER		ROD DIAMETER		NOMINAL LOAD		WORKING HEIGHT		FREE HEIGHT		WIRE THICKNESS X RADIAL WALL		TURNS	WAVES PER TURN	SPRING RATE		PRICE GROUP
	IN.	MM	IN.	MM	LB.	KG	IN.	MM	IN.	MM	IN.	MM	#	#	LB/IN.	KG/MM	
LW 088 18 0250S	.875	22.23	.600	15.24	18	8.16	.124	3.15	.250	6.35	.012	.20	3	3.5	148	2.65	P7
LW 088 18 0417S							.214	5.44	.417	10.59			5		89	1.59	P10
LW 088 18 0500S							.252	6.40	.500	12.70			6		76	1.36	P10
LW 088 18 0750S							.385	9.78	.750	19.05			9		50	.90	P10
LW 088 18 1000S							.509	12.93	1.000	25.40			12		38	.68	P13
LW 088 25 0250S	.875	22.23	.600	15.24	25	11.34	.166	4.22	.250	6.35	.015	.68	3	3.5	298	5.33	P8
LW 088 25 0333S							.214	5.44	.333	8.46			4		210	3.76	P12
LW 088 25 0417S							.278	7.06	.417	10.59			5		180	3.22	P12
LW 088 25 0583S							.395	10.03	.583	14.81			7		133	2.38	P14
LW 088 25 0750S							.510	12.95	.750	19.05			9		104	1.86	P18
LW 088 25 1000S							.670	17.02	1.000	25.40			12		78	1.40	P18
LW 100 12 0250S	1.000	25.40	.730	18.54	12	5.44	.084	2.13	.250	6.35	.010	.25	3	3.5	72	1.29	P6
LW 100 12 0417S							.145	3.68	.417	10.59			5		44	.79	P9
LW 100 12 0583S							.201	5.11	.583	14.81			7		31	.55	P12
LW 100 12 0750S							.258	6.55	.750	19.05			9		24	.43	P12
LW 100 12 1250S							.445	11.30	1.250	31.75			15		15	.27	P20
LW 100 12 1750S							.633	16.08	1.750	44.45			21		11	.20	P22
LW 100 18 0250S	1.000	25.40	.730	18.54	18	8.16	.087	2.21	.250	6.35	.012	.30	3	3.5	110	1.97	P7
LW 100 18 0417S							.148	3.76	.417	10.59			5		67	1.20	P10
LW 100 18 0583S							.212	5.38	.583	14.81			7		49	.88	P12
LW 100 18 1000S							.360	9.14	1.000	25.40			12		28	.50	P19
LW 100 18 1500S							.549	13.94	1.500	38.10			18		19	.34	P21
LW 100 18 2000S							.720	18.29	2.000	50.80			24		14	.25	P24
LW 100 25 0250S	1.000	25.40	.730	18.54	25	11.34	.131	3.33	.250	6.35	.015	.38	3	3.5	210	3.76	P8
LW 100 25 0417S							.227	5.77	.417	10.59			5		132	2.36	P12
LW 100 25 0500S							.266	6.76	.500	12.70			6		107	1.92	P13
LW 100 25 0583S							.319	8.10	.583	14.81			7		95	1.70	P15
LW 100 25 1000S							.541	13.74	1.000	25.40			12		54	.97	P21
LW 100 25 1500S							.813	20.65	1.500	38.10			18		36	.64	P22
LW 100 25 2000S							1.083	27.51	2.000	50.80			24		27	.48	P23
LW 112 12 0300S	1.125	25.58	.850	21.59	12	5.44	.146	3.71	.300	7.62	.012	.30	3	3.5	78	1.40	P6
LW 112 12 0500S							.250	6.35	.500	12.70			5		48	.86	P10
LW 112 12 0700S							.344	8.74	.700	17.78			7		34	.61	P11
LW 112 12 1000S							.488	12.40	1.000	25.40			10		23	.41	P16
LW 112 12 1600S							.807	20.50	1.600	40.64			16		15	.27	P20
LW 112 12 2000S							1.017	25.83	2.000	50.80			20		12	.21	P22
LW 112 20 0400S	1.125	28.58	.850	21.59	20	9.07	.202	5.13	.400	10.16	.015	.38	4	3.5	101	1.81	P9
LW 112 20 0500S							.270	6.86	.500	12.70			5		87	1.56	P10
LW 112 20 0700S							.381	9.68	.700	17.78			7		63	1.13	P13
LW 112 20 0800S							.427	10.85	.800	20.32			8		54	.97	P13
LW 112 20 1000S							.536	13.61	1.000	25.40			10		43	.77	P18
LW 112 20 1300S							.708	17.98	1.300	33.02			13		34	.61	P21
LW 112 20 2000S							1.088	27.64	2.000	50.80			20		22	.39	P23


SPECIAL INSTRUCTIONS FOR REDUX WAVE SERIES


PRICING: See Page 142 for 10-199 pricing; to price or order up to 599 pieces, visit www.leespring.com; 600+ pieces, contact Lee Spring.
CUSTOM DESIGNS: Custom Wave Spring designs are available on request; see Custom Springs Section for Wave Spring RFQ form.

LEE STOCK NUMBER	HOLE DIAMETER		ROD DIAMETER		NOMINAL LOAD		WORKING HEIGHT		FREE HEIGHT		WIRE THICKNESS X RADIAL WALL		TURNS	WAVES PER TURN	SPRING RATE		PRICE GROUP
	IN.	MM	IN.	MM	LB.	KG	IN.	MM	IN.	MM	IN.	MM	#	#	LB/IN.	KG/MM	
LW 112 30 0400S	1.125	28.58	.850	21.59	30	13.61	.229	5.82	.400	10.16	.018	.46	4	3.5	175	3.13	P12
LW 112 30 0600S							.350	8.89	.600	15.24			6		120	2.15	P17
LW 112 30 0800S							.470	11.94	.800	20.32			8		91	1.63	P20
LW 112 30 1300S							.787	19.99	1.300	33.02			13		58	1.04	P22
LW 112 30 2000S							1.202	30.53	2.000	50.80			20		38	.68	P23
LW 125 12 0300S	1.250	31.75	1.000	25.40	12	5.44	.084	2.13	.300	7.62	.012	.30	3	3.5	56	1.00	P9
LW 125 12 0500S							.149	3.78	.500	12.70			5		34	.61	P9
LW 125 12 0700S							.207	5.26	.700	17.78			7		24	.43	P15
LW 125 12 1000S							.301	7.65	1.000	25.40			10		17	.30	P16
LW 125 12 1300S							.395	10.03	1.300	33.02			13		13	.23	P16
LW 125 12 1600S	1.250	31.75	1.000	25.40	12	5.44	.467	11.86	1.600	40.64	.094	2.39	16		11	.20	P17
LW 125 12 2000S							.591	15.01	2.000	50.80			20		9	.16	P19
LW 125 20 0300S	1.250	31.75	1.000	25.40	20	9.07	.124	3.15	.300	7.62	.015	.38	3	3.5	114	2.04	P10
LW 125 20 0400S							.165	4.19	.400	10.16			4		85	1.52	P10
LW 125 20 0600S							.253	6.43	.600	15.24			6		58	1.04	P14
LW 125 20 0700S							.303	7.70	.700	17.78			7		50	.90	P16
LW 125 20 0800S							.341	8.66	.800	20.32			8		44	.79	P16
LW 125 20 1300S	1.250	31.75	1.000	25.40	20	9.07	.577	14.66	1.300	33.02	.094	3.29	13		28	.50	P17
LW 125 20 1600S							.692	17.58	1.600	40.64			16		22	.39	P21
LW 125 20 2000S							.866	22.00	2.000	50.80			20		18	.32	P24
LW 125 30 0300S	1.250	31.75	1.000	25.40	30	13.61	.158	4.01	.300	7.62	.019	.48	3	3.5	210	3.76	P10
LW 125 30 0500S							.272	6.91	.500	12.70			5		132	2.36	P10
LW 125 30 0600S							.320	8.13	.600	15.24			6		107	1.92	P15
LW 125 30 0800S							.433	11.00	.800	20.32			8		82	1.47	P17
LW 125 30 1000S							.538	13.67	1.000	25.40			10		65	1.16	P20
LW 125 30 1300S	1.250	31.75	1.000	25.40	30	13.61	.717	18.21	1.300	33.02	.094	2.39	13		51	.91	P22
LW 125 30 2000S							1.103	28.02	2.000	50.80			20		33	.59	P24
LW 138 15 0300S	1.375	34.93	1.030	26.16	15	6.90	.075	1.91	.300	7.62	.012	.30	3	3.5	67	1.20	P10
LW 138 15 0500S							.129	3.28	.500	12.70			5		40	.72	P10
LW 138 15 0700S							.179	4.55	.700	17.78			7		29	.52	P14
LW 138 15 1000S							.256	6.50	1.000	25.40			10		20	.36	P20
LW 138 15 1600S							.424	10.77	1.600	40.64			16		13	.23	P22
LW 138 25 0300S	1.375	34.93	1.030	26.16	25	11.34	.142	3.61	.300	7.62	.016	.41	3	3.5	158	2.83	P10
LW 138 25 0500S							.240	6.10	.500	12.70			5		96	1.72	P11
LW 138 25 0700S							.340	8.64	.700	17.78			7		69	1.24	P15
LW 138 25 1000S							.486	12.34	1.000	25.40			10		49	.88	P20
LW 138 25 1600S							.788	20.02	1.600	40.64			16		31	.55	P22
LW 138 35 0300S	1.375	34.93	1.030	26.16	35	15.88	.149	3.78	.300	7.62	.018	.46	3	3.5	232	4.15	P11
LW 138 35 0500S							.247	6.27	.500	12.70			5		138	2.47	P12
LW 138 35 0700S							.343	8.71	.700	17.78			7		98	1.75	P14
LW 138 35 1000S							.490	12.45	1.000	25.40			10		69	1.24	P20
LW 138 35 1600S							.793	20.14	1.600	40.64			16		43	.77	P22
LW 150 20 0300S	1.500	38.10	1.140	28.96	20	9.07	.129	3.28	.300	7.62	.016	.41	3	3.5	117	2.09	P10
LW 150 20 0500S							.213	5.41	.500	12.70			5		70	1.25	P13
LW 150 20 0700S							.301	7.65	.700	17.78			7		50	.90	P14
LW 150 20 1000S							.430	10.92	1.000	25.40			10		35	.63	P18
LW 150 20 1600S							.694	17.63	1.600	40.364			16		22	.39	P23

SPECIAL INSTRUCTIONS FOR REDUX WAVE SERIES

PRICING: See Page 142 for 10-199 pricing; to price or order up to 599 pieces, visit www.leespring.com; 600+ pieces, contact Lee Spring.
CUSTOM DESIGNS: Custom Wave Spring designs are available on request; see Custom Springs Section for Wave Spring RFQ form.

LEE STOCK NUMBER	HOLE DIAMETER		ROD DIAMETER		NOMINAL LOAD		WORKING HEIGHT		FREE HEIGHT		WIRE THICKNESS X RADIAL WALL		TURNS	WAVES PER TURN	SPRING RATE		PRICE GROUP
	IN.	MM	IN.	MM	LB.	KG	IN.	MM	IN.	MM	IN.	MM	#	#	LB/IN.	KG/MM	
LW 150 35 0300S	1.500	38.10	1.140	28.96	35	15.88	.122	3.10	.300	7.62	.018	.46	3	3.5	197	3.53	P10
LW 150 35 0500S							.206	5.23	.500	12.70			5		119	2.13	P13
LW 150 35 0700S							.291	7.39	.700	17.78			7		86	1.54	P14
LW 150 35 1000S							.409	10.39	1.000	25.40			10		59	1.06	P18
LW 150 35 1600S							.657	16.69	1.600	40.64			16		37	.66	P23
LW 150 60 0300S	1.500	38.10	1.140	28.96	60	27.22	.166	4.22	.300	7.62	.018	.46	3	4.5	448	8.02	P14
LW 150 60 0500S							.278	7.06	.500	12.70			5		270	4.83	P14
LW 150 60 0700S							.390	9.91	.700	17.78			7		194	3.47	P14
LW 150 60 1000S							.555	14.10	1.000	25.40			10		135	2.42	P18
LW 150 60 1600S							.890	22.61	1.600	40.64			16		85	1.52	P23
LW 175 25 0375S	1.750	44.45	1.340	34.04	25	11.34	.155	3.94	.375	9.53	.018	.46	3	3.5	114	2.04	P10
LW 175 25 0625S							.265	6.73	.625	15.88			5		69	1.24	P14
LW 175 25 0870S							.367	9.32	.870	22.10			7		50	.90	P14
LW 175 25 1250S							.523	13.28	1.250	31.75			10		34	.61	P18
LW 175 25 1750S							.737	18.72	1.750	44.45			14		25	.45	P23
LW 175 50 0375S	1.750	44.45	1.340	34.04	50	22.68	.188	4.78	.375	9.53	.018	.46	3	4.5	267	4.78	P10
LW 175 50 0625S							.315	8.00	.625	15.88			5		161	2.88	P14
LW 175 50 0870S							.452	11.48	.870	22.10			7		120	2.15	P14
LW 175 50 1250S							.629	15.98	1.250	31.75			10		81	1.45	P18
LW 175 50 1750S							.899	22.83	1.750	44.45			14		59	1.06	P23
LW 175 90 0375S	1.750	44.45	1.340	34.04	90	40.82	.232	5.89	.375	9.53	.024	.61	3	4.5	629	11.26	P10
LW 175 90 0625S							.409	10.39	.625	15.88			5		417	7.46	P14
LW 175 90 0870S							.577	14.66	.870	22.10			7		307	5.50	P17
LW 175 90 1250S							.813	20.65	1.250	31.75			10		206	3.69	P20
LW 175 90 1750S							.114	29.13	1.750	44.45			14		149	2.67	P23


SPECIAL INSTRUCTIONS FOR REDUX WAVE SERIES

PRICING: See Page 142 for 10-199 pricing; to price or order up to 599 pieces, visit www.leespring.com; 600+ pieces, contact Lee Spring.
CUSTOM DESIGNS: Custom Wave Spring designs are available on request; see Custom Springs Section for Wave Spring RFQ form.

HOW TO DETERMINE REDUX™ WAVE SPRING PRICING:

1. Select the spring you want by LEE STOCK NUMBER.
2. Read across to the PRICE GROUP to obtain price code number.
3. Refer to the PRICE GROUP below for quantities from 10-199 of any items.
4. Minimum Order: 10 of the same Lee Stock Number per REDUX Wave Spring ordered.
5. Prices shown are per spring per quantity; quantities cannot be combined to lower item pricing.
6. Prices effective January 2011; Terms Net 30 Days.
7. Small Order Shipping & Processing Charge: Prices for 1-9 pieces of the same Lee Stock Number will be charged at the 10 pieces price, plus an additional \$20.00 Shipping & Processing Charge per order.
8. For pricing or to place on-line orders of up to 599 pieces of an item, visit www.leespring.com.
9. For pricing over 599 pieces, please submit a request through www.leespring.com or contact us by email, fax or phone.

**FREE
SHIPPING**
on orders of
10 pieces
or more

PRICE GROUP	10-19 Each	20-49 Each	50-99 Each	100-199 Each
P1	3.75	2.24	1.59	1.11
P2	4.00	2.56	1.82	1.25
P3	4.25	2.72	1.93	1.34
P4	4.80	3.07	2.18	1.51
P5	5.25	3.36	2.39	1.67
P6	5.50	3.45	2.45	1.71
P7	6.00	3.81	2.71	1.89
P8	6.90	4.49	3.19	2.23
P9	7.15	4.65	3.30	2.31
P10	7.80	5.07	3.60	2.52
P11	8.10	5.24	3.72	2.60
P12	8.95	5.59	3.97	2.78
P13	9.60	6.05	4.29	3.01
P14	10.00	6.30	4.47	3.13
P15	10.40	6.50	4.62	3.18
P16	10.85	6.84	4.85	3.35
P17	11.20	7.06	5.01	3.46
P18	12.00	7.56	5.37	3.70
P19	12.50	7.88	5.59	3.86
P20	13.50	8.51	6.04	4.17
P21	14.50	9.14	6.49	4.48
P22	16.70	10.52	7.47	5.15
P23	18.45	11.62	8.25	5.69
P24	19.50	12.29	8.72	6.02

SPECIAL INSTRUCTIONS FOR REDUX WAVE SERIES


PRICING: See above for 10-199; to price or order up to 599 pieces, visit www.leespring.com; 600+ pieces, contact Lee Spring.
CUSTOM DESIGNS: Custom Wave Spring designs are available on request; see Custom Springs section for Wave Spring RFQ form.

HEFTY™

Die Springs • Heavy Duty Compression Springs

Costs 20% to 50% Less and Shipping is FREE!

**MEDIUM
LOAD**
COLOR CODE
GRAY



**MEDIUM
LOAD PLUS**
COLOR CODE
BEIGE



**MEDIUM
HEAVY LOAD**
COLOR CODE
PURPLE



**HEAVY
LOAD**
COLOR CODE
BLACK



**EXTRA HEAVY
LOAD**
COLOR CODE
ORANGE



Only HEFTY Die Springs offer you the economy of round wire and the durability of chrome silicon or music wire, plus the World Class Service you've come to expect from Lee Spring.

HEFTY Die Springs are ideal for any high stress, heavy load application. Our customers have found that our high-performance HEFTY Die Springs are also great for use in such diverse applications as clutches, brakes, farm machinery and aircraft mechanisms. And Lee Spring offers five different types of durable HEFTY Die Springs with different load ratings to fit standard diameters.

Recent independent testing conducted by the Institute of Spring Technology has proven that Lee Spring's HEFTY Die Springs have a life-expectancy equal to traditional rectangular wire die springs.

To find out what HEFTY Die Springs can do for your application as well as your budget, call us at 888-777-4647, or visit us at www.leespring.com

HEFTY SPRINGS

TIPS FOR SELECTING AND USING HEFTY DIE SPRINGS

- Determine if springs will be used for short run, average cycle long run, rapid cycle or extra stress and then refer to appropriate section (medium load, etc.).
- Use as many springs in the die as space permits with the least amount of deflection.
- The more rapidly a spring is cycled, the greater the need to operate within the ideal operating range.
- Make sure hole and rod sizes in die are properly matched with spring. Faulty spring guidance will cause buckling and possible spring failure.
- Preventive maintenance on dies should be performed on a regular basis and die springs should be replaced at appropriate intervals to prevent downtime.
- Replace all springs in a die at the same time. This will insure an even distribution of the load.
- Do not rework die springs by grinding the inside or outside diameter or by cutting off coils. This could result in premature spring failure and possible die damage.
- Please note that load calculations for HEFTY™ springs are based on a deflection that is a percentage of the Free Length. "Load at 50% Deflection" should be interpreted to mean 50% deflection of the Free Length. The following is a sample calculation for the "Load at 50% Deflection" for Part Number LHL 375A 01, where Free Length = 1 inch and Rate = 56 lb/in and 50% of Free Length = 1/2 inch. The load is calculated by using the formula (found on page 3):

$$P = R \times F \text{ or } R \times F = P \text{ (i.e. } 56 \text{ lb/in} \times 1/2 \text{ in} = 28 \text{ lb.)}$$

HEFTY SPRINGS: MEDIUM LOAD SERIES (COLOR CODE GRAY)

ROUND WIRE • Music Wire (M) or Chrome Silicon (C) [Ideal Operating Range: 25% to 35% of Free Length]

LEE STOCK NUMBER	HOLE DIAMETER		ROD DIAMETER		NOMINAL* OUTSIDE DIAMETER		MATERIAL	WIRE DIAMETER		FREE LENGTH		LOAD AT 50% DEFLECTION		SPRING RATE		SOLID HEIGHT	
	IN.	MM	IN.	MM	IN.	MM		IN.	MM	IN.	MM	LB.	KG	LB/IN.	KG/MM	IN.	MM
LHL 375A 01	3/8	9.53	3/16	4.76	.344	8.74	M	.052	1.32	1	25.40	28.00	12.70	56.0	1.000	.495	12.57
LHL 375A 02					.334	8.48		.052	1.32	1 1/4	31.75	30.00	13.60	48.0	.857	.615	15.62
LHL 375A 03					.339	8.61		.052	1.32	1 1/2	38.10	28.50	12.93	38.0	.679	.715	18.16
LHL 375A 04					.331	8.41		.052	1.32	1 3/4	44.45	29.75	13.49	34.0	.607	.850	21.59
LHL 375A 05					.339	8.61		.052	1.32	2	50.80	28.00	12.70	28.0	.500	.935	23.75
LHL 375A 06					.327	8.31		.052	1.32	2 1/2	63.50	30.00	13.60	24.0	.428	1.200	30.48
LHL 375A 07					.336	8.53		.052	1.32	3	76.20	27.00	12.25	18.0	.321	1.425	36.20
LHL 375A 08					.330	8.38		.052	1.32	6	152.40	28.50	12.93	9.5	.170	2.795	71.00
LHL 500A 01	1/2	12.70	9/32	7.14	.480	12.19	M	.070	1.78	1	25.40	50.00	22.68	100.0	1.786	.490	12.45
LHL 500A 02					.471	11.96		.072	1.83	1 1/4	31.75	57.50	26.08	92.0	1.643	.620	15.75
LHL 500A 03					.465	11.81		.072	1.83	1 1/2	38.10	57.00	25.86	76.0	1.357	.750	19.05
LHL 500A 04					.456	11.58		.072	1.83	1 3/4	44.45	59.50	26.99	68.0	1.214	.870	22.10
LHL 500A 05					.473	12.01		.075	1.91	2	50.80	64.00	29.03	64.0	1.143	.995	25.27
LHL 500A 06					.467	11.86		.075	1.91	2 1/2	63.50	65.00	29.48	52.0	.929	1.240	31.50
LHL 500A 07					.475	12.07		.075	1.91	3	76.20	60.00	27.22	40.0	.714	1.490	37.85
LHL 500A 08					.466	11.84		.072	1.83	3 1/2	88.90	52.50	23.81	30.0	.536	1.670	42.42
LHL 500A 09					.478	12.14		.075	1.91	4 1/2	114.30	56.25	25.51	25.0	.446	2.235	56.77
LHL 500A 10					.473	12.01		.075	1.91	5 1/2	139.70	57.75	26.20	21.0	.375	3.000	76.20
LHL 500A 11					.458	11.63		.072	1.83	6 1/2	165.10	52.00	23.59	16.0	.286	3.175	80.65
LHL 500A 12					.466	11.84		.070	1.78	7 1/2	190.50	41.25	18.71	11.0	.196	3.680	93.47
LHL 625A 01	5/8	15.88	11/32	8.73	.581	14.76	M	.082	2.08	1	25.40	65.50	29.71	131.0	2.339	.495	12.57
LHL 625A 02					.588	14.94		.087	2.21	1 1/4	31.75	80.00	36.29	128.0	2.286	.620	15.75
LHL 625A 03					.577	14.66		.087	2.21	1 1/2	38.10	81.00	36.74	108.0	1.929	.740	18.80
LHL 625A 04					.562	14.28		.087	2.21	1 3/4	44.45	84.00	38.10	96.0	1.714	.870	22.10
LHL 625A 05					.582	14.78		.090	2.29	2	50.80	88.00	39.92	88.0	1.572	.990	25.15
LHL 625A 06					.572	14.53		.087	2.21	2 1/2	63.50	75.00	34.02	60.0	1.071	1.225	31.12
LHL 625A 07					.578	14.68		.090	2.29	3	76.20	84.00	38.10	56.0	1.000	1.490	37.85
LHL 625A 08					.575	14.61		.090	2.29	3 1/2	88.90	84.00	38.10	48.0	.857	1.740	44.20
LHL 625A 09					.565	14.35		.090	2.29	4	101.60	88.00	39.92	44.0	.786	1.985	50.42
LHL 625A 10					.575	14.61		.090	2.29	6	152.40	84.00	38.10	28.0	.500	2.850	72.39
LHL 750A 01	3/4	19.05	3/8	9.52	.720	18.29	M	.095	2.41	1	25.40	80.00	36.29	160.0	2.857	.480	12.19
LHL 750A 02					.725	18.42		.098	2.49	1 1/4	31.75	81.25	36.85	130.0	2.322	.605	15.37
LHL 750A 03					.725	18.42		.100	2.54	1 1/2	38.10	86.25	39.12	115.0	2.054	.720	18.29
LHL 750A 04					.720	18.29		.100	2.54	1 3/4	44.45	87.50	39.69	100.0	1.786	.810	20.57
LHL 750A 05					.720	18.29		.102	2.59	2	50.80	90.00	40.82	90.0	1.607	.960	24.38
LHL 750A 06					.720	18.29		.102	2.59	2 1/2	63.50	87.50	39.12	70.0	1.250	1.170	29.72
LHL 750A 07					.720	18.29		.102	2.59	3	76.20	90.00	40.82	60.0	1.071	1.330	33.78
LHL 750A 08					.723	18.36		.105	2.67	3 1/2	88.90	96.25	43.66	55.0	.982	1.630	41.40
LHL 750A 09					.723	18.36		.105	2.67	4	101.60	100.00	45.36	50.0	.893	1.775	45.09
LHL 750A 10					.715	18.16		.105	2.67	4 1/2	114.30	101.25	45.93	45.0	.804	2.015	51.18
LHL 750A 11					.710	18.03		.105	2.67	5	127.00	100.00	45.36	40.0	.714	2.290	58.17
LHL 750A 12					.710	18.03		.105	2.67	5 1/2	139.70	96.25	43.66	35.0	.625	2.590	65.79
LHL 750A 13					.710	18.03		.105	2.67	6	152.40	97.50	44.23	32.5	.580	2.770	70.36

SPECIAL INSTRUCTIONS FOR HEFTY SPRINGS

PRICING: See page 154 for pricing up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: *Nominal Inside Diameter = Nominal Outside Diameter minus 2 times the wire diameter.

TEMPERATURE RANGE: Music Wire (M) – Temperature Range of up to 200° F; Chrome Silicon (C) – Temperature Range of up to 400° F.

HEFTY SPRINGS: MEDIUM LOAD SERIES (COLOR CODE GRAY)

ROUND WIRE • Music Wire (M) or Chrome Silicon (C) [Ideal Operating Range: 25% to 35% of Free Length]

LEE STOCK NUMBER	HOLE DIAMETER		ROD DIAMETER		NOMINAL* OUTSIDE DIAMETER		MATERIAL	WIRE DIAMETER		FREE LENGTH		LOAD AT 50% DEFLECTION		SPRING RATE		SOLID HEIGHT	
	IN.	MM	IN.	MM	IN.	MM		IN.	MM	IN.	MM	LB.	KG	LB/IN.	KG/MM	IN.	MM
LHL 1000A 01	1	25.40	1/2	12.70	.960	24.38	C	.125	3.18	1	25.40	135.00	61.24	270.0	4.822	.500	12.70
LHL 1000A 02					.965	24.51		.128	3.25	1 1/4	31.75	140.62	63.78	225.0	4.018	.625	15.88
LHL 1000A 03					.965	24.51		.128	3.25	1 1/2	38.10	135.00	61.24	180.0	3.214	.735	18.67
LHL 1000A 04					.950	24.13		.128	3.25	1 3/4	44.45	135.62	61.52	155.0	2.768	.835	21.21
LHL 1000A 05					.940	23.88		.128	3.25	2	50.80	135.00	61.24	135.0	2.411	.945	24.00
LHL 1000A 06					.965	24.51		.135	3.43	2 1/2	63.50	150.00	68.04	120.0	2.143	1.215	30.86
LHL 1000A 07					.960	24.38		.135	3.43	3	76.20	150.00	68.04	100.0	1.786	1.430	36.32
LHL 1000A 08					.960	24.38		.135	3.43	3 1/2	88.90	148.75	67.47	85.0	1.518	1.630	41.40
LHL 1000A 09					.960	24.38		.135	3.43	4	101.60	150.00	68.04	75.0	1.339	1.810	45.97
LHL 1000A 10					.940	23.88		.135	3.43	4 1/2	114.30	157.50	71.44	70.0	1.250	2.050	52.07
LHL 1000A 11					.940	23.88		.135	3.43	5	127.00	156.25	70.87	62.5	1.116	2.260	57.40
LHL 1000A 12					.940	23.88		.135	3.43	5 1/2	139.70	151.25	68.61	55.0	.982	2.525	64.14
LHL 1000A 13					.940	23.88		.135	3.43	6	152.40	150.00	68.04	50.0	.893	2.755	69.98
LHL 1250A 01	1 1/4	31.75	5/8	15.88	1.200	30.48	C	.156	3.96	1 1/2	38.10	202.50	91.85	270.0	4.822	.745	18.92
LHL 1250A 02					1.200	30.48		.156	3.96	1 3/4	44.45	192.50	87.32	220.0	3.929	.850	21.59
LHL 1250A 03					1.200	30.48		.156	3.96	2	50.80	190.00	86.18	190.0	3.393	.935	23.75
LHL 1250A 04					1.200	30.48		.162	4.11	2 1/2	63.50	212.50	96.39	170.0	3.036	1.175	29.85
LHL 1250A 05					1.215	30.86		.170	4.32	3	76.20	236.25	107.16	157.5	2.813	1.480	37.59
LHL 1250A 06					1.200	30.48		.170	4.32	3 1/2	88.90	245.00	111.13	140.0	2.500	1.685	42.80
LHL 1250A 07					1.200	30.48		.170	4.32	4	101.60	240.00	108.86	120.0	2.143	1.905	48.39
LHL 1250A 08					1.180	29.97		.170	4.32	4 1/2	114.30	247.50	112.26	110.0	1.964	2.150	54.61
LHL 1250A 09					1.170	29.72		.170	4.32	5	127.00	250.00	113.40	100.0	1.786	2.390	60.71
LHL 1250A 10					1.170	29.72		.170	4.32	5 1/2	139.70	247.50	112.26	90.0	1.607	2.620	66.55
LHL 1250A 11					1.170	29.72		.170	4.32	6	152.40	247.50	112.26	82.5	1.473	2.825	71.76
LHL 1500A 01	1 1/2	38.10	3/4	19.05	1.430	36.32	C	.187	4.75	2	50.80	280.00	127.01	280.0	5.000	.990	25.15
LHL 1500A 02					1.430	36.32		.192	4.88	2 1/2	63.50	300.00	136.08	240.0	4.286	1.215	30.86
LHL 1500A 03					1.390	35.31		.195	4.95	3	76.20	330.00	149.69	220.0	3.929	1.475	37.47
LHL 1500A 04					1.360	34.54		.195	4.95	3 1/2	88.90	341.25	154.79	195.0	3.482	1.715	43.56
LHL 1500A 05					1.450	36.83		.207	5.26	4	101.60	370.00	167.83	185.0	3.304	1.960	49.78
LHL 1500A 06					1.450	36.83		.207	5.26	4 1/2	114.30	360.00	163.29	160.0	2.857	2.205	56.01
LHL 1500A 07					1.430	36.32		.207	5.26	5	127.00	375.00	170.09	150.0	2.679	2.415	61.34
LHL 1500A 08					1.410	35.82		.207	5.26	5 1/2	139.70	385.00	174.63	140.0	2.500	2.670	67.82
LHL 1500A 09					1.385	35.18		.207	5.26	6	152.40	397.50	180.30	132.5	2.366	2.950	74.93
LHL 2000A 01	2	50.80	1	25.40	1.940	49.28	C	.262	6.65	2 1/2	63.50	562.50	255.15	450.0	8.036	1.250	31.75
LHL 2000A 02					1.880	47.75		.262	6.65	3	76.20	600.00	272.16	400.0	7.143	1.500	38.10
LHL 2000A 03					1.860	47.24		.262	6.65	3 1/2	88.90	595.00	269.89	340.0	6.072	1.715	43.56
LHL 2000A 04					1.840	46.74		.262	6.65	4	101.60	600.00	272.16	300.0	5.357	1.970	50.04
LHL 2000A 05					1.840	46.74		.262	6.65	4 1/2	114.30	596.25	270.46	265.0	4.732	2.170	55.12
LHL 2000A 06					1.830	46.48		.262	6.65	5	127.00	587.50	266.49	235.0	4.196	2.400	60.96
LHL 2000A 07					1.830	46.48		.262	6.65	5 1/2	139.70	591.25	268.19	215.0	3.839	2.680	68.07
LHL 2000A 08					1.795	45.59		.262	6.65	6	152.40	615.00	278.96	205.0	3.661	2.940	74.68

HEFTY SPRINGS



SPECIAL INSTRUCTIONS FOR HEFTY SPRINGS

PRICING: See page 154 for pricing up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: *Nominal Inside Diameter = Nominal Outside Diameter minus 2 times the wire diameter.
TEMPERATURE RANGE: Music Wire (M) – Temperature Range of up to 200° F; Chrome Silicon (C) – Temperature Range of up to 400° F.

HEFTY SPRINGS: MEDIUM LOAD PLUS SERIES (COLOR CODE BEIGE)

ROUND WIRE • Music Wire (M) or Chrome Silicon (C) [Ideal Operating Range: 25% to 35% of Free Length]

HEFTY SPRINGS

LEE STOCK NUMBER	HOLE DIAMETER		ROD DIAMETER		NOMINAL* OUTSIDE DIAMETER		MATERIAL	WIRE DIAMETER		FREE LENGTH		LOAD AT 37% DEFLECTION		SPRING RATE		SOLID HEIGHT	
	IN.	MM	IN.	MM	IN.	MM		IN.	MM	IN.	MM	LB.	KG	LB/IN.	KG/MM	IN.	MM
LHL 375AB 01	3/8	9.53	3/16	4.76	.340	8.64	M	.055	1.397	1	25.40	27.01	12.25	73.0	1.310	.574	14.57
LHL 375AB 02					.340	8.64		.055	1.397	1 1/4	31.75	27.75	12.59	60.0	1.074	.674	17.11
LHL 375AB 03					.340	8.64		.055	1.397	1 1/2	38.10	28.86	13.09	52.0	.930	.759	19.28
LHL 375AB 04					.340	8.64		.055	1.397	1 3/4	44.45	29.79	13.51	46.0	.823	.844	21.43
LHL 375AB 05					.340	8.64		.057	1.448	2	50.80	28.86	13.09	39.0	.698	1.169	29.69
LHL 375AB 06					.340	8.64		.057	1.448	2 1/2	63.50	30.53	13.85	33.0	.590	1.361	34.56
LHL 375AB 07					.340	8.64		.057	1.448	3	76.20	26.64	12.08	24.0	.429	1.826	46.39
LHL 375AB 08					.340	8.64		.057	1.448	6	152.40	28.86	13.09	13.0	.223	3.399	86.33
LHL 500AB 01	1/2	12.70	9/32	7.14	.475	12.07	M	.075	1.905	1	25.40	49.58	22.49	134.0	2.393	.582	14.78
LHL 500AB 02					.475	12.07		.075	1.905	1 1/4	31.75	49.95	22.66	108.0	1.929	.685	17.40
LHL 500AB 03					.475	12.07		.078	1.981	1 1/2	38.10	54.39	24.67	98.0	1.750	.888	22.55
LHL 500AB 04					.475	12.07		.078	1.981	1 3/4	44.45	55.69	25.26	86.0	1.536	.999	25.38
LHL 500AB 05					.475	12.07		.078	1.981	2	50.80	56.24	25.51	76.0	1.357	1.102	27.99
LHL 500AB 06					.475	12.07		.078	1.981	2 1/2	63.50	55.50	25.17	60.0	1.071	1.349	34.27
LHL 500AB 07					.475	12.07		.078	1.981	3	76.20	53.28	24.17	48.0	.857	1.648	41.86
LHL 500AB 08					.475	12.07		.078	1.981	3 1/2	88.90	49.21	22.32	38.0	.679	2.060	52.32
LHL 500AB 09					.475	12.07		.078	1.981	6	152.40	44.40	20.14	20.0	.357	3.726	94.63
LHL 625AB 01	5/8	15.88	11/32	8.73	.581	14.76	M	.091	2.311	1	25.40	72.15	32.73	195.0	3.482	.609	15.46
LHL 625AB 02					.585	14.86		.093	2.362	1 1/4	31.75	77.70	35.24	168.0	3.000	.731	18.58
LHL 625AB 03					.580	14.73		.095	2.413	1 1/2	38.10	82.70	37.51	149.0	2.661	.906	23.02
LHL 625AB 04					.570	14.48		.095	2.413	1 3/4	44.45	82.88	37.59	128.0	2.286	1.068	27.13
LHL 625AB 05					.590	14.99		.098	2.489	2	50.80	87.32	39.61	118.0	2.107	1.196	30.37
LHL 625AB 06					.590	14.99		.098	2.489	2 1/2	63.50	81.40	36.92	88.0	1.572	1.535	38.98
LHL 625AB 07					.590	14.99		.098	2.489	3	76.20	86.58	39.27	78.0	1.393	1.706	43.32
LHL 625AB 08					.580	14.73		.098	2.489	3 1/2	88.90	86.77	39.36	67.0	1.196	2.078	52.77
LHL 625AB 09					.580	14.73		.098	2.489	4	101.60	88.80	40.28	60.0	1.071	2.280	57.92
LHL 625AB 10					.580	14.73		.100	2.540	6	152.40	86.58	39.27	39.0	.696	3.788	96.22
LHL 750AB 01	3/4	19.05	3/8	9.53	.725	18.42	M	.112	2.845	1	25.40	101.01	45.82	273.0	4.875	.645	16.38
LHL 750AB 02					.720	18.29		.115	2.921	1 1/4	31.75	111.00	50.35	240.0	4.286	.796	20.22
LHL 750AB 03					.720	18.29		.115	2.921	1 1/2	38.10	107.12	48.59	193.0	3.447	.933	23.70
LHL 750AB 04					.695	17.65		.115	2.921	1 3/4	44.45	117.20	53.16	181.0	3.232	1.078	27.39
LHL 750AB 05					.680	17.27		.115	2.921	2	50.80	119.88	54.38	162.0	2.893	1.255	31.87
LHL 750AB 06					.685	17.40		.115	2.921	2 1/2	63.50	113.78	51.61	123.0	2.197	1.542	39.16
LHL 750AB 07					.700	17.78		.115	2.921	3	76.20	113.22	51.36	102.0	1.822	1.758	44.66
LHL 750AB 08					.700	17.78		.115	2.921	3 1/2	88.90	116.55	52.87	90.0	1.607	1.885	47.88
LHL 750AB 09					.690	17.53		.118	2.997	4	101.60	125.80	57.06	85.0	1.518	2.585	65.67
LHL 750AB 10					.680	17.27		.118	2.997	4 1/2	114.30	121.55	55.13	73.0	1.304	2.835	72.00
LHL 750AB 11					.670	17.02		.118	2.997	5	127.00	123.95	56.22	67.0	1.196	3.213	81.60
LHL 750AB 12					.670	17.02		.118	2.997	5 1/2	139.70	124.14	56.31	61.0	1.089	3.524	89.50
LHL 750AB 13					.680	17.27		.118	2.997	6	152.40	124.32	56.39	56.0	1.000	3.799	96.49

SPECIAL INSTRUCTIONS FOR HEFTY SPRINGS

PRICING: See page 154 for pricing up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: *Nominal Inside Diameter = Nominal Outside Diameter minus 2 times the wire diameter.

TEMPERATURE RANGE: Music Wire (M) – Temperature Range of up to 200° F; Chrome Silicon (C) – Temperature Range of up to 400° F.

HEFTY SPRINGS: MEDIUM LOAD PLUS SERIES (COLOR CODE BEIGE)

ROUND WIRE • Music Wire (M) or Chrome Silicon (C) [Ideal Operating Range: 25% to 35% of Free Length]

LEE STOCK NUMBER	HOLE DIAMETER		ROD DIAMETER		NOMINAL* OUTSIDE DIAMETER		MATERIAL	WIRE DIAMETER		FREE LENGTH		LOAD AT 37% DEFLECTION		SPRING RATE		SOLID HEIGHT	
	IN.	MM	IN.	MM	IN.	MM		IN.	MM	IN.	MM	LB.	KG	LB/IN.	KG/MM	IN.	MM
LHL 1000AB 01	1	25.40	1/2	12.70	.950	24.13	C	.140	3.556	1	25.40	160.21	72.67	433.0	7.733	.634	16.12
LHL 1000AB 02					.935	23.75		.142	3.607	1 1/4	31.75	169.28	76.78	366.0	6.536	.760	19.31
LHL 1000AB 03					.900	22.86		.144	3.658	1 1/2	38.10	182.59	82.83	329.0	5.875	.941	23.91
LHL 1000AB 04					.935	23.75		.148	3.759	1 3/4	44.45	189.07	85.76	292.0	5.215	1.043	26.50
LHL 1000AB 05					.935	23.75		.148	3.759	2	50.80	185.74	84.25	251.0	4.482	1.164	29.56
LHL 1000AB 06					.925	23.50		.148	3.759	2 1/2	63.50	188.70	85.59	204.0	3.643	1.404	35.66
LHL 1000AB 07					.925	23.50		.148	3.759	3	76.20	184.26	83.58	166.0	2.964	1.655	42.04
LHL 1000AB 08					.900	22.86		.148	3.759	3 1/2	88.90	194.25	88.11	150.0	2.679	1.953	49.60
LHL 1000AB 09					.950	24.13		.156	3.962	4	101.60	192.40	87.27	130.0	2.322	2.424	61.56
LHL 1000AB 10					.970	24.64		.156	3.962	4 1/2	114.30	184.82	83.83	111.0	1.982	2.606	66.19
LHL 1000AB 11					.970	24.64		.156	3.962	5	127.00	190.55	86.43	103.0	1.839	2.784	70.72
LHL 1000AB 12					.970	24.64		.156	3.962	5 1/2	139.70	187.22	84.92	92.0	1.643	3.079	78.20
LHL 1000AB 13					.970	24.64		.156	3.962	6	152.40	179.82	81.57	81.0	1.446	3.453	87.70
LHL 1250AB 01	1 1/4	31.75	5/8	15.88	1.200	30.48	C	.177	4.572	1 1/2	38.10	259.74	117.82	468.0	8.358	.934	23.73
LHL 1250AB 02					1.190	30.23		.177	4.572	1 3/4	44.45	261.59	118.66	404.0	7.215	1.043	26.50
LHL 1250AB 03					1.170	29.72		.177	4.572	2	50.80	265.66	120.50	359.0	6.411	1.175	29.85
LHL 1250AB 04					1.180	29.97		.187	4.750	2 1/2	63.50	294.15	133.43	318.0	5.679	1.472	37.39
LHL 1250AB 05					1.170	29.72		.192	4.877	3	76.20	318.57	144.50	287.0	5.125	1.832	46.54
LHL 1250AB 06					1.170	29.72		.192	4.877	3 1/2	88.90	319.87	145.09	247.0	4.411	2.070	52.59
LHL 1250AB 07					1.170	29.72		.192	4.877	4	101.60	319.68	145.01	216.0	3.857	2.307	58.60
LHL 1250AB 08					1.160	29.46		.192	4.877	4 1/2	114.30	323.01	146.52	194.0	3.464	2.575	65.41
LHL 1250AB 09					1.150	29.21		.192	4.877	5	127.00	325.60	147.69	176.0	3.143	2.896	73.57
LHL 1250AB 10					1.160	29.46		.192	4.877	5 1/2	139.70	319.50	144.92	157.0	2.804	3.109	78.96
LHL 1250AB 11					1.160	29.46		.192	4.877	6	152.40	319.68	145.01	144.0	2.572	3.354	85.18
LHL 1500AB 01	1 1/2	38.10	3/4	19.05	1.440	36.58	C	.218	5.537	2	50.80	378.88	171.86	512.0	9.143	1.230	31.24
LHL 1500AB 02					1.440	36.58		.218	5.537	2 1/2	63.50	355.20	161.12	384.0	6.857	1.490	37.86
LHL 1500AB 03					1.440	36.58		.225	5.715	3	76.20	389.61	176.73	351.0	6.268	1.819	46.20
LHL 1500AB 04					1.440	36.58		.234	5.944	3 1/2	88.90	467.56	212.06	361.0	6.447	2.123	53.92
LHL 1500AB 05					1.440	36.58		.234	5.944	4	101.60	436.60	198.04	295.0	5.268	2.490	63.23
LHL 1500AB 06					1.440	36.58		.234	5.944	4 1/2	114.30	427.91	194.10	257.0	4.590	2.785	70.74
LHL 1500AB 07					1.440	36.58		.234	5.944	5	127.00	462.50	209.79	250.0	4.465	2.851	72.42
LHL 1500AB 08					1.440	36.58		.234	5.944	5 1/2	139.70	427.35	193.85	210.0	3.750	3.302	83.88
LHL 1500AB 09					1.440	36.58		.234	5.944	6	152.40	444.00	201.40	200.0	3.572	3.440	87.38
LHL 2000AB 01	2	50.80	1	25.40	1.890	48.01	C	.283	7.188	2 1/2	63.50	641.03	290.77	693.0	12.376	1.518	38.56
LHL 2000AB 02					1.850	46.99		.283	7.188	3	76.20	652.68	296.06	588.0	10.501	1.772	45.00
LHL 2000AB 03					1.800	45.72		.283	7.188	3 1/2	88.90	669.52	303.69	517.0	9.233	2.073	52.66
LHL 2000AB 04					1.790	45.47		.283	7.188	4	101.60	671.92	304.78	454.0	8.108	2.311	58.71
LHL 2000AB 05					1.760	44.70		.283	7.188	4 1/2	114.30	682.65	309.65	410.0	7.322	2.616	66.45
LHL 2000AB 06					1.730	43.94		.283	7.188	5	127.00	691.90	313.85	374.0	6.679	2.954	75.03
LHL 2000AB 07					1.720	43.69		.283	7.188	5 1/2	139.70	689.01	316.62	343.0	6.125	3.227	81.97
LHL 2000AB 08					1.700	43.18		.283	7.188	6	152.40	701.52	318.21	316.0	5.643	3.572	90.73

HEFTY SPRINGS



SPECIAL INSTRUCTIONS FOR HEFTY SPRINGS

PRICING: See page 154 for pricing up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: *Nominal Inside Diameter = Nominal Outside Diameter minus 2 times the wire diameter.
TEMPERATURE RANGE: Music Wire (M) – Temperature Range of up to 200° F; Chrome Silicon (C) – Temperature Range of up to 400° F.

HEFTY SPRINGS: MEDIUM HEAVY LOAD SERIES (COLOR CODE PURPLE)

ROUND WIRE • Music Wire (M) or Chrome Silicon (C) [Ideal Operating Range: 20% to 25% of Free Length]

HEFTY SPRINGS

LEE STOCK NUMBER	HOLE DIAMETER		ROD DIAMETER		NOMINAL* OUTSIDE DIAMETER		MATERIAL	WIRE DIAMETER		FREE LENGTH		LOAD AT 37% DEFLECTION		SPRING RATE		SOLID HEIGHT	
	IN.	MM	IN.	MM	IN.	MM		IN.	MM	IN.	MM	LB.	KG	LB/IN.	KG/MM	IN.	MM
LHL 375B 01	3/8	9.53	3/16	4.76	.343	8.71	M	.058	1.47	1	25.40	33.30	15.10	90.0	1.607	.585	14.86
LHL 375B 02					.337	8.56		.058	1.47	1 1/4	31.75	33.76	15.31	73.0	1.304	.730	18.54
LHL 375B 03					.325	8.26		.058	1.47	1 1/2	38.10	37.19	16.87	67.0	1.196	.875	22.23
LHL 375B 04					.330	8.38		.059	1.50	1 3/4	44.45	37.56	17.03	58.0	1.036	1.040	26.42
LHL 375B 05					.329	8.36		.059	1.50	2	50.80	37.00	16.78	50.0	.893	1.185	30.10
LHL 375B 06					.327	8.31		.059	1.50	2 1/2	63.50	38.85	17.62	42.0	.750	1.420	36.07
LHL 375B 07					.328	8.33		.058	1.47	3	76.20	33.30	15.10	30.0	.536	1.750	44.45
LHL 375B 08					.330	8.38		.058	1.47	6	152.40	33.30	15.10	15.0	.268	3.320	84.33
LHL 500B 01	1/2	12.70	9/32	7.14	.461	11.71	M	.078	1.98	1	25.40	62.16	28.20	168.0	3.000	.605	15.37
LHL 500B 02					.466	11.84		.080	2.03	1 1/4	31.75	64.29	29.16	139.0	2.482	.765	19.43
LHL 500B 03					.455	11.56		.080	2.03	1 1/2	3.81	66.60	30.21	120.0	2.143	.920	23.37
LHL 500B 04					.460	11.68		.080	2.03	1 3/4	44.45	67.34	30.55	104.0	1.857	1.010	25.65
LHL 500B 05					.461	11.71		.080	2.03	2	50.80	64.38	29.20	87.0	1.554	1.170	29.72
LHL 500B 06					.461	11.71		.080	2.03	2 1/2	63.50	62.90	28.53	68.0	1.214	1.450	36.83
LHL 500B 07					.461	11.71		.080	2.03	3	76.20	63.27	28.70	57.0	1.018	1.690	42.93
LHL 500B 08					.461	11.71		.080	2.03	3 1/2	88.90	60.87	27.61	47.0	.839	2.020	51.31
LHL 500B 09					.461	11.71		.080	2.03	6	152.40	59.94	27.19	27.0	.482	3.400	86.36
LHL 625B 01	5/8	15.88	11/32	8.73	.581	14.76	M	.098	2.49	1	25.40	102.49	46.49	277.0	4.947	.615	15.62
LHL 625B 02					.578	14.68		.098	2.49	1 1/4	31.75	96.20	43.64	208.0	3.714	.765	19.43
LHL 625B 03					.571	14.50		.100	2.54	1 1/2	38.10	105.45	47.83	190.0	3.393	.930	23.62
LHL 625B 04					.580	14.73		.102	2.59	1 3/4	44.45	108.78	49.34	168.0	3.000	1.080	27.43
LHL 625B 05					.574	14.58		.102	2.59	2	50.80	109.52	49.68	148.0	2.643	1.230	31.24
LHL 625B 06					.572	14.53		.102	2.59	2 1/2	63.50	106.38	48.25	115.0	2.054	1.535	38.99
LHL 625B 07					.586	14.88		.105	2.67	3	76.20	111.00	50.35	100.0	1.786	1.865	47.37
LHL 625B 08					.586	14.88		.105	2.67	3 1/2	88.90	110.08	49.93	85.0	1.518	2.160	54.86
LHL 625B 09					.582	14.78		.105	2.67	4	101.60	112.48	51.02	76.0	1.357	2.450	62.23
LHL 625B 10					.577	14.66		.105	2.67	6	152.40	111.00	50.35	50.0	.893	3.715	94.36
LHL 750B 01	3/4	19.05	3/8	9.52	.710	18.03	C	.120	3.05	1	25.40	166.50	75.52	450.0	8.036	.630	16.00
LHL 750B 02					.725	18.42		.125	3.18	1 1/4	31.75	178.06	80.77	385.0	6.875	.780	19.81
LHL 750B 03					.715	18.16		.125	3.18	1 1/2	38.10	177.60	80.56	320.0	5.715	.925	23.50
LHL 750B 04					.695	17.65		.125	3.18	1 3/4	44.45	186.48	84.59	288.0	5.143	1.080	27.43
LHL 750B 05					.690	17.53		.125	3.18	2	50.80	183.52	83.24	248.0	4.429	1.240	31.50
LHL 750B 06					.690	17.53		.125	3.18	2 1/2	63.50	177.60	80.56	192.0	3.429	1.525	38.74
LHL 750B 07					.710	18.03		.125	3.18	3	76.20	159.84	72.50	144.0	2.572	1.780	45.21
LHL 750B 08					.700	17.78		.125	3.18	3 1/2	88.90	165.76	75.19	128.0	2.286	2.065	52.45
LHL 750B 09					.680	17.27		.125	3.18	4	101.60	177.60	80.56	120.0	2.143	2.400	60.96
LHL 750B 10					.655	16.89		.125	3.18	4 1/2	114.30	186.48	84.59	112.0	2.000	2.750	69.85
LHL 750B 11					.655	16.64		.125	3.18	5	127.00	192.40	87.27	104.0	1.857	3.095	78.61
LHL 750B 12					.650	16.51		.125	3.18	5 1/2	139.70	195.36	88.61	96.0	1.714	3.420	86.87
LHL 750B 13					.675	17.15		.125	3.18	6	152.40	177.60	80.56	80.0	1.429	3.560	90.42

SPECIAL INSTRUCTIONS FOR HEFTY SPRINGS

PRICING: See page 154 for pricing up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: *Nominal Inside Diameter = Nominal Outside Diameter minus 2 times the wire diameter.

TEMPERATURE RANGE: Music Wire (M) – Temperature Range of up to 200° F; Chrome Silicon (C) – Temperature Range of up to 400° F.

HEFTY SPRINGS: MEDIUM HEAVY LOAD SERIES (COLOR CODE PURPLE)

ROUND WIRE • Music Wire (M) or Chrome Silicon (C) [Ideal Operating Range: 20% to 25% of Free Length]

LEE STOCK NUMBER	HOLE DIAMETER		ROD DIAMETER		NOMINAL* OUTSIDE DIAMETER		MATERIAL	WIRE DIAMETER		FREE LENGTH		LOAD AT 37% DEFLECTION		SPRING RATE		SOLID HEIGHT	
	IN.	MM	IN.	MM	IN.	MM		IN.	MM	IN.	MM	LB.	KG	LB/IN.	KG/MM	IN.	MM
LHL 1000B 01	1	25.40	1/2	12.70	.940	23.88	C	.148	3.76	1	25.40	229.40	104.06	620.0	11.072	.630	16.00
LHL 1000B 02					.955	24.26		.156	3.96	1 1/4	31.75	259.00	117.48	560.0	10.000	.780	19.81
LHL 1000B 03					.910	23.11		.156	3.96	1 1/2	38.10	275.28	124.87	496.0	8.858	.940	23.88
LHL 1000B 04					.945	24.00		.162	4.11	1 3/4	44.45	284.90	129.23	440.0	7.858	1.090	27.69
LHL 1000B 05					.950	24.13		.162	4.11	2	50.80	272.32	123.52	368.0	6.572	1.225	31.12
LHL 1000B 06					.945	24.00		.162	4.11	2 1/2	63.50	266.40	120.84	288.0	5.143	1.495	37.97
LHL 1000B 07					.945	24.00		.162	4.11	3	76.20	257.52	116.81	232.0	4.143	1.780	45.21
LHL 1000B 08					.910	23.11		.162	4.11	3 1/2	88.90	279.72	126.88	216.0	3.857	2.110	53.59
LHL 1000B 09					.915	23.24		.162	4.11	4	101.60	272.32	123.52	184.0	3.286	2.380	60.45
LHL 1000B 10					.935	23.75		.162	4.11	4 1/2	114.30	253.08	114.80	152.0	2.714	2.620	66.55
LHL 1000B 11					.915	23.24		.162	4.11	5	127.00	266.40	120.84	144.0	2.572	2.945	74.80
LHL 1000B 12					.920	23.37		.162	4.11	5 1/2	139.70	260.48	118.15	128.0	2.286	3.215	81.66
LHL 1000B 13					.935	23.75		.162	4.11	6	152.40	248.64	112.78	112.0	2.000	3.440	87.38
LHL 1250B 01	1 1/4	31.75	5/8	15.88	1.200	30.48	C	.195	4.95	1 1/2	38.10	402.38	182.52	725.0	12.947	.945	24.00
LHL 1250B 02					1.190	30.23		.195	4.95	1 3/4	44.45	388.50	176.22	600.0	10.715	1.080	27.43
LHL 1250B 03					1.160	29.46		.195	4.95	2	50.80	399.60	181.26	540.0	9.643	1.235	31.37
LHL 1250B 04					1.195	30.35		.207	5.26	2 1/2	63.50	462.50	209.79	500.0	8.929	1.555	39.50
LHL 1250B 05					1.165	29.59		.207	5.26	3	76.20	477.30	216.50	430.0	7.679	1.865	47.37
LHL 1250B 06					1.160	29.46		.207	5.26	3 1/2	88.90	472.68	214.40	365.0	6.518	2.150	54.61
LHL 1250B 07					1.160	29.46		.207	5.26	4	101.60	466.20	211.47	315.0	5.625	2.425	61.60
LHL 1250B 08					1.145	29.08		.207	5.26	4 1/2	114.30	474.52	215.24	285.0	5.090	2.750	69.85
LHL 1250B 09					1.140	28.96		.207	5.26	5	127.00	471.75	213.98	255.0	4.554	3.065	77.85
LHL 1250B 10					1.150	29.21		.207	5.26	5 1/2	139.70	457.88	207.69	225.0	4.018	3.320	84.33
LHL 1250B 11					1.150	29.21		.207	5.26	6	152.40	455.10	206.43	205.0	3.661	3.605	91.57
LHL 1500B 01	1 1/2	38.10	3/4	19.05	1.425	36.20	C	.234	5.94	2	50.80	551.30	250.07	745.0	13.304	1.250	31.75
LHL 1500B 02					1.415	35.94		.243	6.17	2 1/2	63.50	647.50	293.70	700.0	12.501	1.570	39.88
LHL 1500B 03					1.410	35.81		.243	6.17	3	76.20	621.60	281.96	560.0	10.000	1.865	47.37
LHL 1500B 04					1.415	35.94		.250	6.35	3 1/2	88.90	683.76	310.15	528.0	9.429	2.190	55.63
LHL 1500B 05					1.385	35.18		.250	6.35	4	101.60	710.40	322.24	480.0	8.572	2.505	63.63
LHL 1500B 06					1.370	34.80		.250	6.35	4 1/2	114.30	719.28	326.26	432.0	7.715	2.820	71.63
LHL 1500B 07					1.390	35.31		.250	6.35	5	127.00	680.80	308.81	368.0	6.572	3.085	78.36
LHL 1500B 08					1.370	34.80		.250	6.35	5 1/2	139.70	700.04	317.54	344.0	6.143	3.415	86.74
LHL 1500B 09					1.385	35.18		.250	6.35	6	152.40	674.88	306.12	304.0	5.429	3.670	93.22
LHL 2000B 01	2	50.80	1	25.40	1.950	49.53	C	.312	7.92	2 1/2	63.50	948.13	430.07	1025.0	18.304	1.570	39.88
LHL 2000B 02					1.900	48.26		.312	7.92	3	76.20	943.50	427.97	850.0	15.179	1.880	47.75
LHL 2000B 03					1.840	46.74		.312	7.92	3 1/2	88.90	997.15	452.30	770.0	13.751	2.180	55.37
LHL 2000B 04					1.830	46.48		.312	7.92	4	101.60	982.72	445.76	664.0	11.858	2.460	62.48
LHL 2000B 05					1.800	45.72		.312	7.92	4 1/2	114.30	999.00	453.14	600.0	10.715	2.785	70.74
LHL 2000B 06					1.950	49.53		.331	8.41	5	127.00	1036.00	469.93	560.0	10.000	3.080	78.23
LHL 2000B 07					1.950	49.53		.331	8.41	5 1/2	139.70	1025.64	465.23	504.0	9.000	3.345	84.96
LHL 2000B 08					1.930	49.02		.331	8.41	6	152.40	1047.84	475.30	472.0	8.429	3.635	92.33

HEFTY SPRINGS



SPECIAL INSTRUCTIONS FOR HEFTY SPRINGS

PRICING: See page 154 for pricing up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: *Nominal Inside Diameter = Nominal Outside Diameter minus 2 times the wire diameter.
TEMPERATURE RANGE: Music Wire (M) – Temperature Range of up to 200° F; Chrome Silicon (C) – Temperature Range of up to 400° F.

HEFTY SPRINGS: HEAVY LOAD SERIES (COLOR CODE BLACK)

ROUND WIRE • Music Wire (M) or Chrome Silicon (C) [Ideal Operating Range: 15% to 20% of Free Length]

LEE STOCK NUMBER	HOLE DIAMETER		ROD DIAMETER		NOMINAL* OUTSIDE DIAMETER		MATERIAL	WIRE DIAMETER		FREE LENGTH		LOAD AT 30% DEFLECTION		SPRING RATE		SOLID HEIGHT	
	IN.	MM	IN.	MM	IN.	MM		IN.	MM	IN.	MM	LB.	KG	LB/IN.	KG/MM	IN.	MM
LHL 375C 01	3/8	9.53	3/16	4.76	.342	8.69	M	.062	1.57	1	25.40	37.20	16.87	124.0	2.214	.625	15.88
LHL 375C 02					.345	8.76		.062	1.57	1 1/4	31.75	36.75	16.67	98.0	1.750	.735	18.67
LHL 375C 03					.348	8.84		.065	1.65	1 1/2	38.10	43.20	19.60	96.0	1.714	.920	23.37
LHL 375C 04					.345	8.76		.065	1.65	1 3/4	44.45	44.10	20.00	84.0	1.500	1.060	26.92
LHL 375C 05					.345	8.76		.065	1.65	2	50.80	43.20	19.60	72.0	1.286	1.215	30.86
LHL 375C 06					.355	9.02		.067	1.70	2 1/2	63.50	45.00	20.41	60.0	1.071	1.525	38.74
LHL 375C 07					.355	9.02		.065	1.65	3	76.20	37.80	17.15	42.0	.750	1.800	45.72
LHL 375C 08					.345	8.76		.065	1.65	6	152.40	40.50	18.37	22.5	.402	3.590	91.19
LHL 500C 01	1/2	12.70	9/32	7.14	.475	12.07	M	.085	2.16	1	25.40	70.80	32.11	236.0	4.214	.640	16.26
LHL 500C 02					.475	12.07		.085	2.16	1 1/4	31.75	69.75	31.64	186.0	3.322	.765	19.43
LHL 500C 03					.477	12.12		.087	2.21	1 1/2	38.10	73.80	33.48	164.0	2.929	.935	23.75
LHL 500C 04					.477	12.12		.087	2.21	1 3/4	44.45	72.45	32.86	138.0	2.464	1.075	27.31
LHL 500C 05					.475	12.07		.085	2.16	2	50.80	66.00	29.94	110.0	1.964	1.350	34.29
LHL 500C 06					.475	12.07		.085	2.16	2 1/2	63.50	63.00	28.58	84.0	1.500	1.485	37.72
LHL 500C 07					.477	12.12		.087	2.21	3	76.20	66.60	30.21	74.0	1.321	1.855	47.12
LHL 500C 08					.477	12.12		.087	2.21	3 1/2	88.90	67.20	30.48	64.0	1.143	2.110	53.59
LHL 500C 09					.477	12.12		.087	2.21	6	152.40	66.60	30.21	37.0	.661	3.525	89.54
LHL 625C 01	5/8	15.88	11/32	8.73	.592	15.04	M	.109	2.77	1	25.40	127.20	57.70	424.0	7.572	.685	17.40
LHL 625C 02					.600	15.24		.109	2.77	1 1/4	31.75	111.00	50.35	296.0	5.286	.855	21.72
LHL 625C 03					.583	14.81		.109	2.77	1 1/2	38.10	122.40	55.52	272.0	4.857	.985	25.02
LHL 625C 04					.595	15.11		.112	2.84	1 3/4	44.45	126.00	57.15	240.0	4.286	1.165	29.59
LHL 625C 05					.589	14.96		.112	2.84	2	50.80	124.80	56.61	208.0	3.714	1.350	34.29
LHL 625C 06					.590	14.99		.112	2.84	2 1/2	63.50	127.50	57.83	170.0	3.036	1.600	40.64
LHL 625C 07					.590	14.99		.112	2.84	3	76.20	129.60	58.79	144.0	2.572	1.840	46.74
LHL 625C 08					.590	14.99		.112	2.84	3 1/2	88.90	128.10	58.11	122.0	2.179	2.135	54.23
LHL 625C 09					.595	15.11		.115	2.92	4	101.60	129.60	58.79	108.0	1.929	2.660	67.56
LHL 625C 10					.595	15.11		.115	2.92	6	152.40	126.00	57.15	70.0	1.250	3.975	100.97
LHL 750C 01	3/4	19.05	3/8	9.52	.710	18.03	C	.135	3.43	1	25.40	238.50	108.18	795.0	14.197	.700	17.78
LHL 750C 02					.720	18.29		.142	3.61	1 1/4	31.75	273.75	124.17	730.0	13.036	.875	22.23
LHL 750C 03					.710	18.03		.142	3.61	1 1/2	38.10	272.25	123.49	605.0	10.804	1.040	26.42
LHL 750C 04					.710	18.03		.142	3.61	1 3/4	44.45	262.50	119.07	500.0	8.929	1.200	30.48
LHL 750C 05					.710	18.03		.142	3.61	2	50.80	255.00	136.08	425.0	7.590	1.360	34.54
LHL 750C 06					.710	18.03		.142	3.61	2 1/2	63.50	247.50	112.26	330.0	5.893	1.670	42.42
LHL 750C 07					.730	18.54		.148	3.76	3	76.20	270.00	122.47	300.0	5.357	2.030	51.56
LHL 750C 08					.730	18.54		.148	3.76	3 1/2	88.90	267.75	121.45	255.0	4.554	2.340	59.44
LHL 750C 09					.730	18.54		.148	3.76	4	101.60	264.00	119.75	220.0	3.929	2.660	67.56
LHL 750C 10					.730	18.54		.148	3.76	4 1/2	114.30	263.25	119.41	195.0	3.482	2.965	75.31
LHL 750C 11					.725	18.42		.148	3.76	5	127.00	264.00	119.75	176.0	3.143	3.330	84.58
LHL 750C 12					.725	18.42		.148	3.76	5 1/2	139.70	264.00	119.75	160.0	2.857	3.630	92.20
LHL 750C 13					.725	18.42		.148	3.76	6	152.40	259.20	117.57	144.0	2.572	4.010	101.85

SPECIAL INSTRUCTIONS FOR HEFTY SPRINGS

PRICING: See page 154 for pricing up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: *Nominal Inside Diameter = Nominal Outside Diameter minus 2 times the wire diameter.

TEMPERATURE RANGE: Music Wire (M) – Temperature Range of up to 200° F; Chrome Silicon (C) – Temperature Range of up to 400° F.

HEFTY SPRINGS: HEAVY LOAD SERIES (COLOR CODE BLACK)

ROUND WIRE • Music Wire (M) or Chrome Silicon (C) [Ideal Operating Range: 15% to 20% of Free Length]

LEE STOCK NUMBER	HOLE DIAMETER		ROD DIAMETER		NOMINAL* OUTSIDE DIAMETER		MATERIAL	WIRE DIAMETER		FREE LENGTH		LOAD AT 30% DEFLECTION		SPRING RATE		SOLID HEIGHT	
	IN.	MM	IN.	MM	IN.	MM		IN.	MM	IN.	MM	LB.	KG	LB/IN.	KG/MM	IN.	MM
LHL 1000C 01	1	25.40	1/2	12.70	.975	24.77	C	.170	4.32	1	25.40	330.00	149.39	1100.0	19.643	.700	17.78
LHL 1000C 02					.965	24.52		.177	4.50	1 1/4	31.75	375.00	170.10	1000.0	17.858	.865	21.97
LHL 1000C 03					.915	23.24		.177	4.50	1 1/2	38.10	405.00	183.71	900.0	16.072	1.045	26.54
LHL 1000C 04					.890	22.61		.177	4.50	1 3/4	44.45	420.00	190.51	800.0	14.286	1.220	30.99
LHL 1000C 05					.915	23.24		.183	4.65	2	50.80	441.00	200.04	735.0	13.126	1.395	35.43
LHL 1000C 06					.935	23.75		.187	4.75	2 1/2	63.50	442.50	200.72	590.0	10.536	1.715	43.56
LHL 1000C 07					.935	23.75		.187	4.75	3	76.20	432.00	195.95	480.0	8.572	2.020	51.31
LHL 1000C 08					.935	23.75		.187	4.75	3 1/2	88.90	420.00	190.51	400.0	7.143	2.350	59.69
LHL 1000C 09					.935	23.75		.187	4.75	4	101.60	414.00	187.79	345.0	6.161	2.660	67.56
LHL 1000C 10					.935	23.75		.187	4.75	4 1/2	114.30	411.75	186.77	305.0	5.447	2.960	75.18
LHL 1000C 11					.960	24.38		.192	4.88	5	127.00	427.50	193.91	285.0	5.090	3.300	83.82
LHL 1000C 12					.960	24.38		.192	4.88	5 1/2	139.70	429.00	194.59	260.0	4.643	3.580	90.93
LHL 1000C 13					.960	24.38		.192	4.88	6	152.40	423.00	191.87	235.0	4.197	3.915	99.44
LHL 1250C 01	1 1/4	31.75	5/8	15.88	1.190	30.23	C	.225	5.72	1 1/2	38.10	607.50	275.56	1350.0	24.108	1.045	26.54
LHL 1250C 02					1.190	30.23		.225	5.72	1 3/4	44.45	577.50	261.95	1100.0	19.644	1.185	30.10
LHL 1250C 03					1.190	30.23		.225	5.72	2	50.80	600.00	272.16	1000.0	17.858	1.380	35.05
LHL 1250C 04					1.190	30.23		.234	5.94	2 1/2	63.50	682.50	309.58	910.0	16.251	1.740	44.20
LHL 1250C 05					1.180	29.97		.234	5.94	3	76.20	675.00	306.18	750.0	13.394	2.060	52.32
LHL 1250C 06					1.200	30.48		.243	6.17	3 1/2	88.90	750.75	340.54	715.0	12.768	2.435	61.85
LHL 1250C 07					1.195	30.35		.243	6.17	4	101.60	750.00	340.20	625.0	11.161	2.755	69.98
LHL 1250C 08					1.195	30.35		.243	6.17	4 1/2	114.30	735.75	333.73	545.0	9.733	3.085	78.36
LHL 1250C 09					1.195	30.35		.243	6.17	5	127.00	720.00	326.59	480.0	8.572	3.435	87.25
LHL 1250C 10					1.195	30.35		.243	6.17	5 1/2	139.70	709.50	321.83	430.0	7.679	3.780	96.01
LHL 1250C 11					1.195	30.35		.243	6.17	6	152.40	702.00	318.42	390.0	6.965	4.115	104.52
LHL 1500C 01	1 1/2	38.10	3/4	19.05	1.445	36.70	C	.262	6.65	2	50.80	750.00	340.20	1250.0	22.322	1.385	35.18
LHL 1500C 02					1.455	36.96		.273	6.93	2 1/2	63.50	843.75	382.72	1125.0	20.090	1.725	43.82
LHL 1500C 03					1.400	35.56		.273	6.93	3	76.20	900.00	408.24	1000.0	17.858	2.075	52.71
LHL 1500C 04					1.430	36.32		.283	7.19	3 1/2	88.90	976.50	442.94	930.0	16.608	2.430	61.72
LHL 1500C 05					1.420	36.07		.283	7.19	4	101.60	978.00	443.62	815.0	14.554	2.755	69.98
LHL 1500C 06					1.420	36.07		.283	7.19	4 1/2	114.30	958.50	434.77	710.0	12.679	3.080	78.23
LHL 1500C 07					1.415	35.94		.283	7.19	5	127.00	952.50	432.05	635.0	11.340	3.405	86.49
LHL 1500C 08					1.415	35.94		.283	7.19	5 1/2	139.70	940.50	426.61	570.0	10.179	3.735	94.87
LHL 1500C 09					1.415	35.94		.283	7.19	6	152.40	927.00	420.48	515.0	9.197	4.075	103.51
LHL 2000C 01	2	50.80	1	25.40	1.895	48.13	C	.343	8.71	2 1/2	63.50	1293.75	586.84	1725.0	30.805	1.745	44.32
LHL 2000C 02					1.840	46.74		.343	8.71	3	76.20	1305.00	591.94	1450.0	25.894	2.090	53.09
LHL 2000C 03					1.840	46.74		.343	8.71	3 1/2	88.90	1260.00	571.53	1200.0	21.430	2.390	60.71
LHL 2000C 04					1.820	46.23		.343	8.71	4	101.60	1260.00	571.53	1050.0	18.751	2.715	68.96
LHL 2000C 05					1.930	49.02		.362	9.19	4 1/2	114.30	1370.25	621.54	1015.0	18.126	3.015	76.58
LHL 2000C 06					1.880	47.75		.362	9.19	5	127.00	1440.00	653.18	960.0	17.144	3.400	86.36
LHL 2000C 07					1.870	47.50		.362	9.19	5 1/2	139.70	1443.75	654.88	875.0	15.626	3.715	94.36
LHL 2000C 08					1.860	47.24		.362	9.19	6	152.40	1440.00	653.54	800.0	14.286	4.060	103.12

HEFTY SPRINGS



SPECIAL INSTRUCTIONS FOR HEFTY SPRINGS

PRICING: See page 154 for pricing up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: *Nominal Inside Diameter = Nominal Outside Diameter minus 2 times the wire diameter.
TEMPERATURE RANGE: Music Wire (M) – Temperature Range of up to 200° F; Chrome Silicon (C) – Temperature Range of up to 400° F.

HEFTY SPRINGS: EXTRA HEAVY LOAD SERIES (COLOR CODE ORANGE)

ROUND WIRE • Music Wire (M) or Chrome Silicon (C) [Ideal Operating Range: 10% to 15% of Free Length]

LEE STOCK NUMBER	HOLE DIAMETER		ROD DIAMETER		NOMINAL* OUTSIDE DIAMETER		MATERIAL	WIRE DIAMETER		FREE LENGTH		LOAD AT 25% DEFLECTION		SPRING RATE		SOLID HEIGHT	
	IN.	MM	IN.	MM	IN.	MM		IN.	MM	IN.	MM	LB.	KG	LB/IN.	KG/MM	IN.	MM
LHL 375D 01	3/8	9.53	3/16	4.76	.345	8.76	M	.070	1.78	1	25.40	55.00	24.95	220.0	3.929	.685	17.40
LHL 375D 02					.345	8.76		.070	1.78	1 1/4	31.75	53.13	24.10	170.0	3.036	.845	21.46
LHL 375D 03					.347	8.81		.071	1.80	1 1/2	38.10	54.38	24.66	145.0	2.589	1.020	25.91
LHL 375D 04					.354	8.99		.071	1.80	1 3/4	44.45	50.31	22.82	115.0	2.054	1.160	29.46
LHL 375D 05					.345	8.76		.070	1.78	2	50.80	50.00	22.68	100.0	1.786	1.340	34.04
LHL 375D 06					.352	8.94		.071	1.80	2 1/2	63.50	50.00	22.68	80.0	1.429	1.645	41.78
LHL 375D 07					.353	8.97		.071	1.80	3	76.20	48.75	22.11	65.0	1.161	1.960	49.78
LHL 375D 08					.353	8.97		.071	1.80	6	152.40	48.00	21.77	32.0	.571	3.845	97.66
LHL 500D 01	1/2	12.70	9/32	7.14	.480	12.19	M	.092	2.34	1	25.40	80.00	36.29	320.0	5.715	.695	17.65
LHL 500D 02					.480	12.19		.092	2.34	1 1/4	31.75	75.00	34.02	240.0	4.286	.865	21.97
LHL 500D 03					.480	12.19		.092	2.34	1 1/2	38.01	75.00	34.02	200.0	3.572	1.000	25.40
LHL 500D 04					.480	12.19		.092	2.34	1 3/4	44.45	74.38	33.74	170.0	3.036	1.145	29.08
LHL 500D 05					.480	12.19		.092	2.34	2	50.80	70.00	31.75	140.0	2.500	1.350	34.29
LHL 500D 06					.480	12.19		.092	2.34	2 1/2	63.50	71.88	32.60	115.0	2.054	1.605	40.77
LHL 500D 07					.480	12.19		.092	2.34	3	76.20	67.50	30.62	90.0	1.607	1.995	50.67
LHL 500D 08					.480	12.19		.092	2.34	3 1/2	88.90	70.00	31.75	80.0	1.429	2.220	56.39
LHL 500D 09					.480	12.19		.092	2.34	6	152.40	67.50	30.62	45.0	.804	3.800	96.52
LHL 625D 01	5/8	15.88	11/32	8.73	.600	15.24	M	.118	3.00	1	25.40	157.50	71.44	630.0	11.250	.705	17.91
LHL 625D 02					.600	15.24		.118	3.00	1 1/4	31.75	146.88	66.62	470.0	8.393	.865	21.97
LHL 625D 03					.600	15.24		.118	3.00	1 1/2	38.10	142.50	64.64	380.0	6.786	1.015	25.78
LHL 625D 04					.600	15.24		.118	3.00	1 3/4	44.45	140.00	63.50	320.0	5.715	1.160	29.46
LHL 625D 05					.600	15.24		.120	3.05	2	50.80	145.00	65.77	290.0	5.178	1.365	34.67
LHL 625D 06					.600	15.24		.120	3.05	2 1/2	63.50	137.50	62.37	220.0	3.929	1.720	43.69
LHL 625D 07					.600	15.24		.120	3.05	3	76.20	135.00	61.24	180.0	3.214	2.045	51.94
LHL 625D 08					.600	15.24		.120	3.05	3 1/2	88.90	140.00	63.50	160.0	2.857	2.270	57.66
LHL 625D 09					.600	15.24		.120	3.05	4	101.60	135.00	61.24	135.0	2.411	2.645	67.18
LHL 625D 10					.600	15.24		.120	3.05	6	152.40	135.00	61.24	90.0	1.607	3.845	97.66
LHL 750D 01	3/4	19.05	3/8	9.52	.730	18.54	C	.148	3.76	1	25.40	287.50	130.41	1150.0	20.537	.750	19.05
LHL 750D 02					.730	18.54		.154	3.91	1 1/4	31.75	329.69	149.55	1055.0	18.840	.930	23.62
LHL 750D 03					.730	18.54		.154	3.91	1 1/2	38.10	309.38	140.33	825.0	14.733	1.105	28.07
LHL 750D 04					.730	18.54		.154	3.91	1 3/4	44.45	297.50	134.94	680.0	12.143	1.280	32.51
LHL 750D 05					.730	18.54		.154	3.91	2	50.80	292.50	132.68	585.0	10.447	1.430	36.32
LHL 750D 06					.730	18.54		.154	3.91	2 1/2	63.50	281.25	127.57	450.0	8.036	1.765	44.83
LHL 750D 07					.730	18.54		.156	3.96	3	76.20	292.50	132.68	390.0	6.965	2.125	53.98
LHL 750D 08					.730	18.54		.156	3.96	3 1/2	88.90	288.75	130.98	330.0	5.893	2.450	62.23
LHL 750D 09					.730	18.54		.156	3.96	4	101.60	285.00	129.28	285.0	5.090	2.790	70.87
LHL 750D 10					.730	18.54		.156	3.96	4 1/2	114.30	281.25	127.57	250.0	4.465	3.135	79.63
LHL 750D 11					.730	18.54		.156	3.96	5	127.00	275.00	124.74	220.0	3.929	3.515	89.28
LHL 750D 12					.730	18.54		.156	3.96	5 1/2	139.70	275.00	124.74	200.0	3.572	3.835	97.41
LHL 750D 13					.730	18.54		.156	3.96	6	152.40	270.00	122.47	180.0	3.214	4.225	107.32

SPECIAL INSTRUCTIONS FOR HEFTY SPRINGS

PRICING: See page 154 for pricing up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: *Nominal Inside Diameter = Nominal Outside Diameter minus 2 times the wire diameter.

TEMPERATURE RANGE: Music Wire (M) – Temperature Range of up to 200° F; Chrome Silicon (C) – Temperature Range of up to 400° F.

HEFTY SPRINGS: EXTRA HEAVY LOAD SERIES (COLOR CODE ORANGE)

ROUND WIRE • Music Wire (M) or Chrome Silicon (C) [Ideal Operating Range: 10% to 15% of Free Length]

LEE STOCK NUMBER	HOLE DIAMETER		ROD DIAMETER		NOMINAL* OUTSIDE DIAMETER		MATERIAL	WIRE DIAMETER		FREE LENGTH		LOAD AT 25% DEFLECTION		SPRING RATE		SOLID HEIGHT	
	IN.	MM	IN.	MM	IN.	MM		IN.	MM	IN.	MM	LB.	KG	LB/IN.	KG/MM	IN.	MM
LHL 1000D 01	1	25.40	1/2	12.70	.975	24.77	C	.197	5.00	1 1/2	38.10	480.00	217.73	1280.0	22.858	1.105	28.07
LHL 1000D 02					.975	24.77		.207	5.26	2	50.80	570.00	258.55	1140.0	20.358	1.475	37.47
LHL 1000D 03					.975	24.77		.207	5.26	2 1/2	63.50	537.50	243.81	860.0	15.358	1.825	46.36
LHL 1000D 04					.975	24.77		.207	5.26	3	76.20	525.00	238.14	700.0	12.501	2.145	54.48
LHL 1000D 05					.975	24.77		.207	5.26	3 1/2	88.90	511.88	232.18	585.0	10.447	2.485	63.12
LHL 1000D 06					.975	24.77		.207	5.26	4	101.60	505.00	229.07	505.0	9.018	2.815	71.50
LHL 1000D 07					.975	24.77		.207	5.26	4 1/2	114.30	495.00	224.53	440.0	7.858	3.165	80.39
LHL 1000D 08					.965	24.51		.207	5.26	5	127.00	493.75	223.96	395.0	7.054	3.480	88.39
LHL 1000D 09					.965	24.51		.207	5.26	6	152.40	480.00	217.73	320.0	5.715	4.200	106.68
LHL 1250D 01	1 1/4	31.75	5/8	15.88	1.205	30.61	C	.250	6.35	2	50.80	812.50	368.55	1625.0	29.019	1.495	37.97
LHL 1250D 02					1.205	30.61		.250	6.35	2 1/2	63.50	756.25	343.03	1210.0	21.608	1.840	46.74
LHL 1250D 03					1.220	30.99		.262	6.65	3	76.20	888.00	402.79	1184.0	21.144	2.235	56.77
LHL 1250D 04					1.210	30.73		.262	6.65	3 1/2	88.90	882.00	400.07	1008.0	18.001	2.600	66.04
LHL 1250D 05					1.220	30.99		.262	6.65	4	101.60	840.00	381.02	840.0	15.001	2.935	74.55
LHL 1250D 06					1.195	30.35		.262	6.65	4 1/2	114.30	882.00	400.07	784.0	14.001	3.320	84.33
LHL 1250D 07					1.205	30.61		.262	6.65	5	127.00	850.00	385.56	680.0	12.143	3.645	92.58
LHL 1250D 08					1.200	30.48		.262	6.65	6	152.40	840.00	381.02	560.0	10.000	4.375	111.13
LHL 1500D 01	1 1/2	38.10	3/4	19.05	1.465	37.21	C	.295	7.49	2	50.80	1102.50	500.09	2205.0	39.377	1.500	38.10
LHL 1500D 02					1.455	36.96		.306	7.77	2 1/2	63.50	1231.25	558.49	1970.0	35.180	1.870	47.50
LHL 1500D 03					1.450	36.83		.312	7.92	3	76.20	1293.75	586.84	1725.0	30.805	2.235	56.77
LHL 1500D 04					1.450	36.83		.312	7.92	3 1/2	88.90	1238.13	561.61	1415.0	25.269	2.590	65.79
LHL 1500D 05					1.465	37.21		.312	7.92	4	101.60	1200.00	544.32	1200.0	21.430	2.940	74.68
LHL 1500D 06					1.465	37.21		.312	7.92	4 1/2	114.30	1175.63	533.26	1045.0	18.662	3.285	83.44
LHL 1500D 07					1.465	37.21		.312	7.92	5	127.00	1150.00	521.64	920.0	16.429	3.650	92.71
LHL 1500D 08					1.465	37.21		.312	7.92	6	152.40	1125.00	510.30	750.0	13.394	4.330	109.98
LHL 2000D 01	2	50.80	1	25.40	1.940	49.28	C	.375	9.53	2 1/2	63.50	1562.50	708.74	2500.0	44.645	1.865	47.37
LHL 2000D 02					1.875	47.63		.375	9.53	3	76.20	1612.50	731.42	2150.0	38.395	2.225	56.52
LHL 2000D 03					1.960	49.78		.393	9.98	3 1/2	88.90	1706.25	773.95	1950.0	34.823	2.590	65.79
LHL 2000D 04					1.960	49.78		.393	9.98	4	101.60	1650.00	748.44	1650.0	29.466	2.915	74.04
LHL 2000D 05					1.960	49.78		.393	9.98	4 1/2	114.30	1603.12	727.17	1425.0	25.448	3.255	82.68
LHL 2000D 06					1.960	49.78		.393	9.98	5	127.00	1562.50	708.74	1250.0	22.322	3.600	91.44
LHL 2000D 07					1.960	49.78		.393	9.98	6	152.40	1522.50	690.60	1015.0	18.126	4.250	107.95

HEFTY SPRINGS



SPECIAL INSTRUCTIONS FOR HEFTY SPRINGS

PRICING: See page 154 for pricing up to 199. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: *Nominal Inside Diameter = Nominal Outside Diameter minus 2 times the wire diameter.
TEMPERATURE RANGE: Music Wire (M) – Temperature Range of up to 200° F; Chrome Silicon (C) – Temperature Range of up to 400° F.

HEFTY SPRINGS: PRICE SCHEDULE

MEDIUM LOAD: COLOR CODE GRAY

PART NO.	1 - 24	25 - 49	50 - 99	100 - 199	PART NO.	1 - 24	25 - 49	50 - 99	100 - 199
LHL 375A 01	1.48	1.27	1.06	0.92	LHL 1000A 01	4.35	3.38	2.80	2.24
LHL 375A 02	1.57	1.34	1.12	0.97	LHL 1000A 02	4.44	3.51	2.92	2.29
LHL 375A 03	1.79	1.46	1.30	1.13	LHL 1000A 03	4.59	3.65	3.05	2.39
LHL 375A 04	1.91	1.54	1.37	1.25	LHL 1000A 04	4.76	3.78	3.12	2.58
LHL 375A 05	2.03	1.73	1.49	1.36	LHL 1000A 05	4.88	3.89	3.29	2.69
LHL 375A 06	2.17	1.87	1.70	1.55	LHL 1000A 06	5.06	4.09	3.48	2.88
LHL 375A 07	2.46	2.06	1.89	1.67	LHL 1000A 07	5.08	4.12	3.56	2.97
LHL 375A 08	2.96	2.48	2.28	2.02	LHL 1000A 08	5.13	4.15	3.65	3.03
LHL 500A 01	1.79	1.40	1.25	1.00	LHL 1000A 09	5.37	4.44	3.79	3.22
LHL 500A 02	1.84	1.47	1.32	1.09	LHL 1000A 10	5.58	4.65	4.06	3.49
LHL 500A 03	1.94	1.69	1.43	1.25	LHL 1000A 11	5.97	4.99	4.36	3.70
LHL 500A 04	2.10	1.77	1.48	1.32	LHL 1000A 12	6.29	5.24	4.70	4.07
LHL 500A 05	2.28	1.92	1.70	1.45	LHL 1000A 13	6.75	5.73	5.08	4.42
LHL 500A 06	2.48	2.06	1.83	1.64	LHL 1250A 01	5.53	4.50	3.87	3.22
LHL 500A 07	2.63	2.30	2.02	1.80	LHL 1250A 02	5.73	4.65	4.00	3.33
LHL 500A 08	2.91	2.45	2.28	1.93	LHL 1250A 03	5.89	4.88	4.22	3.56
LHL 500A 09	4.04	3.43	3.12	2.76	LHL 1250A 04	6.19	5.14	4.50	3.80
LHL 500A 10	5.49	4.70	4.30	3.75	LHL 1250A 05	6.51	5.46	4.79	4.11
LHL 500A 11	5.69	4.91	4.48	3.89	LHL 1250A 06	6.92	5.82	5.13	4.42
LHL 500A 12	5.99	5.16	4.70	4.09	LHL 1250A 07	7.42	6.27	5.56	4.83
LHL 625A 01	2.13	1.69	1.43	1.25	LHL 1250A 08	7.94	6.71	6.07	5.29
LHL 625A 02	2.26	1.77	1.47	1.27	LHL 1250A 09	8.17	7.03	6.26	5.42
LHL 625A 03	2.34	1.84	1.66	1.36	LHL 1250A 10	8.42	7.27	6.62	5.90
LHL 625A 04	2.63	2.03	1.73	1.55	LHL 1250A 11	9.03	7.82	7.18	6.49
LHL 625A 05	2.80	2.16	1.93	1.67	LHL 1500A 01	6.58	5.25	4.53	3.80
LHL 625A 06	2.86	2.35	2.07	1.76	LHL 1500A 02	6.99	5.76	4.93	4.19
LHL 625A 07	3.15	2.47	2.28	1.98	LHL 1500A 03	7.55	6.28	5.47	4.69
LHL 625A 08	3.30	2.75	2.42	2.19	LHL 1500A 04	8.24	6.90	6.07	5.27
LHL 625A 09	3.42	2.99	2.66	2.33	LHL 1500A 05	8.96	7.55	6.78	5.92
LHL 625A 10	3.95	3.42	3.07	2.69	LHL 1500A 06	9.73	8.29	7.42	6.61
LHL 750A 01	3.34	2.68	2.15	1.74	LHL 1500A 07	10.12	8.36	7.56	6.76
LHL 750A 02	3.40	2.75	2.28	1.85	LHL 1500A 08	10.52	9.06	8.23	7.44
LHL 750A 03	3.56	2.85	2.40	1.93	LHL 1500A 09	11.27	9.83	9.01	7.96
LHL 750A 04	3.74	3.06	2.57	2.08	LHL 2000A 01	11.17	9.53	8.53	7.63
LHL 750A 05	3.75	3.10	2.64	2.17	LHL 2000A 02	11.93	10.22	9.26	8.29
LHL 750A 06	3.76	3.12	2.70	2.20	LHL 2000A 03	12.77	11.01	10.03	9.04
LHL 750A 07	3.99	3.30	2.83	2.40	LHL 2000A 04	13.71	11.91	10.90	9.87
LHL 750A 08	4.22	3.51	3.06	2.59	LHL 2000A 05	14.76	12.89	11.89	10.80
LHL 750A 09	4.39	3.72	3.26	2.76	LHL 2000A 06	15.98	14.04	12.98	11.83
LHL 750A 10	4.68	3.93	3.48	2.98	LHL 2000A 07	17.38	15.29	14.18	13.04
LHL 750A 11	4.91	4.12	3.68	3.20	LHL 2000A 08	18.84	16.78	15.68	14.39
LHL 750A 12	5.30	4.44	3.99	3.53					
LHL 750A 13	5.54	4.76	4.32	3.82					

MEDIUM LOAD PLUS: COLOR CODE BEIGE

PART NO.	1 - 24	25 - 49	50 - 99	100 - 199	PART NO.	1 - 24	25 - 49	50 - 99	100 - 199
LHL 375AB 01	1.54	1.31	1.10	0.96	LHL 500AB 03	2.02	1.73	1.46	1.27
LHL 375AB 02	1.62	1.35	1.20	1.00	LHL 500AB 04	2.15	1.81	1.58	1.34
LHL 375AB 03	1.84	1.48	1.31	1.15	LHL 500AB 05	2.31	1.98	1.73	1.52
LHL 375AB 04	1.91	1.62	1.43	1.26	LHL 500AB 06	2.50	2.12	1.89	1.66
LHL 375AB 05	2.09	1.77	1.58	1.37	LHL 500AB 07	2.64	2.31	2.09	1.85
LHL 375AB 06	2.26	1.91	1.73	1.57	LHL 500AB 08	2.92	2.48	2.31	2.03
LHL 375AB 07	2.49	2.12	1.92	1.71	LHL 500AB 09	3.34	2.84	2.59	2.33
LHL 375AB 08	2.97	2.56	2.31	2.05	LHL 625AB 01	2.18	1.74	1.48	1.27
LHL 500AB 01	1.84	1.45	1.30	1.05	LHL 625AB 02	2.30	1.85	1.57	1.33
LHL 500AB 02	1.90	1.56	1.36	1.15	LHL 625AB 03	2.45	1.94	1.70	1.48

PRICES EFFECTIVE JANUARY 2011 • TERMS NET 30 DAYS

Unit Prices Shown / Minimum Order: \$40.00 / Free Ground Shipping within Continental United States

MEDIUM LOAD PLUS: COLOR CODE BEIGE (CONTINUED)

PART NO.	1 - 24	25 - 49	50 - 99	100 - 199
LHL 625AB 04	2.64	2.11	1.81	1.59
LHL 625AB 05	2.86	2.26	1.99	1.73
LHL 625AB 06	2.92	2.39	2.12	1.84
LHL 625AB 07	3.18	2.59	2.31	2.03
LHL 625AB 08	3.34	2.81	2.51	2.24
LHL 625AB 09	3.45	3.05	2.70	2.35
LHL 625AB 10	4.15	3.58	3.26	2.87
LHL 750AB 01	3.42	2.74	2.26	1.81
LHL 750AB 02	3.53	2.83	2.34	1.90
LHL 750AB 03	3.58	2.96	2.50	2.03
LHL 750AB 04	3.85	3.12	2.65	2.16
LHL 750AB 05	3.92	3.22	2.73	2.26
LHL 750AB 06	4.04	3.34	2.87	2.35
LHL 750AB 07	4.26	3.52	3.05	2.59
LHL 750AB 08	4.48	3.73	3.29	2.78
LHL 750AB 09	4.65	3.90	3.45	2.91
LHL 750AB 10	4.85	4.09	3.61	3.16
LHL 750AB 11	5.13	4.34	3.90	3.40
LHL 750AB 12	5.52	4.69	4.19	3.74
LHL 750AB 13	5.85	5.03	4.54	4.00
LHL 1000AB 01	4.44	3.52	2.92	2.29
LHL 1000AB 02	4.56	3.60	3.03	2.40
LHL 1000AB 03	4.73	3.74	3.13	2.52
LHL 1000AB 04	4.92	3.93	3.28	2.72
LHL 1000AB 05	5.06	4.07	3.49	2.86
LHL 1000AB 06	5.20	4.24	3.61	2.94
LHL 1000AB 07	5.26	4.27	3.69	3.11
LHL 1000AB 08	5.46	4.44	3.91	3.30
LHL 1000AB 09	5.72	4.72	4.11	3.53
LHL 1000AB 10	6.03	5.04	4.39	3.85
LHL 1000AB 11	6.42	5.53	4.76	4.11

PART NO.	1 - 24	25 - 49	50 - 99	100 - 199
LHL 1000AB 12	6.82	5.76	5.17	4.51
LHL 1000AB 13	7.32	6.24	5.62	4.93
LHL 1250AB 01	5.67	4.58	3.96	3.32
LHL 1250AB 02	5.85	4.71	4.10	3.42
LHL 1250AB 03	6.03	4.96	4.32	3.64
LHL 1250AB 04	6.29	5.19	4.56	3.88
LHL 1250AB 05	6.65	5.54	4.88	4.21
LHL 1250AB 06	7.04	5.92	5.26	4.55
LHL 1250AB 07	7.53	6.36	5.71	4.95
LHL 1250AB 08	8.13	6.92	6.24	5.47
LHL 1250AB 09	8.57	7.42	6.64	5.88
LHL 1250AB 10	8.90	7.57	6.91	6.17
LHL 1250AB 11	9.44	8.24	7.58	6.82
LHL 1500AB 01	7.28	5.92	5.14	4.36
LHL 1500AB 02	7.77	6.44	5.63	4.90
LHL 1500AB 03	8.66	7.27	6.43	5.62
LHL 1500AB 04	9.39	7.98	7.13	6.28
LHL 1500AB 05	9.91	8.40	7.53	6.68
LHL 1500AB 06	10.90	9.12	8.24	7.39
LHL 1500AB 07	11.18	9.54	8.74	7.88
LHL 1500AB 08	11.99	10.37	9.47	8.64
LHL 1500AB 09	12.74	11.16	10.33	9.31
LHL 2000AB 01	11.73	10.06	9.09	8.11
LHL 2000AB 02	12.54	10.82	9.85	8.83
LHL 2000AB 03	13.46	11.63	10.97	9.63
LHL 2000AB 04	14.44	12.57	11.55	10.47
LHL 2000AB 05	15.54	13.61	12.58	11.48
LHL 2000AB 06	16.84	14.85	13.71	12.55
LHL 2000AB 07	18.17	16.09	14.99	13.78
LHL 2000AB 08	19.75	17.61	16.51	15.18

MEDIUM HEAVY LOAD: COLOR CODE PURPLE

PART NO.	1 - 24	25 - 49	50 - 99	100 - 199
LHL 375B 01	1.56	1.32	1.07	0.98
LHL 375B 02	1.65	1.37	1.21	1.05
LHL 375B 03	1.85	1.48	1.28	1.19
LHL 375B 04	1.91	1.69	1.41	1.27
LHL 375B 05	2.11	1.78	1.61	1.37
LHL 375B 06	2.26	1.92	1.67	1.59
LHL 375B 07	2.49	2.14	1.87	1.74
LHL 375B 08	2.97	2.59	2.28	2.11
LHL 500B 01	1.85	1.48	1.28	1.09
LHL 500B 02	1.91	1.65	1.33	1.21
LHL 500B 03	2.11	1.74	1.41	1.31
LHL 500B 04	2.18	1.85	1.61	1.37
LHL 500B 05	2.34	2.02	1.68	1.59
LHL 500B 06	2.50	2.14	1.87	1.67
LHL 500B 07	2.66	2.35	2.04	1.90
LHL 500B 08	2.93	2.49	2.26	2.08
LHL 500B 09	3.38	2.88	2.58	2.39
LHL 625B 01	2.28	1.78	1.47	1.31
LHL 625B 02	2.34	1.92	1.61	1.37
LHL 625B 03	2.50	2.03	1.68	1.55
LHL 625B 04	2.66	2.14	1.83	1.64

PART NO.	1 - 24	25 - 49	50 - 99	100 - 199
LHL 625B 05	2.86	2.31	1.96	1.76
LHL 625B 06	2.96	2.46	2.09	1.91
LHL 625B 07	3.22	2.68	2.26	2.08
LHL 625B 08	3.35	2.86	2.55	2.28
LHL 625B 09	3.45	3.08	2.63	2.39
LHL 625B 10	4.34	3.74	3.32	2.99
LHL 750B 01	3.53	2.78	2.26	1.90
LHL 750B 02	3.58	2.91	2.33	1.98
LHL 750B 03	3.60	3.06	2.51	2.08
LHL 750B 04	3.92	3.15	2.63	2.24
LHL 750B 05	4.07	3.34	2.75	2.33
LHL 750B 06	4.30	3.55	2.96	2.56
LHL 750B 07	4.50	3.69	3.16	2.78
LHL 750B 08	4.76	3.97	3.42	2.96
LHL 750B 09	4.91	4.09	3.53	2.99
LHL 750B 10	5.00	4.25	3.63	3.30
LHL 750B 11	5.32	4.58	3.95	3.58
LHL 750B 12	5.73	4.92	4.25	3.89
LHL 750B 13	6.10	5.25	4.60	4.24
LHL 1000B 01	4.54	3.58	2.96	2.34
LHL 1000B 02	4.68	3.69	2.98	2.51

PRICES EFFECTIVE JANUARY 2011 • TERMS NET 30 DAYS

Unit Prices Shown / Minimum Order: \$40.00 / Free Ground Shipping within Continental United States

HEFTY SPRINGS: PRICE SCHEDULE

MEDIUM HEAVY LOAD: COLOR CODE PURPLE (CONTINUED)

PART NO.	1 - 24	25 - 49	50 - 99	100 - 199	PART NO.	1 - 24	25 - 49	50 - 99	100 - 199
LHL 1000B 03	4.84	3.87	3.16	2.63	LHL 1250B 10	9.40	7.82	6.95	6.47
LHL 1000B 04	5.06	4.04	3.32	2.86	LHL 1250B 11	9.83	8.63	7.72	7.18
LHL 1000B 05	5.27	4.24	3.53	2.97	LHL 1500B 01	7.91	6.54	5.56	4.95
LHL 1000B 06	5.36	4.34	3.62	2.99	LHL 1500B 02	8.50	7.10	6.13	5.62
LHL 1000B 07	5.38	4.44	3.73	3.22	LHL 1500B 03	9.70	8.26	7.20	6.55
LHL 1000B 08	5.73	4.70	4.00	3.53	LHL 1500B 04	10.54	9.07	7.93	7.27
LHL 1000B 09	6.05	5.04	4.30	3.84	LHL 1500B 05	10.83	9.30	8.02	7.44
LHL 1000B 10	6.42	5.40	4.60	4.20	LHL 1500B 06	12.13	9.91	8.81	8.19
LHL 1000B 11	6.86	6.06	5.00	4.53	LHL 1500B 07	12.25	10.73	9.63	9.04
LHL 1000B 12	7.35	6.28	5.46	4.94	LHL 1500B 08	13.50	11.61	10.42	9.81
LHL 1000B 13	7.91	6.71	5.97	5.46	LHL 1500B 09	14.16	12.47	11.27	10.61
LHL 1250B 01	5.77	4.66	3.94	3.38	LHL 2000B 01	12.30	10.58	9.37	8.58
LHL 1250B 02	5.90	4.80	4.06	3.53	LHL 2000B 02	13.12	11.39	10.07	9.39
LHL 1250B 03	6.10	5.04	4.25	3.69	LHL 2000B 03	14.10	12.27	11.60	10.20
LHL 1250B 04	6.35	5.26	4.48	3.96	LHL 2000B 04	15.13	13.23	11.83	11.08
LHL 1250B 05	6.75	5.63	4.79	4.25	LHL 2000B 05	16.29	14.30	12.85	12.12
LHL 1250B 06	7.15	6.00	5.20	4.69	LHL 2000B 06	17.68	15.66	14.01	13.26
LHL 1250B 07	7.69	6.50	5.65	5.11	LHL 2000B 07	19.01	16.88	15.34	14.50
LHL 1250B 08	8.30	7.10	6.19	5.62	LHL 2000B 08	20.67	18.38	16.78	15.98
LHL 1250B 09	8.95	7.74	6.81	6.31					

HEAVY LOAD: COLOR CODE BLACK

PART NO.	1 - 24	25 - 49	50 - 99	100 - 199	PART NO.	1 - 24	25 - 49	50 - 99	100 - 199
LHL 375C 01	1.80	1.47	1.30	1.05	LHL 750C 06	4.54	3.79	3.28	2.83
LHL 375C 02	1.91	1.54	1.35	1.09	LHL 750C 07	4.84	4.04	3.57	2.99
LHL 375C 03	1.98	1.69	1.44	1.27	LHL 750C 08	5.00	4.09	3.64	3.12
LHL 375C 04	2.15	1.78	1.66	1.36	LHL 750C 09	5.30	4.44	3.99	3.53
LHL 375C 05	2.28	2.00	1.74	1.59	LHL 750C 10	5.76	4.96	4.39	3.89
LHL 375C 06	2.30	2.11	1.90	1.67	LHL 750C 11	6.20	5.40	4.91	4.34
LHL 375C 07	2.64	2.31	2.08	1.88	LHL 750C 12	6.75	5.83	5.34	4.83
LHL 375C 08	3.28	2.86	2.54	2.34	LHL 750C 13	7.43	6.49	5.95	5.39
LHL 500C 01	2.14	1.74	1.44	1.27	LHL 1000C 01	4.86	3.87	3.27	2.70
LHL 500C 02	2.16	1.78	1.49	1.31	LHL 1000C 02	5.02	4.04	3.42	2.80
LHL 500C 03	2.28	1.94	1.70	1.37	LHL 1000C 03	5.19	4.17	3.53	2.94
LHL 500C 04	2.49	2.03	1.74	1.59	LHL 1000C 04	5.36	4.44	3.74	3.12
LHL 500C 05	2.60	2.17	1.95	1.67	LHL 1000C 05	5.45	4.49	3.96	3.32
LHL 500C 06	2.81	2.35	2.11	1.88	LHL 1000C 06	5.52	4.57	3.99	3.56
LHL 500C 07	3.05	2.56	2.30	2.02	LHL 1000C 07	5.85	4.85	4.26	3.64
LHL 500C 08	3.23	2.76	2.47	2.20	LHL 1000C 08	6.17	5.15	4.55	3.90
LHL 500C 09	4.02	3.42	3.07	2.74	LHL 1000C 09	6.59	5.47	4.91	4.27
LHL 625C 01	2.49	2.00	1.70	1.37	LHL 1000C 10	6.96	5.85	5.31	4.67
LHL 625C 02	2.53	2.06	1.74	1.59	LHL 1000C 11	7.44	6.32	5.70	4.99
LHL 625C 03	2.64	2.17	1.95	1.64	LHL 1000C 12	7.98	6.82	6.17	5.47
LHL 625C 04	2.86	2.31	2.02	1.71	LHL 1000C 13	8.50	7.33	6.71	6.03
LHL 625C 05	2.97	2.46	2.26	1.90	LHL 1250C 01	5.94	4.90	4.23	3.57
LHL 625C 06	3.16	2.66	2.33	2.03	LHL 1250C 02	6.14	5.14	4.39	3.70
LHL 625C 07	3.34	2.86	2.50	2.20	LHL 1250C 03	6.35	5.30	4.62	3.98
LHL 625C 08	3.85	3.06	2.71	2.39	LHL 1250C 04	6.77	5.69	4.99	4.30
LHL 625C 09	3.95	3.20	2.96	2.63	LHL 1250C 05	7.16	6.07	5.37	4.70
LHL 625C 10	5.08	4.11	3.80	3.39	LHL 1250C 06	7.79	6.58	5.94	5.20
LHL 750C 01	3.74	3.04	2.50	2.04	LHL 1250C 07	8.43	7.20	6.58	5.73
LHL 750C 02	3.87	3.12	2.64	2.19	LHL 1250C 08	9.17	7.93	7.18	6.77
LHL 750C 03	3.93	3.19	2.73	2.24	LHL 1250C 09	10.06	8.71	7.98	7.14
LHL 750C 04	4.10	3.37	2.91	2.39	LHL 1250C 10	10.52	8.77	8.15	7.33
LHL 750C 05	4.30	3.58	3.07	2.58	LHL 1250C 11	11.05	9.67	9.06	8.08

PRICES EFFECTIVE JANUARY 2011 • TERMS NET 30 DAYS

Unit Prices Shown / Minimum Order: \$40.00 / Free Ground Shipping within Continental United States

HEAVY LOAD: COLOR CODE BLACK (CONTINUED)

PART NO.	1 - 24	25 - 49	50 - 99	100 - 199	PART NO.	1 - 24	25 - 49	50 - 99	100 - 199
LHL 1500C 01	8.65	7.68	6.38	5.62	LHL 2000C 01	13.41	11.50	10.51	9.39
LHL 1500C 02	9.46	8.00	7.18	6.33	LHL 2000C 02	14.32	12.35	11.30	10.20
LHL 1500C 03	10.38	8.89	8.08	7.15	LHL 2000C 03	15.30	13.35	12.22	11.08
LHL 1500C 04	10.58	9.08	8.27	7.43	LHL 2000C 04	16.37	14.35	13.24	12.03
LHL 1500C 05	11.50	9.98	9.13	8.31	LHL 2000C 05	17.54	15.48	14.36	13.12
LHL 1500C 06	12.54	10.91	10.11	9.10	LHL 2000C 06	18.92	16.73	15.59	14.28
LHL 1500C 07	13.53	11.91	11.05	10.12	LHL 2000C 07	20.46	18.15	16.95	15.64
LHL 1500C 08	14.59	12.89	12.03	11.05	LHL 2000C 08	22.12	19.76	18.56	17.16
LHL 1500C 09	15.66	13.92	12.98	11.96					

EXTRA HEAVY LOAD: COLOR CODE ORANGE

PART NO.	1 - 24	25 - 49	50 - 99	100 - 199	PART NO.	1 - 24	25 - 49	50 - 99	100 - 199
LHL 375D 01	2.05	1.60	1.45	1.26	LHL 750D 10	6.97	5.69	5.13	4.57
LHL 375D 02	2.09	1.78	1.50	1.34	LHL 750D 11	7.31	6.32	5.80	5.24
LHL 375D 03	2.26	1.87	1.76	1.45	LHL 750D 12	8.15	7.04	6.54	5.96
LHL 375D 04	2.39	2.02	1.79	1.52	LHL 750D 13	8.39	7.33	6.76	6.27
LHL 375D 05	2.60	2.15	1.96	1.70	LHL 1000D 01	6.10	5.03	4.38	3.76
LHL 375D 06	2.74	2.39	2.12	1.84	LHL 1000D 02	6.39	5.32	4.70	4.07
LHL 375D 07	2.99	2.53	2.37	2.03	LHL 1000D 03	6.76	5.71	5.07	4.39
LHL 375D 08	3.67	3.09	2.86	2.48	LHL 1000D 04	7.19	6.10	5.46	4.73
LHL 500D 01	2.35	1.94	1.76	1.45	LHL 1000D 05	7.77	6.64	5.92	5.19
LHL 500D 02	2.43	2.12	1.80	1.46	LHL 1000D 06	8.36	7.12	6.88	5.73
LHL 500D 03	2.60	2.15	1.92	1.67	LHL 1000D 07	8.94	7.75	7.12	6.32
LHL 500D 04	2.74	2.28	2.05	1.76	LHL 1000D 08	9.52	8.38	7.73	6.82
LHL 500D 05	2.95	2.50	2.20	1.96	LHL 1000D 09	9.68	8.63	7.93	7.20
LHL 500D 06	3.07	2.60	2.39	2.08	LHL 1250D 01	7.93	6.75	5.99	5.24
LHL 500D 07	3.31	2.87	2.56	2.29	LHL 1250D 02	8.65	7.45	6.63	5.86
LHL 500D 08	3.53	3.05	2.81	2.45	LHL 1250D 03	9.46	8.47	7.42	6.64
LHL 500D 09	4.34	3.76	3.45	3.05	LHL 1250D 04	10.37	9.07	8.19	7.42
LHL 625D 01	2.76	2.28	1.98	1.70	LHL 1250D 05	11.29	10.00	9.13	8.23
LHL 625D 02	2.84	2.45	2.11	1.76	LHL 1250D 06	11.48	10.14	9.35	8.57
LHL 625D 03	3.05	2.53	2.20	1.83	LHL 1250D 07	12.52	11.25	10.44	9.39
LHL 625D 04	3.20	2.60	2.39	1.99	LHL 1250D 08	14.84	13.48	12.62	11.63
LHL 625D 05	3.38	2.87	2.48	2.14	LHL 1500D 01	10.69	9.35	8.47	7.58
LHL 625D 06	3.52	2.99	2.63	2.34	LHL 1500D 02	11.89	10.47	9.56	8.58
LHL 625D 07	3.70	3.20	2.86	2.47	LHL 1500D 03	12.99	11.63	10.67	9.59
LHL 625D 08	3.95	3.31	3.11	2.71	LHL 1500D 04	14.28	12.76	11.84	10.82
LHL 625D 09	4.19	3.64	3.27	2.98	LHL 1500D 05	15.57	14.06	13.10	11.93
LHL 625D 10	5.36	4.34	4.03	3.57	LHL 1500D 06	16.91	15.32	14.31	13.16
LHL 750D 01	4.19	3.31	2.86	2.38	LHL 1500D 07	18.45	16.73	15.74	14.49
LHL 750D 02	4.32	3.47	2.94	2.45	LHL 1500D 08	21.55	19.72	18.68	17.29
LHL 750D 03	4.48	3.55	3.07	2.60	LHL 2000D 01	18.59	16.30	15.15	13.82
LHL 750D 04	4.62	3.76	3.24	2.71	LHL 2000D 02	19.49	17.55	16.36	14.97
LHL 750D 05	4.86	3.93	3.40	2.92	LHL 2000D 03	20.89	18.90	17.67	16.26
LHL 750D 06	5.06	4.24	3.70	3.12	LHL 2000D 04	22.42	20.31	19.04	17.61
LHL 750D 07	5.19	4.45	3.89	3.19	LHL 2000D 05	24.01	21.88	20.56	19.10
LHL 750D 08	5.26	4.67	4.12	3.57	LHL 2000D 06	25.84	23.53	22.24	20.64
LHL 750D 09	5.98	5.04	4.57	4.07	LHL 2000D 07	29.60	27.16	25.84	24.03

PRICES EFFECTIVE JANUARY 2011 • TERMS NET 30 DAYS

Unit Prices Shown / Minimum Order: \$40.00 / Free Ground Shipping within Continental United States

Prices Shown are Per Spring Per Quantity. Quantities Cannot Be Combined to Lower Item Pricing.

Small Order Shipping & Processing Charge:

HEFTY Die Spring orders under \$40.00 will incur an additional \$20.00 Shipping & Processing Charge per order.



With over 19,000 stock springs, extensive custom capabilities and over 90 years of expertise, Lee Spring continues to respond to yesterday's needs, today's demands and tomorrow's technology. We lead the industry with innovative products like LeeP™ Plastic

Composite Springs, BANTAM™ Mini Springs and Lite Pressure™ Springs.

Whether you need 10 springs or 10 million springs, our World-Class Service and comprehensive website make finding the right spring easy. Call or email us today to learn more.



Lee Spring®

leespring.com

*Not just a better spring,
a better spring company.*

EXTENSION SPRINGS: INSTRUMENT SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless
EI 007A 01	.063	1.60	.007	.18	.32	.145	.030	.014	0.250	6.35	1.000	.018	0.540	13.72	T	T
EI 007A 02									0.313	7.95	0.690	.012	0.733	18.62	T	T
EI 007A 03									0.375	9.53	0.530	.009	0.925	23.50	T	T
EI 007A 04									0.438	11.13	0.430	.008	1.108	28.14	T	T
EI 007A 05									0.500	12.70	0.360	.006	1.310	33.27	T	T
SEE NOTE ON PAGE 3 UNDER PLATING																
EI 008A 01	.063	1.60	.008	.20	.45	.204	.040	.018	0.250	6.35	2.000	.036	0.460	11.68	T	T
EI 008A 02									0.313	7.95	1.400	.025	0.603	15.32	T	T
EI 008A 03									0.375	9.53	1.100	.020	0.745	18.92	T	T
EI 008A 04									0.438	11.13	0.880	.016	0.908	23.06	T	T
EI 008A 05									0.500	12.70	0.740	.013	1.050	26.67	T	T
EI 008A 06	.063	1.60	.008	.20	.45	.204	.040	.018	0.625	15.88	0.570	.010	1.345	34.16	T	T
EI 008A 07									0.750	19.05	0.460	.008	1.640	41.66	T	T
EI 008A 08									0.875	22.23	0.380	.007	1.955	49.66	T	T
SEE NOTE ON PAGE 3 UNDER PLATING																
EI 009A 01	.063	1.60	.009	.23	.62	.281	.060	.027	0.250	6.35	3.700	.066	0.400	10.16	T	T
EI 009A 02									0.313	7.95	2.700	.048	0.523	13.28	T	T
EI 009A 03									0.375	9.53	2.100	.037	0.645	16.38	T	T
EI 009A 04									0.438	11.13	1.700	.030	0.768	19.51	T	T
EI 009A 05									0.500	12.70	1.400	.025	0.900	22.86	T	T
EI 009A 06	.063	1.60	.009	.23	.62	.281	.060	.027	0.625	15.88	1.100	.020	1.135	28.83	T	T
EI 009A 07									0.750	19.05	0.860	.015	1.400	35.56	T	T
EI 009A 08									0.875	22.23	0.720	.013	1.655	42.04	T	T
SEE NOTE ON PAGE 3 UNDER PLATING																
EI 011A 01	.063	1.60	.011	.28	1.14	.517	.100	.045	0.250	6.35	11.100	.198	0.344	8.74	T	U
EI 011A 02									0.313	7.95	7.900	.141	0.445	11.30	T	U
EI 011A 03									0.375	9.53	5.900	.105	0.551	14.00	T	U
EI 011A 04									0.438	11.13	4.800	.086	0.655	16.64	T	U
EI 011A 05									0.500	12.70	4.100	.073	0.754	19.15	T	U
EI 011A 06	.063	1.60	.011	.28	1.14	.517	.100	.045	0.625	15.88	3.200	.057	0.950	24.13	T	U
EI 011A 07									0.750	19.05	2.500	.045	1.166	29.62	T	U
SEE NOTE ON PAGE 3 UNDER PLATING																
EI 007AA 01	.078	1.98	.007	.18	.26	.117	.025	.011	0.250	6.35	0.611	.011	0.630	16.00	L	L
EI 007AA 02									0.313	7.95	0.394	.007	0.902	22.91	L	L
EI 007AA 03									0.375	9.53	0.292	.005	1.169	29.69	L	L
EI 007AA 04									0.438	11.13	0.231	.004	1.441	36.60	L	L
EI 007AA 05									0.500	12.70	0.192	.003	1.709	43.41	L	L
SEE NOTE ON PAGE 3 UNDER PLATING																
EI 008AA 01	.078	1.98	.008	.20	.39	.175	.035	.016	0.250	6.35	1.210	.022	0.540	13.72	L	L
EI 008AA 02									0.313	7.95	0.789	.014	0.759	19.28	L	L
EI 008AA 03									0.375	9.53	0.587	.010	0.973	24.71	L	L
EI 008AA 04									0.438	11.13	0.466	.008	1.192	30.28	L	L
EI 008AA 05									0.500	12.70	0.388	.007	1.407	35.74	L	L
EI 008AA 06	.078	1.98	.008	.20	.39	.175	.035	.016	0.625	15.88	0.289	.005	1.840	46.74	L	L
EI 008AA 07									0.750	19.05	0.231	.004	2.273	57.73	L	L
EI 008AA 08									0.875	22.23	0.192	.003	2.706	68.73	L	L

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: INSTRUMENT SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP							
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*						
EI 009AA 01	.078	1.98	.009	.23	.56	.252	.050	.023	0.250	6.35	2.221	.040	0.477	12.12	L	L						
EI 009AA 02									0.313	7.95	1.459	.026	0.659	16.74	L	L						
EI 009AA 03									0.375	9.53	1.091	.019	0.838	21.29	L	L						
EI 009AA 04									0.438	11.13	0.869	.016	1.020	25.91	L	L						
EI 009AA 05									0.500	12.70	0.723	.013	1.198	30.43	L	L						
EI 009AA 06									0.625	15.88	0.541	.010	1.559	39.60	L	L						
EI 009AA 07									SEE NOTE ON PAGE 3 UNDER PLATING						0.750	19.05	0.432	.008	1.919	48.74	L	L
EI 009AA 08									0.875	22.23	0.360	.006	2.280	57.91	L	L						
EI 011AA 01	.078	1.98	.011	.28	1.03	.467	.090	.041	0.250	6.35	6.302	.113	0.399	10.13	L	L						
EI 011AA 02									0.313	7.95	4.209	.075	0.536	13.61	L	L						
EI 011AA 03									0.375	9.53	3.173	.057	0.671	17.04	L	L						
EI 011AA 04									0.438	11.13	2.538	.045	0.808	20.52	L	L						
EI 011AA 05									0.500	12.70	2.120	.038	0.943	23.95	L	L						
EI 011AA 06									0.625	15.88	1.592	.028	1.216	30.89	L	L						
EI 011AA 07									0.750	19.05	1.274	.023	1.488	37.80	L	L						
EI 011AA 08									SEE NOTE ON PAGE 3 UNDER PLATING						0.875	22.23	1.062	.019	1.760	44.70	L	L
EI 010B 01	.094	2.39	.010	.25	.60	.272	.050	.023	0.375	9.53	1.200	.021	0.835	21.21	L	L						
EI 010B 02									0.438	11.13	0.940	.017	1.028	26.11	L	L						
EI 010B 03									0.500	12.70	0.760	.014	1.220	30.99	L	L						
EI 010B 04									0.625	15.88	0.560	.010	1.605	40.77	L	L						
EI 010B 05									0.750	19.05	0.440	.008	2.000	50.80	L	L						
EI 010B 06									0.875	22.23	0.360	.006	2.405	61.09	L	L						
EI 010B 07									SEE NOTE ON PAGE 3 UNDER PLATING						1.000	25.40	0.310	.006	2.770	70.36	L	L
EI 011B 01									.094	2.39	.011	.28	.80	.362	.070	.032	0.375	9.53	2.000	.036	0.745	18.92
EI 011B 02	0.438	11.13	1.530	.027	0.918	23.32	L	L														
EI 011B 03	0.500	12.70	1.260	.022	1.080	27.43	L	L														
EI 011B 04	0.625	15.88	0.930	.016	1.405	35.69	L	L														
EI 011B 05	0.750	19.05	0.730	.013	1.750	44.45	L	L														
EI 011B 06	0.875	22.23	0.600	.011	2.095	53.21	L	L														
EI 011B 07	SEE NOTE ON PAGE 3 UNDER PLATING						1.000	25.40									0.517	.009	2.400	60.96	L	L
EI 012B 01	.094	2.39	.012	.30	1.00	.453	.100	.045									0.375	9.53	3.200	.057	0.655	16.64
EI 012B 02									0.438	11.13	2.400	.043	0.818	20.78	L	L						
EI 012B 03									0.500	12.70	2.000	.036	0.950	24.13	L	L						
EI 012B 04									0.625	15.88	1.500	.027	1.225	31.12	L	L						
EI 012B 05									0.750	19.05	1.200	.021	1.500	38.10	L	L						
EI 012B 06									0.875	22.23	0.960	.017	1.815	46.10	L	L						
EI 012B 07									SEE NOTE ON PAGE 3 UNDER PLATING						1.000	25.40	0.820	.015	2.100	53.34	L	L

SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: INSTRUMENT SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless
EI 013B 01	.094	2.39	.013	.33	1.25	.566	.130	.059	0.375	9.53	4.800	.086	0.605	15.37	L	L
EI 013B 02									0.438	11.13	3.700	.066	0.738	18.75	L	L
EI 013B 03									0.500	12.70	3.100	.055	0.860	21.84	L	L
EI 013B 04									0.625	15.88	2.260	.040	1.125	28.58	L	L
EI 013B 05									0.750	19.05	1.800	.032	1.370	34.80	L	L
EI 013B 06									0.875	22.23	1.500	.027	1.625	41.28	L	L
EI 013B 07									SEE NOTE ON PAGE 3 UNDER PLATING						1.000	25.40
EI 014B 01	.094	2.39	.014	.36	1.50	.679	.170	.077	0.375	9.53	7.100	.127	0.565	14.35	L	L
EI 014B 02									0.438	11.13	5.500	.098	0.678	17.22	L	L
EI 014B 03									0.500	12.70	4.600	.082	0.790	20.07	L	L
EI 014B 04									0.625	15.88	3.400	.061	1.015	25.78	L	L
EI 014B 05									0.750	19.05	2.700	.048	1.240	31.50	L	L
EI 014B 06									0.875	22.23	2.200	.039	1.475	37.47	L	L
EI 014B 07									SEE NOTE ON PAGE 3 UNDER PLATING						1.000	25.40
EI 016B 01	.094	2.39	.016	.41	2.26	1.025	.190	.086	0.375	9.53	14.200	.254	0.574	14.57	L	L
EI 016B 02									0.438	11.13	11.000	.196	0.626	15.90	L	L
EI 016B 03									0.500	12.70	9.200	.164	0.725	18.42	L	L
EI 016B 04									0.625	15.88	6.800	.121	0.929	23.60	L	L
EI 016B 05									0.750	19.05	5.300	.095	1.141	28.98	L	L
EI 016B 06									0.875	22.23	4.400	.079	1.345	34.16	L	L
EI 016B 07									SEE NOTE ON PAGE 3 UNDER PLATING						1.000	25.40
EI 010C 01	.109	2.77	.010	.25	.53	.238	.050	.023	0.375	9.53	0.821	.015	0.955	24.26	L	L
EI 010C 02									0.438	11.13	0.613	.011	1.214	30.84	L	L
EI 010C 03									0.500	12.70	0.491	.009	1.468	37.29	L	L
EI 010C 04									0.625	15.88	0.350	.006	1.982	50.34	L	L
EI 010C 05									0.750	19.05	0.272	.005	2.496	63.40	L	L
EI 010C 06									0.875	22.23	0.223	.004	3.010	76.45	L	L
EI 010C 07									SEE NOTE ON PAGE 3 UNDER PLATING						1.000	25.40
EI 011C 01	.109	2.77	.011	.28	.70	.319	.065	.029	0.375	9.53	1.341	.024	0.851	21.62	L	L
EI 011C 02									0.438	11.13	1.006	.018	1.072	27.23	L	L
EI 011C 03									0.500	12.70	0.807	.014	1.290	32.77	L	L
EI 011C 04									0.625	15.88	0.578	.010	1.729	43.92	L	L
EI 011C 05									0.750	19.05	0.450	.008	2.169	55.09	L	L
EI 011C 06									0.875	22.23	0.368	.007	2.608	66.24	L	L
EI 011C 07									SEE NOTE ON PAGE 3 UNDER PLATING						1.000	25.40
EI 012C 01	.109	2.77	.012	.30	.91	.415	.085	.039	0.375	9.53	2.103	.038	0.770	19.56	L	L
EI 012C 02									0.438	11.13	1.584	.028	0.962	24.43	L	L
EI 012C 03									0.500	12.70	1.274	.023	1.151	29.24	L	L
EI 012C 04									0.625	15.88	0.914	.016	1.533	38.94	L	L
EI 012C 05									0.750	19.05	0.713	.013	1.914	48.62	L	L
EI 012C 06									0.875	22.23	0.584	.010	2.296	58.32	L	L
EI 012C 07									SEE NOTE ON PAGE 3 UNDER PLATING						1.000	25.40

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: INSTRUMENT SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*
EI 013C 01	.109	2.77	.013	.33	1.17	.529	.105	.048	0.375	9.53	3.187	.057	0.708	17.98	L	L
EI 013C 02									0.438	11.13	2.409	.043	0.878	22.30	L	L
EI 013C 03									0.500	12.70	1.943	.035	1.046	26.57	L	L
EI 013C 04									0.625	15.88	1.397	.025	1.384	35.15	L	L
EI 013C 05									0.750	19.05	1.091	.019	1.722	43.74	L	L
EI 013C 06									0.875	22.23	0.895	.016	2.060	52.32	L	L
EI 013C 07									SEE NOTE ON PAGE 3 UNDER PLATING							1.000
EI 014C 01	.109	2.77	.014	.36	1.46	.664	.130	.059	0.375	9.53	4.690	.084	0.659	16.74	L	L
EI 014C 02									0.438	11.13	3.559	.064	0.813	20.65	L	L
EI 014C 03									0.500	12.70	2.877	.051	0.963	24.46	L	L
EI 014C 04									0.625	15.88	2.074	.037	1.268	32.21	L	L
EI 014C 05									0.750	19.05	1.622	.029	1.572	39.93	L	L
EI 014C 06									0.875	22.23	1.332	.024	1.876	47.65	L	L
EI 014C 07									SEE NOTE ON PAGE 3 UNDER PLATING							1.000

SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: INSTRUMENT SERIES (METRIC)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	MM	IN.	MM	IN.	N	LB.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	M	S
EIM020A 01	2.00	.079	.20	.008	1.69	.38	.13	.030	10.00	0.394	.099	0.564	25.86	1.018	L	L
EIM020A 02									12.50	0.492	.070	0.401	34.75	1.368	L	L
EIM020A 03									15.00	0.591	.055	0.312	43.64	1.718	L	L
EIM020A 04									17.50	0.689	.045	0.255	52.55	2.069	L	L
EIM020A 05									20.00	0.787	.038	0.215	61.44	2.419	L	L
EIM025A 01	2.00	.079	.25	.010	3.38	.76	.27	.060	10.00	0.394	.325	1.858	19.53	0.769	L	L
EIM025A 02									12.50	0.492	.232	1.327	25.83	1.017	L	L
EIM025A 03									15.00	0.591	.181	1.032	32.16	1.266	L	L
EIM025A 04									17.50	0.689	.148	0.844	38.48	1.515	L	L
EIM025A 05									20.00	0.787	.125	0.714	44.78	1.763	L	L
EIM025A 06	2.00	.079	.25	.010	3.38	.76	.27	.060	22.50	0.886	.108	0.619	51.10	2.012	L	L
EIM025A 07									25.00	0.984	.096	0.546	57.43	2.261	L	L
EIM025B 01	2.50	.098	.25	.010	2.45	.55	.18	.040	9.50	0.374	.168	0.960	22.96	0.904	L	L
EIM025B 02									11.00	0.433	.131	0.750	28.27	1.113	L	L
EIM025B 03									12.50	0.492	.107	0.610	33.83	1.332	L	L
EIM025B 04									15.50	0.610	.079	0.450	44.20	1.740	L	L
EIM025B 05									19.00	0.748	.060	0.340	57.10	2.248	L	L
EIM025B 06	2.50	.098	.25	.010	2.45	.55	.18	.040	22.00	0.866	.051	0.290	66.70	2.626	L	L
EIM025B 07									25.00	0.984	.042	0.240	79.10	3.114	L	L
EIM030B 01	2.50	.098	.30	.012	4.61	1.04	.40	.090	10.00	0.394	.490	2.798	18.59	0.732	L	L
EIM030B 02									12.50	0.492	.333	1.904	25.12	0.989	L	L
EIM030B 03									15.00	0.591	.253	1.443	31.65	1.246	L	L
EIM030B 04									17.50	0.689	.203	1.162	38.18	1.503	L	L
EIM030B 05									20.00	0.787	.170	0.973	44.70	1.760	L	L
EIM030B 06	2.50	.098	.30	.012	4.61	1.04	.40	.090	22.50	0.886	.146	0.836	51.23	2.017	L	L
EIM030B 07									25.00	0.984	.128	0.733	57.76	2.274	L	L
EIM030C 01	3.00	.118	.30	.012	3.74	.84	.33	.075	10.00	0.394	.323	1.847	20.52	0.808	L	L
EIM030C 02									12.50	0.492	.205	1.169	29.13	1.147	L	L
EIM030C 03									15.00	0.591	.150	0.855	37.74	1.486	L	L
EIM030C 04									17.50	0.689	.118	0.674	46.33	1.824	L	L
EIM030C 05									20.00	0.787	.097	0.556	54.94	2.163	L	L
EIM030C 06	3.00	.118	.30	.012	3.74	.84	.33	.075	22.50	0.886	.083	0.474	63.55	2.502	L	L
EIM030C 07									25.00	0.984	.072	0.412	72.16	2.841	L	L
EIM030D 01	4.00	.157	.30	.012	2.71	.61	.25	.055	10.00	0.394	.234	1.335	20.65	0.813	L	L
EIM030D 02									12.50	0.492	.113	0.644	34.57	1.361	L	L
EIM030D 03									15.00	0.591	.074	0.424	48.49	1.909	L	L
EIM030D 04									17.50	0.689	.055	0.316	62.41	2.457	L	L
EIM030D 05									20.00	0.787	.044	0.252	76.33	3.005	L	L
EIM030D 06	4.00	.157	.30	.012	2.71	.61	.25	.055	22.50	0.886	.037	0.210	90.25	3.553	L	L
EIM030D 07									25.00	0.984	.031	0.179	104.17	4.101	L	L
EIM030D 08	4.00	.157	.30	.012	2.71	.61	.25	.055	27.50	1.083	.027	0.157	118.08	4.649	L	L
EIM030D 09									30.00	1.181	.024	0.139	132.00	5.197	L	L

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

A History of Commitment and Customer Service.

Just as the development of springs is often referred to as evolution rather than revolution, so is the development of Lee Spring's reputation for an extensive line of products, a commitment to customer service, and advancements and innovations that respond to our customers' needs.

Over 90 years ago, in 1918, Robert Lee Johannsen founded Lee Spring Co. in Brooklyn, NY, where we maintain our headquarters and primary manufacturing facility to this day. By listening to our customers' needs and responding with a diverse line of quality products, the company has enjoyed consistent organic growth throughout the years. With each innovation or new product, we build our reputation for responsiveness and increase our loyal customer base.

Today, Lee Spring employs over 250 people worldwide, serving a broad base of industrial, commercial and consumer industries. We have maintained a loyal and stable base of employees who have served us well throughout the years, and this remains our foundation for success.

As Lee Spring continues to evolve over another century, we are steadfast in our commitment to our customers and our promise of quality products and responsive innovations.

Lee Spring Timeline

- **1918:** Lee Spring founded by Robert Lee Johannsen on Union Street in Brooklyn NY.
- **1921:** Moved to 347-351 Classon Street, Brooklyn NY.
- **1931:** Moved to 30 Main Street, Brooklyn NY.
- **1966:** Bristol CT plant opens.
- **1978:** Lee Spring Limited opens as distribution facility in the United Kingdom, servicing Great Britain and the European market.
- **1981:** Greensboro NC plant opens.
- **1982:** New York plant moves to 62nd Street, Brooklyn NY.
- **1984:** Tempe AZ plant opens.
- **1985:** St. Charles MO plant opens.
- **1999:** Arizona plant moves to Gilbert AZ.
- **2003:** Lee Spring de México opens in Monterrey México, servicing México and Latin America.
- **2003:** Received ISO Certification. GOLD STAR SERVICE launched.
- **2004:** Lee Spring de México receives ISO Certification.
- **2006:** ISO Certification is renewed in all locations.
- **2007:** Lee Spring Company (Shanghai) Ltd. opens as distribution facility in China, servicing the Chinese and the Pacific Rim market.
- **2008:** Lee Spring's Global Headquarters and New York manufacturing operations relocate to a state of the art facility at 140 58th Street, Brooklyn NY in the historic Brooklyn Army Terminal.
- **2009:** ISO 9001 Certification renewed.
- **2010:** Lee Spring introduces the revolutionary LeeP Plastic Spring and the Bantam Mini Compression Spring.
- **2011:** Spring-i-pedia - The Complete Guide to Spring Engineering website launched.

Copyright ©2011 Lee Spring Company

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	M	S
LE 014A 01	.125	3.18	.014	.36	1.10	.498	.12	.054	0.500	12.70	2.000	0.0360	0.990	25.15	L	L
LE 014A 02									0.563	14.30	1.650	0.0290	1.153	29.29	L	L
LE 014A 03									0.625	15.88	1.400	0.0250	1.325	33.66	L	L
LE 014A 04									0.750	19.05	1.080	0.0190	1.660	42.16	K	K
LE 014A 05									0.813	20.65	0.970	0.0170	1.823	46.30	K	K
LE 014A 06									0.875	22.23	0.880	0.0160	1.985	50.42	K	K
LE 014A 07									0.938	23.83	0.810	0.0140	2.148	54.56	K	K
LE 014A 08									1.000	25.40	0.750	0.0130	2.310	58.67	K	K
LE 014A 09									1.125	28.58	0.643	0.0114	2.655	67.44	K	K
LE 014A 10									1.250	31.75	0.565	0.0100	2.970	75.44	L	L
LE 014A 11									1.375	34.93	0.504	0.0090	3.335	84.71	L	L
LE 014A 12									1.500	38.10	0.455	0.0080	3.654	54.71	L	L
LE 016A 002	.125	3.18	.016	.41	1.60	.725	.20	.090	0.500	12.70	4.100	0.0730	0.840	21.34	L	L
LE 016A 001									0.625	15.88	2.860	0.0510	1.115	28.32	L	L
LE 016A 00									0.750	19.05	2.100	0.0370	1.420	36.07	K	K
LE 016A 0									0.875	22.23	1.750	0.0310	1.675	42.55	K	K
LE 016A 01									1.000	25.40	1.500	0.0270	1.930	49.02	K	K
LE 016A 02									1.125	28.58	1.300	0.0230	2.205	56.01	K	K
LE 016A 03									1.250	31.75	1.200	0.0210	2.420	61.47	L	L
LE 016A 04									1.375	34.93	1.000	0.0180	2.775	70.49	L	L
LE 016A 05									1.500	38.10	0.900	0.0160	3.060	77.72	L	L
LE 016A 06									1.750	44.45	0.780	0.0140	3.540	89.92	L	L
LE 016A 07									2.000	50.80	0.675	0.0120	4.060	103.12	L	L
LE 018A 002	.125	3.18	.018	.46	2.20	.996	.30	.136	0.500	12.70	7.580	0.1350	0.750	19.05	M	M
LE 018A 001									0.625	15.88	5.350	0.0950	0.985	25.02	M	M
LE 018A 00									0.750	19.05	4.000	0.0710	1.230	31.24	L	L
LE 018A 0									0.875	22.23	3.300	0.0590	1.455	36.96	L	L
LE 018A 01									1.000	25.40	2.900	0.0520	1.660	42.16	L	L
LE 018A 02									1.125	28.58	2.500	0.0440	1.885	47.88	L	L
LE 018A 03									1.250	31.75	2.200	0.0390	2.110	53.59	L	L
LE 018A 04									1.375	34.93	2.000	0.0360	2.325	59.06	L	L
LE 018A 05									1.500	38.10	1.800	0.0320	2.560	65.02	M	M
LE 018A 06									1.750	44.45	1.500	0.0270	3.020	76.71	M	M
LE 018A 07									2.000	50.80	1.300	0.0230	3.460	87.88	M	M
LE 018A 08									2.250	57.15	1.130	0.0200	3.930	99.82	M	M
LE 020A 002	.125	3.18	.020	.51	2.90	1.313	.40	.181	0.500	12.70	13.380	0.2390	0.690	17.53	L	L
LE 020A 001									0.625	15.88	9.420	0.1680	0.895	22.73	L	L
LE 020A 00									0.750	19.05	7.500	0.1340	1.080	27.43	K	K
LE 020A 0									0.875	22.23	6.000	0.1070	1.295	32.89	K	K
LE 020A 01									1.000	25.40	5.100	0.0910	1.490	37.85	K	K
LE 020A 02									1.125	28.58	4.400	0.0780	1.695	43.05	K	K
LE 020A 03									1.250	31.75	3.900	0.0700	1.890	48.01	K	K
LE 020A 04									1.375	34.93	3.500	0.0620	2.085	52.96	K	K
LE 020A 05									1.500	38.10	3.200	0.0570	2.280	57.91	K	K
LE 020A 06									1.750	44.45	2.700	0.0480	2.680	68.07	L	L
LE 020A 07									2.000	50.80	2.300	0.0410	3.090	78.49	L	L
LE 020A 08									2.250	57.15	2.000	0.0360	3.500	88.90	L	L

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*
LE 022A 01	.125	3.18	.022	.56	3.90	1.770	.45	.200	0.625	15.88	16.100	0.2880	0.835	21.21	L	L
LE 022A 02									0.750	19.05	12.400	0.2210	1.030	26.16	K	K
LE 022A 03									0.875	22.23	10.200	0.1820	1.215	30.86	K	K
LE 022A 04									1.000	25.40	8.700	0.1550	1.400	35.56	K	K
LE 022A 05									1.125	28.58	7.500	0.1340	1.585	40.26	K	K
LE 022A 06									1.250	31.75	6.600	0.1180	1.770	44.96	L	L
LE 022A 07									1.375	34.93	6.000	0.1070	1.945	49.40	L	L
LE 022A 08									1.500	38.10	5.400	0.0960	2.140	54.36	L	L
LE 022A 09									1.750	44.45	4.500	0.0800	2.520	64.01	L	L
LE 022A 10									2.000	50.80	3.900	0.0700	2.880	73.15	L	L
LE 022A 11									2.250	57.15	3.420	0.0610	3.260	82.80	L	L
LE 022A 12									2.500	63.50	3.050	0.0540	3.630	92.20	L	L
LE 014B 01	.188	4.78	.014	.36	.80	.360	.04	.020	0.625	15.88	0.530	0.0094	2.055	52.20	K	K
LE 014B 02									0.875	22.23	0.280	0.0051	3.585	91.06	J	J
LE 014B 03									1.000	25.40	0.230	0.0041	4.300	109.22	J	J
LE 014B 04									1.125	28.58	0.190	0.0035	5.125	130.18	J	J
LE 014B 05									1.250	31.75	0.170	0.0030	5.720	145.29	J	J
LE 014B 06									1.375	34.93	0.150	0.0026	6.445	163.70	J	J
LE 014B 07									1.500	38.10	0.130	0.0023	7.350	186.69	J	J
LE 014B 08									1.625	41.28	0.120	0.0021	7.955	202.06	K	K
LE 014B 09									1.750	44.45	0.110	0.0019	8.660	219.96	K	K
LE 014B 10									1.875	47.63	0.100	0.0018	9.475	240.67	K	K
LE 014B 11									2.000	50.80	0.090	0.0016	10.440	265.18	K	K
LE 014B 12									2.250	57.15	0.080	0.0014	11.750	298.45	L	L
LE 014B 13									2.500	63.50	0.070	0.0013	13.360	339.34	L	L
LE 016B 01	.188	4.78	.016	.41	1.20	.540	.08	.030	0.625	15.88	1.040	0.0186	1.705	43.31	K	K
LE 016B 02									0.875	22.23	0.570	0.0101	2.840	72.14	J	J
LE 016B 03									1.000	25.40	0.460	0.0082	3.430	87.12	J	J
LE 016B 04									1.125	28.58	0.390	0.0069	3.995	101.47	J	J
LE 016B 05									1.250	31.75	0.340	0.0060	4.540	115.32	J	J
LE 016B 06									1.375	34.93	0.300	0.0053	5.105	129.67	J	J
LE 016B 07									1.500	38.10	0.260	0.0047	5.810	147.57	J	J
LE 016B 08									1.625	41.28	0.240	0.0043	6.295	159.89	K	K
LE 016B 09									1.750	44.45	0.220	0.0039	6.840	173.74	K	K
LE 016B 10									1.875	47.63	0.200	0.0036	7.475	189.87	K	K
LE 016B 11									2.000	50.80	0.180	0.0033	8.220	208.79	K	K
LE 016B 12									2.250	57.15	0.160	0.0029	9.250	234.95	L	L
LE 016B 13									2.500	63.50	0.140	0.0025	10.500	266.70	L	L

SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	M	S
LE 018B 01	.188	4.78	.018	.46	1.50	.679	.14	.063	0.625	15.88	1.900	0.0340	1.345	34.16	K	K
LE 018B 02									0.875	22.23	1.050	0.0190	2.175	55.25	J	J
LE 018B 03									1.000	25.40	0.860	0.0150	2.580	65.53	J	J
LE 018B 04									1.125	28.58	0.730	0.0130	2.985	75.82	J	J
LE 018B 05									1.250	31.75	0.630	0.0110	3.410	86.61	J	J
LE 018B 06									1.375	34.93	0.550	0.0100	3.845	97.66	J	J
LE 018B 07									1.500	38.10	0.500	0.0090	4.220	107.19	J	J
LE 018B 08									1.625	41.28	0.450	0.0080	4.645	117.98	K	K
LE 018B 09									1.750	44.45	0.410	0.0073	5.070	128.78	K	K
LE 018B 10									1.875	47.63	0.380	0.0067	5.455	138.56	K	K
LE 018B 11									2.000	50.80	0.350	0.0060	5.890	149.61	K	K
LE 018B 12									2.250	57.15	0.303	0.0050	6.780	172.21	L	L
LE 018B 13									2.500	63.50	0.270	0.0048	7.540	191.52	L	L
LE 020B 01	.188	4.78	.020	.51	2.00	.906	.22	.100	0.625	15.88	3.300	0.0590	1.165	29.59	K	K
LE 020B 02									0.875	22.23	1.800	0.0320	1.865	47.37	J	J
LE 020B 03									1.000	25.40	1.500	0.0270	2.190	55.63	J	J
LE 020B 04									1.125	28.58	1.300	0.0230	2.495	63.37	J	J
LE 020B 05									1.250	31.75	1.100	0.0200	2.870	72.90	J	J
LE 020B 06									1.375	34.93	0.970	0.0170	3.215	81.66	J	J
LE 020B 07									1.500	38.10	0.870	0.0160	3.550	90.17	J	J
LE 020B 08									1.625	41.28	0.790	0.0140	3.875	98.43	K	K
LE 020B 09									1.750	44.45	0.720	0.0130	4.220	107.19	K	K
LE 020B 10									1.875	47.63	0.660	0.0120	4.575	116.21	K	K
LE 020B 11									2.000	50.80	0.610	0.0110	4.920	124.97	K	K
LE 020B 12									2.250	57.15	0.531	0.0090	5.610	142.49	L	L
LE 020B 13									2.500	63.50	0.470	0.0070	6.290	159.77	L	L
LE 022B 002	.188	4.78	.022	.56	2.50	1.132	.30	.136	0.500	12.70	8.700	0.1550	0.750	19.05	K	K
LE 022B 001									0.625	15.88	5.400	0.0960	1.035	26.29	K	K
LE 022B 00									0.750	19.05	3.800	0.0680	1.330	33.78	J	J
LE 022B 0									0.875	22.23	3.200	0.0570	1.565	39.75	J	J
LE 022B 01									1.000	25.40	2.500	0.0440	1.880	47.75	J	J
LE 022B 02									1.125	28.58	2.100	0.0370	2.175	55.25	J	J
LE 022B 03									1.250	31.75	1.800	0.0320	2.470	62.74	J	J
LE 022B 04									1.375	34.93	1.600	0.0280	2.755	69.98	J	J
LE 022B 05									1.500	38.10	1.400	0.0250	3.070	77.98	J	J
LE 022B 06									1.750	44.45	1.200	0.0210	3.580	90.93	K	K
LE 022B 07									2.000	50.80	1.000	0.0180	4.200	106.68	K	K
LE 022B 08									2.250	57.15	0.890	0.0160	4.720	119.89	K	K
LE 022B 09									2.500	63.50	0.780	0.0140	5.320	135.13	K	K

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	M	S
LE 024B 01	.188	4.78	.024	.61	3.40	1.540	.40	.181	0.625	15.88	8.500	0.1520	0.975	24.77	K	K
LE 024B 02									0.688	17.48	7.200	0.1280	1.108	28.14	J	J
LE 024B 03									0.750	19.05	6.000	0.1070	1.250	31.75	J	J
LE 024B 04									0.813	20.65	5.300	0.0940	1.383	35.13	J	J
LE 024B 05									0.875	22.23	4.800	0.0860	1.505	38.23	J	J
LE 024B 06									0.938	23.83	4.300	0.0770	1.638	41.61	J	J
LE 024B 07									1.000	25.40	4.000	0.0710	1.750	44.45	J	J
LE 024B 08									1.125	28.58	3.360	0.0600	2.015	51.18	J	J
LE 024B 09									1.250	31.75	2.910	0.0520	2.280	57.91	J	J
LE 024B 10									1.375	34.93	2.570	0.0470	2.545	64.64	J	J
LE 024B 11									1.500	38.10	2.300	0.0410	2.800	71.12	J	J
LE 024B 12									1.750	44.45	1.900	0.0340	3.330	84.58	J	J
LE 024B 13									2.000	50.80	1.620	0.0290	3.850	97.79	J	J
LE 024B 14									2.250	57.15	1.420	0.0250	4.360	110.74	J	J
LE 024B 15									2.500	63.50	1.260	0.0230	4.880	123.95	J	J
LE 026B 002	.188	4.78	.026	.66	4.30	1.947	.50	.226	0.500	12.70	20.500	0.3660	0.690	17.53	K	K
LE 026B 001									0.625	15.88	12.630	0.2250	0.925	23.50	K	K
LE 026B 00									0.750	19.05	9.500	0.1690	1.150	29.21	J	J
LE 026B 0									0.875	22.23	7.400	0.1320	1.385	35.18	J	J
LE 026B 01									1.000	25.40	6.100	0.1090	1.620	41.15	J	J
LE 026B 02									1.125	28.58	5.100	0.0910	1.875	47.63	J	J
LE 026B 03									1.250	31.75	4.500	0.0800	2.090	53.09	J	J
LE 026B 04									1.375	34.93	4.000	0.0710	2.325	59.06	J	J
LE 026B 05									1.500	38.10	3.500	0.0620	2.590	65.79	J	J
LE 026B 06									1.750	44.45	2.900	0.0520	3.060	77.72	J	J
LE 026B 07									2.000	50.80	2.500	0.0440	3.520	89.41	J	J
LE 026B 08									2.250	57.15	2.200	0.0390	3.980	101.09	J	J
LE 026B 09									2.500	63.50	1.930	0.0340	4.470	113.54	J	J
LE 029B 01	.188	4.78	.029	.74	5.80	2.627	.75	.300	0.625	15.88	22.400	0.3990	0.855	21.72	K	K
LE 029B 02									0.688	17.48	19.200	0.3420	0.948	24.08	J	J
LE 029B 03									0.750	19.05	16.800	0.3000	1.050	26.67	J	J
LE 029B 04									0.813	20.65	14.900	0.2660	1.153	29.29	J	J
LE 029B 05									0.875	22.23	13.100	0.2340	1.265	32.13	J	J
LE 029B 06									0.938	23.83	12.000	0.2140	1.328	33.73	J	J
LE 029B 07									1.000	25.40	11.000	0.1960	1.460	37.08	J	J
LE 029B 08									1.125	28.58	9.280	0.1660	1.665	42.29	K	K
LE 029B 09									1.250	31.75	8.090	0.1440	1.870	47.50	K	K
LE 029B 10									1.375	34.93	7.170	0.1280	2.075	52.71	K	K
LE 029B 11									1.500	38.10	6.440	0.1150	2.280	57.91	K	K
LE 029B 12									1.750	44.45	5.330	0.0950	2.700	68.58	K	K
LE 029B 13									2.000	50.80	4.560	0.0810	3.110	78.99	K	K
LE 029B 14									2.250	57.15	4.010	0.0720	3.510	89.15	K	K
LE 029B 15									2.500	63.50	3.540	0.0630	3.930	99.82	K	K

SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	M	S
LE 031B 002	.188	4.78	.031	.79	7.00	3.170	.90	.408	0.500	12.70	52.000	0.9290	0.620	15.75	K	K
LE 031B 001									0.625	15.88	31.720	0.5660	0.815	20.70	K	K
LE 031B 00									0.750	19.05	24.100	0.4300	1.010	25.65	J	J
LE 031B 0									0.875	22.23	19.000	0.3390	1.195	30.35	J	J
LE 031B 01									1.000	25.40	15.800	0.2820	1.390	35.31	J	J
LE 031B 02									1.125	28.58	13.500	0.2410	1.585	40.26	J	J
LE 031B 03									1.250	31.75	11.700	0.2090	1.780	45.21	J	J
LE 031B 04									1.375	34.93	10.400	0.1850	1.965	49.91	J	J
LE 031B 05									1.500	38.10	9.200	0.1640	2.170	55.12	J	J
LE 031B 06									1.750	44.45	7.700	0.1370	2.550	64.77	J	J
LE 031B 07									2.000	50.80	6.600	0.1180	2.930	74.42	J	J
LE 031B 08									2.250	57.15	5.700	0.1020	3.330	84.58	K	K
LE 031B 09									2.500	63.50	5.100	0.0910	3.710	94.23	K	K
LE 031B 10									2.750	69.85	4.500	0.0800	4.120	104.65	K	K
LE 034B 01	.188	4.78	.034	.86	9.00	4.080	.85	.390	0.625	15.88	53.300	0.9520	0.775	19.69	K	K
LE 034B 02									0.750	19.05	40.000	0.7140	0.950	24.13	J	J
LE 034B 03									0.875	22.23	31.000	0.5540	1.135	28.83	J	J
LE 034B 04									1.000	25.40	26.000	0.4640	1.310	33.27	J	J
LE 034B 05									1.125	28.58	22.400	0.4000	1.485	37.72	J	J
LE 034B 06									1.250	31.75	19.300	0.3450	1.670	42.42	J	J
LE 034B 07									1.375	34.93	17.200	0.3070	1.845	46.86	J	J
LE 034B 08									1.500	38.10	15.500	0.2770	2.020	51.31	K	K
LE 034B 09									1.750	44.45	12.900	0.2300	2.380	60.45	K	K
LE 034B 10									2.000	50.80	11.000	0.1960	2.740	69.60	K	K
LE 034B 11									2.250	57.15	9.600	0.1710	3.090	78.49	K	K
LE 034B 12									2.500	63.50	8.500	0.1520	3.450	87.63	K	K
LE 034B 13									2.750	69.85	7.600	0.1360	3.820	97.03	K	K
LE 018C 01	.250	6.35	.018	.46	1.10	.500	.10	.045	0.625	15.88	1.270	0.0226	1.415	35.94	K	K
LE 018C 02									0.750	19.05	0.750	0.0133	2.100	53.34	K	K
LE 018C 03									0.875	22.23	0.530	0.0094	2.765	70.23	J	J
LE 018C 04									1.000	25.40	0.410	0.0073	3.440	87.38	J	J
LE 018C 05									1.125	28.58	0.330	0.0060	4.075	103.51	J	J
LE 018C 06									1.250	31.75	0.280	0.0050	4.830	122.68	K	K
LE 018C 07									1.375	34.93	0.240	0.0044	5.385	136.78	K	K
LE 018C 08									1.500	38.10	0.220	0.0038	6.270	159.26	K	K
LE 018C 09									1.750	44.45	0.170	0.0031	7.640	194.06	K	K
LE 018C 10									2.000	50.80	0.150	0.0026	9.160	232.66	K	K
LE 018C 11									2.250	57.15	0.130	0.0022	9.960	252.98	K	K
LE 018C 12									2.500	63.50	0.110	0.0020	11.610	294.89	K	K
LE 018C 13									2.750	69.85	0.100	0.0018	12.770	324.36	K	K

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*
LE 022C 01	.250	6.35	.022	.56	2.10	.950	.20	.090	0.625	15.88	3.300	0.0590	1.205	30.61	K	K
LE 022C 02									0.750	19.05	2.000	0.0360	1.700	43.18	K	K
LE 022C 03									0.875	22.23	1.500	0.0270	2.145	54.48	J	J
LE 022C 04									1.000	25.40	1.140	0.0200	2.670	67.82	J	J
LE 022C 05									1.125	28.58	0.940	0.0170	3.145	79.88	J	J
LE 022C 06									1.250	31.75	0.800	0.0140	3.630	92.20	K	K
LE 022C 07									1.375	34.93	0.700	0.0130	4.085	103.76	K	K
LE 022C 08									1.500	38.10	0.600	0.0110	4.670	118.62	K	K
LE 022C 09									1.750	44.45	0.500	0.0090	5.550	140.97	K	K
LE 022C 10									2.000	50.80	0.400	0.0070	6.750	171.45	K	K
LE 022C 11									2.250	57.15	0.360	0.0060	7.530	191.26	K	K
LE 022C 12									2.500	63.50	0.320	0.0057	8.440	214.38	K	K
LE 022C 13									2.750	69.85	0.280	0.0050	9.540	242.32	K	K
LE 026C 002	.250	6.35	.026	.66	3.10	1.404	.40	.181	0.500	12.70	20.300	0.3630	0.630	16.00	K	K
LE 026C 001									0.625	15.88	7.600	0.1360	0.985	25.02	K	K
LE 026C 00									0.750	19.05	4.800	0.0860	1.310	33.27	J	J
LE 026C 0									0.875	22.23	3.500	0.0620	1.645	41.78	J	J
LE 026C 01									1.000	25.40	2.800	0.0500	1.960	49.78	J	J
LE 026C 02									1.125	28.58	2.300	0.0410	2.295	58.29	J	J
LE 026C 03									1.250	31.75	1.900	0.0340	2.670	67.82	J	J
LE 026C 04									1.375	34.93	1.700	0.0300	2.965	75.31	J	J
LE 026C 05									1.500	38.10	1.500	0.0270	3.300	83.82	J	J
LE 026C 06									1.750	44.45	1.200	0.0210	4.000	101.60	K	K
LE 026C 07									2.000	50.80	1.000	0.0180	4.700	119.38	K	K
LE 026C 08									2.250	57.15	0.860	0.0150	5.390	136.91	K	K
LE 026C 09									2.500	63.50	0.760	0.0140	6.050	153.67	K	K
LE 026C 10									2.750	69.85	0.680	0.0120	6.720	170.69	K	K
LE 026C 11									3.000	76.20	0.600	0.0110	7.500	190.50	K	K
LE 029C 001	.250	6.35	.029	.74	4.30	1.947	.55	.249	0.625	15.88	13.100	0.2340	0.915	23.24	K	K
LE 029C 00									0.750	19.05	7.900	0.1410	1.220	30.99	K	K
LE 029C 0									0.875	22.23	6.000	0.1070	1.505	38.23	J	J
LE 029C 01									1.000	25.40	4.700	0.0840	1.800	45.72	J	J
LE 029C 02									1.125	28.58	3.900	0.0700	2.085	52.96	J	J
LE 029C 03									1.250	31.75	3.400	0.0610	2.350	59.69	J	J
LE 029C 04									1.375	34.93	2.900	0.0520	2.665	67.69	J	J
LE 029C 05									1.500	38.10	2.550	0.0450	2.970	75.44	J	J
LE 029C 06									1.750	44.45	2.100	0.0370	3.540	89.92	K	K
LE 029C 07									2.000	50.80	1.800	0.0320	4.080	103.63	K	K
LE 029C 08									2.250	57.15	1.600	0.0280	4.590	116.59	K	K
LE 029C 09									2.500	63.50	1.370	0.0240	5.240	133.10	K	K
LE 029C 10									2.750	69.85	1.220	0.0220	5.820	147.83	K	K
LE 029C 11									3.000	76.20	1.100	0.0200	6.410	162.81	K	K

SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	M	S
LE 031C 001	.250	6.35	.031	.79	5.20	2.355	.70	.317	0.625	15.88	18.840	0.3360	0.865	21.97	K	K
LE 031C 00									0.750	19.05	12.000	0.2140	1.130	28.70	K	K
LE 031C 0									0.875	22.23	8.800	0.1570	1.385	35.18	J	J
LE 031C 01									1.000	25.40	6.900	0.1230	1.650	41.91	J	J
LE 031C 02									1.125	28.58	5.700	0.1020	1.915	48.64	J	J
LE 031C 03									1.250	31.75	4.900	0.0870	2.170	55.12	J	J
LE 031C 04									1.375	34.93	4.300	0.0770	2.425	61.60	J	J
LE 031C 05									1.500	38.10	3.800	0.0680	2.680	68.07	J	J
LE 031C 06									1.750	44.45	3.000	0.0530	3.250	82.55	J	J
LE 031C 07									2.000	50.80	2.600	0.0460	3.730	94.74	K	K
LE 031C 08									2.250	57.15	2.200	0.0390	4.300	109.22	K	K
LE 031C 09									2.500	63.50	2.000	0.0360	4.750	120.65	K	K
LE 031C 10									2.750	69.85	1.750	0.0310	5.320	135.13	K	K
LE 031C 11									3.000	76.20	1.570	0.0280	5.870	149.10	K	K
LE 034C 001	.250	6.35	.034	.86	6.80	3.080	.85	.385	0.625	15.88	28.400	0.5060	0.835	21.21	K	K
LE 034C 00									0.750	19.05	17.800	0.3170	1.080	27.43	K	K
LE 034C 0									0.875	22.23	13.500	0.2410	1.315	33.40	J	J
LE 034C 01									1.000	25.40	10.800	0.1920	1.550	39.37	J	J
LE 034C 02									1.125	28.58	9.100	0.1620	1.775	45.09	J	J
LE 034C 03									1.250	31.75	7.900	0.1410	2.000	50.80	J	J
LE 034C 04									1.375	34.93	6.700	0.1190	2.265	57.53	J	J
LE 034C 05									1.500	38.10	6.100	0.1090	2.480	62.99	K	K
LE 034C 06									1.750	44.45	4.900	0.0870	2.960	75.18	K	K
LE 034C 07									2.000	50.80	4.200	0.0750	3.420	86.87	K	K
LE 034C 08									2.250	57.15	3.600	0.0640	3.900	99.06	K	K
LE 034C 09									2.500	63.50	3.200	0.0570	4.360	110.74	L	L
LE 034C 10									2.750	69.85	2.850	0.0510	4.840	122.94	L	L
LE 034C 11									3.000	76.20	2.600	0.0460	5.290	134.37	L	L
LE 037C 00	.250	6.35	.037	.94	8.50	3.850	1.00	.453	0.625	15.88	44.700	0.7980	0.795	20.19	K	K
LE 037C 0									0.750	19.05	29.100	0.5190	1.010	25.65	J	J
LE 037C 01									1.000	25.40	17.700	0.3160	1.420	36.07	J	J
LE 037C 02									1.125	28.58	15.000	0.2670	1.625	41.28	J	J
LE 037C 03									1.250	31.75	12.700	0.2260	1.840	46.74	J	J
LE 037C 04									1.375	34.93	11.000	0.1960	2.055	52.20	J	J
LE 037C 05									1.500	38.10	9.700	0.1730	2.270	57.66	J	J
LE 037C 06									1.750	44.45	8.000	0.1430	2.690	68.33	K	K
LE 037C 07									2.000	50.80	6.700	0.1190	3.120	79.25	K	K
LE 037C 08									2.250	57.15	5.800	0.1030	3.540	89.92	K	K
LE 037C 09									2.500	63.50	5.100	0.0910	3.970	100.84	L	L
LE 037C 10									2.750	69.85	4.600	0.0820	4.380	111.25	L	L
LE 037C 11									3.000	76.20	4.100	0.0730	4.830	122.68	L	L
LE 037C 12									3.250	82.55	3.750	0.0670	5.250	133.35	L	L
LE 037C 13									3.500	88.90	3.420	0.0610	5.690	144.53	L	L

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	M	S
LE 041C 01	.250	6.35	.041	1.04	11.70	5.300	1.05	.476	0.750	19.05	51.600	0.9230	0.960	24.38	K	K
LE 041C 02									1.000	25.40	30.000	0.5350	1.360	34.54	K	K
LE 041C 03									1.125	28.58	25.000	0.4460	1.555	39.50	K	K
LE 041C 04									1.250	31.75	21.500	0.3840	1.750	44.45	K	K
LE 041C 05									1.375	34.93	19.000	0.3390	1.935	49.15	K	K
LE 041C 06									1.500	38.10	16.800	0.3000	2.130	54.10	K	K
LE 041C 07									1.750	44.45	13.800	0.2460	2.520	64.01	L	L
LE 041C 08									2.000	50.80	11.700	0.2090	2.910	73.91	L	L
LE 041C 09									2.250	57.15	10.100	0.1810	3.300	83.82	L	L
LE 041C 10									2.500	63.50	8.900	0.1590	3.700	93.98	L	L
LE 041C 11									2.750	69.85	8.000	0.1430	4.080	103.63	L	L
LE 041C 12									3.000	76.20	7.250	0.1290	4.470	113.54	L	L
LE 041C 13									3.500	88.90	6.100	0.1090	5.250	133.35	L	L
LE 030CD 01	.313	7.94	.030	.76	4.00	1.812	.40	.181	1.000	25.40	3.500	0.0620	2.030	51.56	G	G
LE 030CD 02									1.125	28.58	2.700	0.0480	2.455	62.36	G	G
LE 030CD 03									1.250	31.75	2.300	0.0410	2.820	71.63	G	G
LE 030CD 04									1.375	34.93	1.900	0.0340	3.265	82.93	G	G
LE 030CD 05									1.500	38.10	1.700	0.0300	3.620	91.95	G	G
LE 030CD 06									1.750	44.45	1.300	0.0230	4.520	114.81	J	J
LE 030CD 07									2.000	50.80	1.100	0.0200	5.270	133.86	K	K
LE 030CD 08									2.250	57.15	0.940	0.0170	6.080	154.43	K	K
LE 030CD 09									2.500	63.50	0.830	0.0150	6.840	173.74	K	K
LE 037CD 01	.313	7.94	.037	.94	7.00	3.170	.83	.376	1.000	25.40	9.000	0.1600	1.690	42.93	G	G
LE 037CD 02									1.125	28.58	7.000	0.1250	2.005	50.93	G	G
LE 037CD 03									1.250	31.75	6.000	0.1070	2.280	57.91	G	G
LE 037CD 04									1.375	34.93	5.200	0.0930	2.565	65.15	G	G
LE 037CD 05									1.500	38.10	4.600	0.0820	2.840	72.14	G	G
LE 037CD 06									1.750	44.45	3.600	0.0640	3.460	87.88	J	J
LE 037CD 07									2.000	50.80	3.100	0.0550	3.990	101.35	K	L
LE 037CD 08									2.250	57.15	2.600	0.0460	4.620	117.35	K	L
LE 037CD 09									2.500	63.50	2.400	0.0430	5.070	128.78	K	L
LE 037CD 10									2.750	69.85	2.100	0.0380	5.690	144.53	L	M
LE 037CD 11									3.000	76.20	1.900	0.0340	6.250	158.75	L	M
LE 043CD 01	.313	7.94	.043	1.09	10.25	4.650	1.30	.589	1.000	25.40	22.430	0.4000	1.400	35.56	J	J
LE 043CD 02									1.125	28.58	17.980	0.3210	1.625	41.28	J	J
LE 043CD 03									1.250	31.75	15.000	0.2680	1.850	46.99	J	J
LE 043CD 04									1.375	34.93	12.870	0.2300	2.075	52.71	J	J
LE 043CD 05									1.500	38.10	11.270	0.2010	2.300	58.42	J	J
LE 043CD 06									1.750	44.45	9.030	0.1610	2.750	69.85	K	K
LE 043CD 07									2.000	50.80	7.530	0.1340	3.200	81.28	K	K
LE 043CD 08									2.250	57.15	6.460	0.1150	3.640	92.46	L	L
LE 043CD 09									2.500	63.50	5.650	0.1010	4.090	103.89	N	P
LE 043CD 10									2.750	69.85	5.020	0.0900	4.540	115.32	N	P
LE 043CD 11									3.000	76.20	4.520	0.0810	4.990	126.75	N	P

SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*
LE 049CD 01	.313	7.94	.049	1.24	15.00	6.793	1.80	.815	1.000	25.40	36.000	0.6420	1.370	34.80	J	J
LE 049CD 02									1.125	28.58	30.000	0.5350	1.565	39.75	J	J
LE 049CD 03									1.250	31.75	26.000	0.4640	1.760	44.70	J	J
LE 049CD 04									1.375	34.93	23.000	0.4100	1.945	49.40	J	J
LE 049CD 05									1.500	38.10	21.000	0.3740	2.130	54.10	J	J
LE 049CD 06									1.750	44.45	16.500	0.2940	2.550	64.77	K	K
LE 049CD 07									2.000	50.80	14.000	0.2500	2.940	74.68	K	L
LE 049CD 08									2.250	57.15	12.000	0.2140	3.350	85.09	L	M
LE 049CD 09									2.500	63.50	11.000	0.1960	3.700	93.98	N	P
LE 049CD 10									2.750	69.85	10.000	0.1780	4.070	103.38	N	P
LE 049CD 11									3.000	76.20	9.000	0.1600	4.470	113.54	N	P
LE 055CD 01	.313	7.94	.055	1.40	21.00	9.520	3.00	1.360	1.000	25.40	82.210	1.4680	1.220	30.99	K	K
LE 055CD 02									1.125	28.58	66.780	1.1920	1.395	35.43	K	K
LE 055CD 03									1.250	31.75	56.220	1.0040	1.570	39.88	K	K
LE 055CD 04									1.375	34.93	48.550	0.8670	1.745	44.32	K	K
LE 055CD 05									1.500	38.10	42.720	0.7630	1.920	48.77	K	K
LE 055CD 06									1.750	44.45	34.450	0.6150	2.270	57.66	L	L
LE 055CD 07									2.000	50.80	28.850	0.5150	2.620	66.55	L	M
LE 055CD 08									2.250	57.15	24.830	0.4430	2.970	75.44	M	N
LE 055CD 09									2.500	63.50	21.790	0.3890	3.330	84.58	P	R
LE 055CD 10									2.750	69.85	19.410	0.3470	3.680	93.47	P	R
LE 055CD 11									3.000	76.20	17.500	0.3120	4.030	102.36	P	R
LE 026D 01	.375	9.53	.026	.66	2.30	1.040	.22	.100	1.000	25.40	1.300	0.0230	2.600	66.04	G	G
LE 026D 02									1.125	28.58	0.920	0.0160	3.385	85.98	G	G
LE 026D 03									1.250	31.75	0.720	0.0130	4.140	105.16	G	G
LE 026D 04									1.375	34.93	0.600	0.0110	4.845	123.06	G	G
LE 026D 05									1.500	38.10	0.500	0.0090	5.660	143.76	G	G
LE 026D 06									1.750	44.45	0.390	0.0070	7.080	179.83	G	G
LE 031D 0	.375	9.53	.031	.79	3.40	1.540	.30	.136	0.875	22.23	4.860	0.0870	1.515	38.48	J	J
LE 031D 01									1.000	25.40	3.100	0.0550	2.000	50.80	G	G
LE 031D 02									1.125	28.58	2.300	0.0410	2.475	62.87	G	G
LE 031D 03									1.250	31.75	1.800	0.0320	2.970	75.44	G	G
LE 031D 04									1.375	34.93	1.500	0.0270	3.445	87.50	G	G
LE 031D 05									1.500	38.10	1.300	0.0230	3.880	98.55	G	G
LE 031D 06									1.750	44.45	0.958	0.0170	4.980	126.49	G	G
LE 031D 07									2.000	50.80	0.780	0.0140	5.970	151.64	G	G
LE 031D 08									2.250	57.15	0.660	0.0120	6.950	176.53	G	G
LE 031D 09									2.500	63.50	0.570	0.0100	7.940	201.68	G	G
LE 031D 10									2.750	69.85	0.504	0.0090	8.950	227.33	J	J
LE 031D 11									3.000	76.20	0.451	0.0080	9.890	251.20	J	J

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	M	S
LE 034D 01	.375	9.53	.034	.86	4.60	2.083	.50	.226	1.000	25.40	4.800	0.0860	1.850	46.99	G	G
LE 034D 02									1.125	28.58	3.600	0.0640	2.265	57.53	G	G
LE 034D 03									1.250	31.75	2.800	0.0500	2.710	68.83	G	G
LE 034D 04									1.375	34.93	2.400	0.0430	3.085	78.36	G	G
LE 034D 05									1.500	38.10	2.000	0.0360	3.550	90.17	G	G
LE 034D 06									1.750	44.45	1.600	0.0280	4.310	109.47	J	J
LE 034D 07									2.000	50.80	1.300	0.0230	5.150	130.81	K	L
LE 037D 0	.375	9.53	.037	.94	5.80	2.627	.70	.317	0.750	19.05	24.300	0.3430	0.960	24.38	J	J
LE 037D 01									1.000	25.40	7.700	0.1370	1.660	42.16	G	G
LE 037D 02									1.125	28.58	5.600	0.1000	2.035	51.69	G	G
LE 037D 03									1.250	31.75	4.400	0.0780	2.410	61.21	G	G
LE 037D 04									1.375	34.93	3.700	0.0660	2.755	69.98	G	G
LE 037D 05									1.500	38.10	3.200	0.0570	3.090	78.49	G	G
LE 037D 06									1.750	44.45	2.400	0.0430	3.880	98.55	J	J
LE 037D 07									2.000	50.80	2.000	0.0360	4.550	115.57	K	K
LE 037D 08									2.250	57.15	1.700	0.0300	5.250	133.35	K	L
LE 037D 09									2.500	63.50	1.400	0.0250	6.140	155.96	K	L
LE 037D 10									2.750	69.85	1.260	0.0220	6.800	172.72	K	L
LE 037D 11									3.000	76.20	1.140	0.0200	7.470	189.74	K	L
LE 039D 01	.375	9.53	.039	.99	6.80	3.080	.80	.362	1.000	25.40	9.600	0.1710	1.630	41.40	G	G
LE 039D 02									1.125	28.58	7.000	0.1250	1.985	50.42	G	G
LE 039D 03									1.250	31.75	5.700	0.1020	2.300	58.42	G	G
LE 039D 04									1.375	34.93	4.800	0.0860	2.625	66.68	G	G
LE 039D 05									1.500	38.10	4.100	0.0730	2.960	75.18	G	G
LE 039D 06									1.750	44.45	3.200	0.0570	3.630	92.20	J	J
LE 039D 07									2.000	50.80	2.600	0.0460	4.310	109.47	K	L
LE 039D 08									2.250	57.15	2.200	0.0390	4.980	126.49	K	L
LE 039D 09									2.500	63.50	1.900	0.0340	5.660	143.76	L	M
LE 039D 10									2.750	69.85	1.690	0.0300	6.300	160.02	L	M
LE 039D 11									3.000	76.20	1.510	0.0270	6.970	177.04	M	N
LE 041D 0	.375	9.53	.041	1.04	7.80	3.540	.90	.408	0.750	19.05	38.000	0.6790	0.930	23.62	J	J
LE 041D 01									1.000	25.40	12.700	0.2260	1.540	39.12	G	G
LE 041D 02									1.125	28.58	9.500	0.1690	1.855	47.12	G	G
LE 041D 03									1.250	31.75	7.600	0.1360	2.160	54.86	G	G
LE 041D 04									1.375	34.93	6.400	0.1140	2.455	62.36	G	G
LE 041D 05									1.500	38.10	5.500	0.0980	2.750	69.85	G	G
LE 041D 06									1.750	44.45	4.200	0.0750	3.390	86.11	J	J
LE 041D 07									2.000	50.80	3.400	0.0610	4.030	102.36	K	L
LE 041D 08									2.250	57.15	2.900	0.0520	4.630	117.60	K	L
LE 041D 09									2.500	63.50	2.500	0.0440	5.260	133.60	L	M
LE 041D 10									2.750	69.85	2.190	0.0390	5.900	149.86	M	N
LE 041D 11									3.000	76.20	1.960	0.0350	6.520	165.61	N	P
LE 041D 12									3.500	88.90	1.630	0.0290	7.730	196.34	N	P
LE 041D 13									4.000	101.60	1.380	0.0250	8.997	228.52	N	P
LE 041D 14									4.500	114.30	1.200	0.0210	10.250	260.35	N	P
LE 041D 15									5.000	127.00	1.070	0.0190	11.450	290.83	N	P

SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	M	S
LE 045D 0	.375	9.53	.045	1.14	10.00	4.535	1.20	.544	0.750	19.05	57.000	1.0180	0.900	22.86	J	J
LE 045D 01									1.000	25.40	20.200	0.3600	1.440	36.58	G	G
LE 045D 02									1.125	28.58	15.600	0.2780	1.685	42.80	G	G
LE 045D 03									1.250	31.75	12.200	0.2180	1.970	50.04	G	G
LE 045D 04									1.375	34.93	10.100	0.1800	2.245	57.02	G	G
LE 045D 05									1.500	38.10	8.800	0.1570	2.500	63.50	G	G
LE 045D 06									1.750	44.45	7.500	0.1340	2.920	74.17	J	J
LE 045D 07									2.000	50.80	5.600	0.1000	3.570	90.68	J	K
LE 045D 08									2.250	57.15	4.800	0.0860	4.080	103.63	K	L
LE 045D 09									2.500	63.50	4.100	0.0730	4.650	118.11	L	M
LE 045D 10									2.750	69.85	3.600	0.0640	5.190	131.83	L	M
LE 045D 11									3.000	76.20	3.200	0.0570	5.750	146.05	L	M
LE 045D 12									3.500	88.90	2.600	0.0460	6.880	174.75	M	N
LE 045D 13									4.000	101.60	2.250	0.0400	7.910	200.91	M	N
LE 045D 14									4.500	114.30	1.980	0.0350	8.940	227.08	N	P
LE 045D 15									5.000	127.00	1.760	0.0310	10.000	254.00	N	P
LE 045D 16									5.500	139.70	1.580	0.0280	11.070	281.18	N	R
LE 045D 17									6.000	152.40	1.430	0.0260	12.154	308.71	N	R
LE 049D 01	.375	9.53	.049	1.24	13.00	5.900	1.50	.680	1.000	25.40	30.000	0.5350	1.380	35.05	J	J
LE 049D 02									1.125	28.58	23.700	0.4220	1.615	41.02	J	J
LE 049D 03									1.250	31.75	19.000	0.3390	1.860	47.24	J	J
LE 049D 04									1.375	34.93	16.000	0.2850	2.095	53.21	J	J
LE 049D 05									1.500	38.10	13.900	0.2480	2.330	59.18	J	J
LE 049D 06									1.750	44.45	10.800	0.1920	2.810	71.37	K	K
LE 049D 07									2.000	50.80	9.000	0.1600	3.280	83.31	K	L
LE 049D 08									2.250	57.15	7.500	0.1340	3.780	96.01	L	M
LE 049D 09									2.500	63.50	6.400	0.1140	4.300	109.22	N	P
LE 049D 10									2.750	69.85	5.800	0.1030	4.730	120.14	N	P
LE 049D 11									3.000	76.20	5.200	0.0930	5.210	132.33	N	P
LE 049D 12									3.500	88.90	4.200	0.0750	6.240	158.50	N	R
LE 049D 13									4.000	101.60	3.600	0.0640	7.190	182.63	P	S
LE 049D 14									4.500	114.30	3.200	0.0570	8.090	205.49	R	T
LE 049D 15									5.000	127.00	2.770	0.0490	9.150	232.41	S	U
LE 049D 16									5.500	139.70	2.500	0.0450	10.100	256.54	S	U
LE 049D 17									6.000	152.40	2.270	0.0410	11.066	281.08	S	W
LE 052D 01	.375	9.53	.052	1.32	15.50	7.020	1.75	.792	1.000	25.40	40.700	0.7260	1.340	34.04	K	K
LE 052D 02									1.125	28.58	31.000	0.5530	1.565	39.75	K	K
LE 052D 03									1.250	31.75	25.000	0.4460	1.800	45.72	K	K
LE 052D 04									1.375	34.93	21.700	0.3870	2.005	50.93	K	K
LE 052D 05									1.500	38.10	18.600	0.3320	2.240	56.90	K	K
LE 052D 06									1.750	44.45	14.500	0.2580	2.700	68.58	K	K
LE 052D 07									2.000	50.80	13.100	0.2160	3.050	77.47	K	K
LE 052D 08									2.250	57.15	10.200	0.1820	3.600	91.44	L	L
LE 052D 09									2.500	63.50	8.800	0.1570	4.060	103.12	N	N
LE 052D 10									2.750	69.85	7.800	0.1390	4.510	114.55	N	N
LE 052D 11									3.000	76.20	7.000	0.1250	4.960	125.98	N	P

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*
LE 055D 0	.375	9.53	.055	1.40	17.50	7.926	2.00	.906	1.000	25.40	55.800	0.9950	1.280	32.51	K	L
LE 055D 01									1.250	31.75	34.800	0.6200	1.700	43.18	K	L
LE 055D 02									1.375	34.93	29.800	0.5310	1.895	48.13	K	L
LE 055D 03									1.500	38.10	25.400	0.4530	2.110	53.59	K	L
LE 055D 04									1.750	44.45	19.900	0.3550	2.530	64.26	K	L
LE 055D 05									2.000	50.80	16.400	0.2920	2.950	74.93	L	M
LE 055D 06									2.250	57.15	13.900	0.2480	3.370	85.60	N	P
LE 055D 07									2.500	63.50	11.900	0.2120	3.800	96.52	N	P
LE 055D 08									2.750	69.85	10.600	0.1890	4.210	106.93	N	P
LE 055D 09									3.000	76.20	9.500	0.1690	4.630	117.60	N	R
LE 055D 10									3.500	88.90	7.900	0.1410	5.460	138.68	N	S
LE 055D 11									4.000	101.60	6.800	0.1210	6.280	159.51	P	T
LE 055D 12									4.500	114.30	5.900	0.1050	7.130	181.10	R	U
LE 055D 13									5.000	127.00	5.300	0.0940	7.920	201.17	S	W
LE 055D 14									5.500	139.70	4.680	0.0830	8.810	223.77	T	X
LE 055D 15									6.000	152.40	4.230	0.0750	9.660	245.36	U	X
LE 058D 01	.375	9.53	.058	1.47	20.00	9.070	2.50	1.134	1.000	25.40	71.100	1.2680	1.250	31.75	L	M
LE 058D 02									1.125	28.58	56.100	1.0000	1.435	36.45	L	M
LE 058D 03									1.250	31.75	44.400	0.7920	1.640	41.66	L	M
LE 058D 04									1.375	34.93	38.100	0.6790	1.835	46.61	L	M
LE 058D 05									1.500	38.10	33.300	0.5940	2.030	51.56	L	M
LE 058D 06									1.750	44.45	26.000	0.4640	2.420	61.47	L	M
LE 058D 07									2.000	50.80	21.800	0.3890	2.800	71.12	L	M
LE 058D 08									2.250	57.15	18.400	0.3280	3.200	81.28	M	N
LE 058D 09									2.500	63.50	15.900	0.2840	3.600	91.44	P	R
LE 058D 10									2.750	69.85	14.200	0.2530	3.980	101.09	P	R
LE 058D 11									3.000	76.20	12.700	0.2260	4.380	111.25	R	S
LE 058D 12									3.500	88.90	10.570	0.1890	5.156	130.96	R	U
LE 058D 13									4.000	101.60	9.030	0.1610	5.938	150.83	R	U
LE 058D 14									4.500	114.30	7.880	0.1410	6.721	170.71	R	W
LE 058D 15									5.000	127.00	6.990	0.1250	7.504	190.60	S	Y
LE 058D 16									5.500	139.70	6.280	0.1120	8.287	210.49	T	Z
LE 058D 17									6.000	152.40	5.700	0.1020	9.070	230.38	U	AA
LE 037DD 01	.420	10.67	.037	.94	4.83	2.190	.50	.227	1.000	25.40	8.800	0.1570	1.492	37.90	K	L
LE 037DD 02									1.125	28.58	5.500	0.0980	1.912	48.56	K	L
LE 037DD 03									1.250	31.75	3.900	0.0700	2.360	59.94	K	L
LE 037DD 04									1.375	34.93	3.100	0.0550	2.772	70.41	L	M
LE 037DD 05									1.500	38.10	2.500	0.0450	3.232	82.09	M	N
LE 037DD 06									1.750	44.45	1.900	0.0340	4.028	102.31	P	R
LE 037DD 07									2.000	50.80	1.500	0.0270	4.886	124.10	P	R
LE 037DD 08									2.250	57.15	1.200	0.0210	5.858	148.79	R	S
LE 037DD 09									2.500	63.50	1.000	0.0180	6.826	173.38	R	S
LE 037DD 10									2.750	69.85	0.900	0.0160	7.557	191.95	S	T
LE 037DD 11									3.000	76.20	0.800	0.0140	8.412	213.66	S	T

SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	M	S
LE 055DD 01	.420	10.67	.055	1.40	16.11	7.306	1.40	.635	1.000	25.40	56.600	1.0110	1.260	32.00	L	M
LE 055DD 02									1.125	28.58	38.800	0.6930	1.504	38.20	L	M
LE 055DD 03									1.250	31.75	29.000	0.5180	1.757	44.63	L	M
LE 055DD 04									1.375	34.93	23.500	0.4200	2.000	50.80	L	M
LE 055DD 05									1.500	38.10	19.500	0.3480	2.254	57.25	L	M
LE 055DD 06									1.750	44.45	14.700	0.2630	2.751	69.88	M	N
LE 055DD 07									2.000	50.80	11.800	0.2110	3.247	82.47	R	S
LE 055DD 08									2.250	57.15	9.800	0.1750	3.751	95.28	R	S
LE 055DD 09									2.500	63.50	8.400	0.1500	4.251	107.98	R	S
LE 055DD 10									2.750	69.85	7.400	0.1320	4.738	120.35	S	T
LE 055DD 11									3.000	76.20	6.600	0.1180	5.229	132.82	T	U
LE 037DE 01	.438	11.11	.037	.94	5.50	2.491	.55	.249	1.000	25.40	3.800	0.0680	2.300	58.42	K	L
LE 037DE 02									1.125	28.58	3.000	0.0530	2.775	70.49	K	L
LE 037DE 03									1.250	31.75	2.400	0.0430	3.310	84.07	K	L
LE 037DE 04									1.375	34.93	2.000	0.0360	3.855	97.92	L	M
LE 037DE 05									1.500	38.10	1.750	0.0310	4.330	109.98	M	N
LE 037DE 06									1.750	44.45	1.400	0.0250	5.290	134.37	P	R
LE 037DE 07									2.000	50.80	1.100	0.0200	6.500	165.10	P	R
LE 037DE 08									2.250	57.15	0.970	0.0170	7.350	186.69	R	S
LE 037DE 09									2.500	63.50	0.850	0.0150	8.320	211.33	R	S
LE 037DE 10									2.750	69.85	0.750	0.0130	9.350	237.49	S	T
LE 037DE 11									3.000	76.20	0.660	0.0120	10.500	266.70	S	T
LE 046DE 01	.438	11.11	.046	1.17	10.00	4.540	1.00	.450	1.000	25.40	18.700	0.3340	1.480	37.59	L	M
LE 046DE 02									1.125	28.58	13.200	0.2360	1.805	45.85	L	M
LE 046DE 03									1.250	31.75	9.750	0.1740	2.170	55.12	L	M
LE 046DE 04									1.375	34.93	8.000	0.1430	2.505	63.63	L	M
LE 046DE 05									1.500	38.10	6.800	0.1210	2.820	71.63	L	M
LE 046DE 06									1.750	44.45	5.100	0.0910	3.510	89.15	M	N
LE 046DE 07									2.000	50.80	4.100	0.0730	4.200	106.68	R	S
LE 046DE 08									2.250	57.15	3.400	0.0610	4.900	124.46	R	S
LE 046DE 09									2.500	63.50	2.900	0.0520	5.600	142.24	R	S
LE 046DE 10									2.750	69.85	2.550	0.0450	6.280	159.51	S	T
LE 046DE 11									3.000	76.20	2.250	0.0400	7.000	177.80	T	U
LE 055DE 01	.438	11.11	.055	1.40	15.00	6.793	1.50	.679	1.000	25.40	29.000	0.5170	1.470	37.34	L	M
LE 055DE 02									1.125	28.58	22.500	0.4010	1.725	43.82	L	M
LE 055DE 03									1.250	31.75	19.000	0.3390	1.960	49.78	L	M
LE 055DE 04									1.375	34.93	16.000	0.2850	2.215	56.26	L	M
LE 055DE 05									1.500	38.10	14.000	0.2500	2.460	62.48	L	M
LE 055DE 06									1.750	44.45	11.000	0.1960	2.980	75.69	M	N
LE 055DE 07									2.000	50.80	9.300	0.1660	3.450	87.63	R	S
LE 055DE 08									2.250	57.15	8.000	0.1430	3.940	100.08	R	S
LE 055DE 09									2.500	63.50	6.800	0.1210	4.490	114.05	R	S
LE 055DE 10									2.750	69.85	6.000	0.1070	5.000	127.00	S	T
LE 055DE 11									3.000	76.20	5.400	0.0960	5.500	139.70	T	U

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	M	S
LE 034E 01	.500	12.70	.034	.86	3.60	1.633	.30	.136	1.250	31.75	1.890	0.0340	3.000	76.20	K	L
LE 034E 02									1.375	34.93	1.420	0.0250	3.695	93.85	K	L
LE 034E 03									1.500	38.10	1.100	0.0200	4.500	114.30	K	L
LE 034E 04									1.750	44.45	0.793	0.0140	5.930	150.62	L	M
LE 034E 05									2.000	50.80	0.610	0.0110	7.410	188.21	M	N
LE 034E 06									2.250	57.15	0.496	0.0090	8.850	224.79	M	N
LE 037E 01	.500	12.70	.037	.94	4.30	1.950	.40	.181	1.250	31.75	3.000	0.0530	2.550	64.77	K	L
LE 037E 02									1.375	34.93	2.200	0.0390	3.145	79.88	K	L
LE 037E 03									1.500	38.10	1.700	0.0300	3.790	96.27	K	L
LE 037E 04									1.750	44.45	1.200	0.0210	5.000	127.00	L	M
LE 037E 05									2.000	50.80	0.900	0.0160	6.330	160.78	M	N
LE 037E 06									2.250	57.15	0.766	0.0130	7.310	185.67	N	P
LE 037E 07									2.500	63.50	0.700	0.0130	8.072	205.03	N	P
LE 037E 08									2.750	69.85	0.600	0.0110	9.248	234.90	N	P
LE 037E 09									3.000	76.20	0.500	0.0090	10.793	274.14	N	P
LE 037E 10									3.500	88.90	0.400	0.0070	13.226	335.94	P	R
LE 037E 11									4.000	101.60	0.300	0.0050	16.996	431.70	S	W
LE 037E 12									4.500	114.30	0.300	0.0050	17.496	444.40	S	W
LE 037E 13									5.000	127.00	0.200	0.0040	24.418	620.22	T	Z
LE 041E 01	.500	12.70	.041	1.04	5.80	2.630	.50	.227	1.250	31.75	4.900	0.0870	2.330	59.18	K	L
LE 041E 02									1.375	34.93	3.700	0.0660	2.805	71.25	K	L
LE 041E 03									1.500	38.10	2.900	0.0520	3.330	84.58	K	L
LE 041E 04									1.750	44.45	2.100	0.0370	4.270	108.46	L	M
LE 041E 05									2.000	50.80	1.600	0.0280	5.310	134.87	M	N
LE 041E 06									2.250	57.15	1.300	0.0230	6.330	160.78	N	P
LE 041E 07									2.500	63.50	1.110	0.0200	7.270	184.66	N	P
LE 041E 08									2.750	69.85	0.963	0.0170	8.270	210.06	N	P
LE 041E 09									3.000	76.20	0.800	0.0140	9.628	244.55	N	P
LE 041E 10									3.500	88.90	0.700	0.0130	11.071	281.20	P	R
LE 041E 11									4.000	101.60	0.600	0.0110	12.831	325.91	S	W
LE 041E 12									4.500	114.30	0.500	0.0090	15.090	383.29	S	W
LE 041E 13									5.000	127.00	0.400	0.0070	18.218	462.74	T	Z
LE 045E 00	.500	12.70	.045	1.14	7.50	3.401	.70	.317	1.000	25.40	21.800	0.3890	1.310	33.27	K	L
LE 045E 01									1.250	31.75	7.700	0.1380	2.130	54.10	K	L
LE 045E 02									1.375	34.93	5.700	0.1020	2.565	65.15	K	L
LE 045E 03									1.500	38.10	4.700	0.0840	2.950	74.93	K	L
LE 045E 04									1.750	44.45	3.400	0.0610	3.750	95.25	L	M
LE 045E 05									2.000	50.80	2.600	0.0460	4.620	117.35	L	M
LE 045E 06									2.250	57.15	2.100	0.0370	5.490	139.45	N	P
LE 045E 07									2.500	63.50	1.800	0.0320	6.280	159.51	N	P
LE 045E 08									2.750	69.85	1.550	0.0280	7.140	181.36	N	P
LE 045E 09									3.000	76.20	1.370	0.0240	7.960	202.18	N	P
LE 045E 10									3.500	88.90	1.100	0.0200	9.679	245.85	P	R
LE 045E 11									4.000	101.60	0.900	0.0160	11.555	293.50	S	W
LE 045E 12									4.500	114.30	0.800	0.0140	13.000	330.20	S	W
LE 045E 13									5.000	127.00	0.700	0.0130	14.713	373.71	T	Z

SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*
LE 049E 01	.500	12.70	.049	1.24	10.00	4.530	.88	.398	1.250	31.75	11.800	0.2100	2.020	51.31	L	M
LE 049E 02									1.500	38.10	7.260	0.1290	2.760	70.10	L	M
LE 049E 03									1.750	44.45	5.240	0.0935	3.490	88.65	L	M
LE 049E 04									2.000	50.80	4.000	0.0710	4.280	108.71	L	M
LE 049E 05									2.250	57.15	3.300	0.0590	5.010	127.25	L	M
LE 049E 06									2.500	63.50	2.800	0.0500	5.760	146.30	L	N
LE 049E 07									2.750	69.85	2.400	0.0430	6.550	166.37	M	N
LE 049E 08									3.000	76.20	2.140	0.0380	7.260	184.40	N	P
LE 049E 09									3.500	88.90	1.750	0.0310	8.710	221.23	P	R
LE 049E 10									4.000	101.60	1.470	0.0260	10.200	259.08	R	S
LE 055E 0	.500	12.70	.055	1.40	13.20	5.978	1.30	.589	1.250	31.75	20.640	0.3680	1.830	46.48	L	M
LE 055E 01									1.375	34.93	15.600	0.2780	2.135	54.23	L	M
LE 055E 02									1.500	38.10	13.000	0.2320	2.420	61.47	L	M
LE 055E 03									1.750	44.45	9.400	0.1680	3.020	76.71	L	M
LE 055E 04									2.000	50.80	7.400	0.1320	3.610	91.69	L	M
LE 055E 05									2.250	57.15	6.100	0.1090	4.200	106.68	L	N
LE 055E 06									2.500	63.50	5.200	0.0930	4.790	121.67	M	P
LE 055E 07									2.750	69.85	4.500	0.0800	5.390	136.91	P	S
LE 055E 08									3.000	76.20	3.900	0.0700	6.050	153.67	R	T
LE 055E 09									3.500	88.90	3.200	0.0570	7.220	183.39	R	W
LE 055E 10									4.000	101.60	2.700	0.0480	8.410	213.61	S	X
LE 055E 11									4.500	114.30	2.300	0.0410	9.670	245.62	T	Z
LE 055E 12									5.000	127.00	2.070	0.0370	10.750	273.05	U	AA
LE 063E 0	.500	12.70	.063	1.60	19.00	8.605	2.00	.906	1.250	31.75	40.630	0.7260	1.670	42.42	L	M
LE 063E 01									1.375	34.93	31.400	0.5600	1.915	48.64	L	M
LE 063E 02									1.500	38.10	25.700	0.4580	2.160	54.86	L	M
LE 063E 03									1.750	44.45	18.900	0.3370	2.650	67.31	L	M
LE 063E 04									2.000	50.80	14.900	0.2660	3.140	79.76	L	M
LE 063E 05									2.250	57.15	12.300	0.2190	3.630	92.20	L	R
LE 063E 06									2.500	63.50	10.700	0.1910	4.090	103.89	M	R
LE 063E 07									2.750	69.85	9.100	0.1620	4.620	117.35	P	S
LE 063E 08									3.000	76.20	8.200	0.1460	5.070	128.78	R	T
LE 063E 09									3.500	88.90	6.700	0.1190	6.040	153.42	R	W
LE 063E 10									4.000	101.60	5.600	0.1000	7.040	178.82	S	X
LE 063E 11									4.500	114.30	4.800	0.0860	8.040	204.22	T	Z
LE 063E 12									5.000	127.00	4.300	0.0770	8.950	227.33	U	AB

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*
LE 067E 01	.500	12.70	.067	1.70	24.00	10.890	3.50	1.590	1.250	31.75	55.300	0.9878	1.620	41.15	M	N
LE 067E 02									1.500	38.10	35.600	0.6355	2.080	52.83	M	N
LE 067E 03									1.750	44.45	26.200	0.4684	2.530	64.26	M	N
LE 067E 04									2.000	50.80	20.800	0.3709	2.990	75.95	M	N
LE 067E 05									2.250	57.15	17.200	0.3070	3.440	87.38	M	S
LE 067E 06									2.500	63.50	14.700	0.2619	3.900	99.06	N	S
LE 067E 07									2.750	69.85	12.800	0.2283	4.360	110.74	R	T
LE 067E 08									3.000	76.20	11.300	0.2024	4.810	122.17	S	U
LE 067E 09									3.500	88.90	9.200	0.1649	5.720	145.29	S	X
LE 067E 10									4.000	101.60	7.800	0.1392	6.630	168.40	T	Y
LE 067E 11									4.500	114.30	6.700	0.1204	7.540	191.52	U	AA
LE 067E 12									5.000	127.00	5.900	0.1060	8.450	214.63	W	AC
LE 075E 01	.500	12.70	.075	1.91	35.00	15.880	5.00	2.270	1.250	31.75	97.620	1.7430	1.560	39.62	N	P
LE 075E 02									1.500	38.10	63.960	1.1420	1.970	50.04	N	P
LE 075E 03									1.750	44.45	47.560	0.8490	2.380	60.45	N	P
LE 075E 04									2.000	50.80	37.850	0.6760	2.790	70.87	N	P
LE 075E 05									2.250	57.15	31.440	0.5610	3.200	81.28	N	T
LE 075E 06									2.500	63.50	26.880	0.4800	3.620	91.95	P	T
LE 075E 07									2.750	69.85	23.480	0.4190	4.030	102.36	S	U
LE 075E 08									3.000	76.20	20.840	0.3720	4.440	112.78	T	W
LE 075E 09									3.500	88.90	17.020	0.3040	5.260	133.60	T	Y
LE 075E 10									4.000	101.60	14.380	0.2570	6.090	154.69	U	Z
LE 075E 11									4.500	114.30	12.450	0.2220	6.910	175.51	W	AB
LE 075E 12									5.000	127.00	10.970	0.1960	7.730	196.34	X	AD
LE 055F 00	.625	15.88	.055	1.40	10.50	4.755	1.00	.453	1.500	38.10	9.820	0.1750	2.470	62.74	M	N
LE 055F 0									1.750	44.45	6.130	0.1090	3.300	83.82	M	N
LE 055F 01									2.000	50.80	4.500	0.0800	4.110	104.39	M	N
LE 055F 02									2.250	57.15	3.500	0.0620	4.960	125.98	M	N
LE 055F 03									2.500	63.50	2.900	0.0520	5.780	146.81	P	S
LE 055F 04									2.750	69.85	2.500	0.0440	6.550	166.37	P	T
LE 055F 05									3.000	76.20	2.100	0.0370	7.520	191.01	R	U
LE 055F 06									3.500	88.90	1.700	0.0300	9.090	230.89	S	X
LE 055F 07									4.000	101.60	1.400	0.0250	10.790	274.07	T	Z
LE 063F 01	.625	15.88	.063	1.60	15.00	6.793	1.50	.679	2.000	50.80	8.900	0.1590	3.520	89.41	N	R
LE 063F 02									2.250	57.15	6.700	0.1190	4.260	108.20	N	S
LE 063F 03									2.500	63.50	5.800	0.1030	4.830	122.68	P	T
LE 063F 04									2.750	69.85	4.900	0.0870	5.510	139.95	P	U
LE 063F 05									3.000	76.20	4.300	0.0770	6.140	155.96	R	W
LE 063F 06									3.500	88.90	3.400	0.0610	7.470	189.74	S	Z
LE 063F 07									4.000	101.60	2.900	0.0520	8.660	219.96	T	AB
LE 063F 08									4.500	114.30	2.400	0.0430	10.130	257.30	U	AD
LE 063F 09									5.000	127.00	2.130	0.0380	11.340	288.04	W	AE

SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	M	S
LE 069F 01	.625	15.88	.069	1.75	19.00	8.605	2.00	.906	2.000	50.80	14.100	0.2510	3.210	81.53	N	T
LE 069F 02									2.250	57.15	11.300	0.2010	3.750	95.25	N	U
LE 069F 03									2.500	63.50	9.400	0.1680	4.310	109.47	P	W
LE 069F 04									2.750	69.85	8.100	0.1440	4.850	123.19	P	X
LE 069F 05									3.000	76.20	7.100	0.1260	5.390	136.91	R	Y
LE 069F 06									3.500	88.90	5.600	0.1000	6.540	166.12	S	AA
LE 069F 07									4.000	101.60	4.600	0.0820	7.700	195.58	T	AC
LE 069F 08									4.500	114.30	4.000	0.0710	8.750	222.25	U	AG
LE 069F 09									5.000	127.00	3.470	0.0620	9.900	251.46	W	AJ
LE 049G 01	.750	19.05	.049	1.24	6.60	3.000	.59	.270	2.000	50.80	2.300	0.0410	4.610	117.09	N	T
LE 049G 02									2.250	57.15	1.500	0.0270	6.260	159.00	P	U
LE 049G 03									2.500	63.50	1.200	0.0210	7.510	190.75	R	X
LE 049G 04									2.750	69.85	0.900	0.0160	9.430	239.52	S	X
LE 049G 05									3.000	76.20	0.800	0.0140	10.510	266.95	S	Z
LE 049G 06									3.250	82.55	0.700	0.0125	11.840	300.74	T	AA
LE 049G 07									3.500	88.90	0.600	0.0107	13.520	343.41	U	AB
LE 055G 01	.750	19.05	.055	1.40	8.80	3.986	.80	.362	2.000	50.80	3.400	0.0610	4.350	110.49	P	T
LE 055G 02									2.250	57.15	2.500	0.0440	5.450	138.43	R	U
LE 055G 03									2.500	63.50	2.000	0.0360	6.500	165.10	R	X
LE 055G 04									2.750	69.85	1.600	0.0280	7.750	196.85	S	Y
LE 055G 05									3.000	76.20	1.400	0.0250	8.710	221.23	S	Z
LE 055G 06									3.500	88.90	1.000	0.0180	11.500	292.10	U	AC
LE 063G 01	.750	19.05	.063	1.60	12.80	5.797	1.20	.543	2.000	50.80	6.600	0.1180	3.760	95.50	N	S
LE 063G 02									2.250	57.15	4.900	0.0870	4.620	117.35	P	U
LE 063G 03									2.500	63.50	3.800	0.0680	5.550	140.97	P	W
LE 063G 04									2.750	69.85	3.200	0.0570	6.380	162.05	R	X
LE 063G 05									3.000	76.20	2.700	0.0480	7.300	185.42	R	Z
LE 063G 06									3.500	88.90	2.100	0.0370	9.020	229.11	T	AC
LE 063G 07									4.000	101.60	1.700	0.0300	10.820	274.83	U	AD
LE 063G 08									4.500	114.30	1.400	0.0250	12.790	324.87	W	AJ
LE 063G 09									5.000	127.00	1.200	0.0210	14.670	372.62	Y	AK
LE 063G 10									5.500	139.70	1.100	0.0200	16.050	407.67	Y	AL
LE 069G 01	.750	19.05	.069	1.75	16.50	7.500	1.60	.730	2.000	50.80	10.250	0.1830	3.450	87.63	P	T
LE 069G 02									2.250	57.15	7.700	0.1380	4.190	106.43	P	W
LE 069G 03									2.500	63.50	6.150	0.1100	4.920	124.97	R	X
LE 069G 04									2.750	69.85	5.130	0.0920	5.650	143.51	R	Z
LE 069G 05									3.000	76.20	4.310	0.0770	6.460	164.08	S	AA
LE 069G 06									3.500	88.90	3.370	0.0600	7.920	201.17	U	AD
LE 069G 07									4.000	101.60	2.730	0.0490	9.460	240.28	W	AJ
LE 069G 08									4.500	114.30	2.320	0.0410	10.920	277.37	X	AK
LE 069G 09									5.000	127.00	2.000	0.0360	12.450	316.23	Y	AL
LE 069G 10									5.500	139.70	1.770	0.0320	13.920	353.57	Z	AM

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*
LE 075G 01	.750	19.05	.075	1.90	20.70	9.375	2.00	.906	2.000	50.80	16.200	0.2890	3.150	80.01	P	T
LE 075G 02									2.250	57.15	11.800	0.2100	3.830	97.28	P	W
LE 075G 03									2.500	63.50	9.300	0.1660	4.510	114.55	R	X
LE 075G 04									2.750	69.85	7.900	0.1410	5.120	130.05	R	Z
LE 075G 05									3.000	76.20	6.700	0.1190	5.790	147.07	S	AA
LE 075G 06									3.500	88.90	5.200	0.0930	7.100	180.34	U	AD
LE 075G 07									4.000	101.60	4.300	0.0770	8.350	212.09	W	AJ
LE 075G 08									4.500	114.30	3.600	0.0640	9.690	246.13	X	AK
LE 075G 09									5.000	127.00	3.100	0.0550	11.030	280.16	Y	AL
LE 075G 10									5.500	139.70	2.730	0.0490	12.350	313.69	Z	AM
LE 075G 11									6.000	152.40	2.450	0.0440	13.630	346.20	AD	AN
LE 085G 01	.750	19.05	.085	2.16	31.50	14.288	2.80	1.270	2.000	50.80	31.360	0.5600	2.920	74.17	R	U
LE 085G 02									2.250	57.15	23.180	0.4140	3.490	88.65	R	X
LE 085G 03									2.500	63.50	18.380	0.3280	4.060	103.12	S	Y
LE 085G 04									2.750	69.85	14.810	0.2640	4.690	119.13	S	AA
LE 085G 05									3.000	76.20	13.000	0.2320	5.210	132.33	T	AB
LE 085G 06									3.500	88.90	10.000	0.1780	6.370	161.80	W	AE
LE 085G 07									4.000	101.60	8.200	0.1460	7.500	190.50	X	AK
LE 085G 08									4.500	114.30	6.920	0.1230	8.650	219.71	Y	AL
LE 085G 09									5.000	127.00	6.060	0.1080	9.740	247.40	Z	AM
LE 093G 01	.750	19.05	.093	2.36	40.00	18.180	3.50	1.590	2.000	50.80	45.500	0.8130	2.800	71.12	S	W
LE 093G 02									2.250	57.15	35.200	0.6290	3.290	83.57	S	Y
LE 093G 03									2.500	63.50	27.600	0.4930	3.820	97.03	T	Z
LE 093G 04									2.750	69.85	23.500	0.4200	4.300	109.22	U	AB
LE 093G 05									3.000	76.20	20.400	0.3640	4.790	121.67	W	AC
LE 093G 06									3.500	88.90	15.800	0.2820	5.810	147.57	X	AG
LE 093G 07									4.000	101.60	12.900	0.2300	6.830	173.48	Y	AL
LE 093G 08									4.500	114.30	10.900	0.1950	7.850	199.39	Z	AM
LE 093G 09									5.000	127.00	9.600	0.1710	8.800	223.52	AA	AN
LE 105G 01	.750	19.05	.105	2.67	56.00	25.400	6.00	2.720	2.000	50.80	83.900	1.5000	2.600	66.04	T	X
LE 105G 02									2.250	57.15	64.200	1.1500	3.030	76.96	T	Z
LE 105G 03									2.500	63.50	52.000	0.9300	3.460	87.88	U	AA
LE 105G 04									2.750	69.85	43.700	0.7800	3.900	99.06	W	AC
LE 105G 05									3.000	76.20	37.700	0.6700	4.330	109.98	X	AD
LE 105G 06									3.500	88.90	29.500	0.5300	5.190	131.83	Y	AJ
LE 105G 07									4.000	101.60	24.300	0.4300	6.080	154.43	Z	AM
LE 105G 08									4.500	114.30	20.600	0.3700	6.910	175.51	AA	AN
LE 105G 09									5.000	127.00	17.900	0.3200	7.790	197.87	AB	AO

SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	M	S
LE 112G 01	.750	19.05	.112	2.84	69.00	31.300	8.00	3.630	2.000	50.80	116.690	2.0840	2.520	64.01	U	Y
LE 112G 02									2.250	57.15	89.830	1.6040	2.930	74.42	U	AA
LE 112G 03									2.500	63.50	73.020	1.3040	3.340	84.84	W	AB
LE 112G 04									2.750	69.85	61.510	1.0980	3.740	95.00	X	AD
LE 112G 05									3.000	76.20	53.130	0.9490	4.150	105.41	Y	AE
LE 112G 06									3.500	88.90	41.760	0.7460	4.960	125.98	Z	AK
LE 112G 07									4.000	101.60	34.400	0.6140	5.770	146.56	AA	AN
LE 112G 08									4.500	114.30	29.240	0.5220	6.590	167.39	AB	AO
LE 112G 09									5.000	127.00	25.430	0.4540	7.400	187.96	AC	AP
LE 055H 01	.850	21.59	.055	1.40	7.80	3.533	.70	.317	2.000	50.80	3.200	0.0570	4.220	107.19	W	AG
LE 055H 02									2.250	57.15	2.100	0.0370	5.630	143.00	W	AG
LE 055H 03									2.500	63.50	1.600	0.0280	6.940	176.28	W	AG
LE 055H 04									2.750	69.85	1.200	0.0210	8.670	220.22	W	AG
LE 063H 01	.850	21.59	.063	1.60	11.30	5.118	1.00	.453	2.250	57.15	3.900	0.0700	4.890	124.21	X	AJ
LE 063H 02									2.500	63.50	2.900	0.0520	6.050	153.67	X	AJ
LE 063H 03									2.750	69.85	2.300	0.0410	7.230	183.64	X	AJ
LE 063H 04									3.000	76.20	1.900	0.0340	8.420	213.87	Y	AL
LE 063H 05									3.500	88.90	1.400	0.0250	10.860	275.84	Y	AL
LE 075H 01	.850	21.59	.075	1.90	18.40	8.333	1.70	.770	2.250	57.15	9.700	0.1730	3.970	100.84	Y	AK
LE 075H 02									2.500	63.50	7.500	0.1340	4.730	120.14	Y	AK
LE 075H 03									2.750	69.85	6.000	0.1070	5.530	140.46	Y	AK
LE 075H 04									3.000	76.20	5.000	0.0890	6.340	161.04	Y	AK
LE 075H 05									3.500	88.90	3.800	0.0680	7.890	200.41	Z	AL
LE 075H 06									4.000	101.60	3.000	0.0530	9.570	243.08	Z	AL
LE 075H 07									4.500	114.30	2.500	0.0440	11.180	283.97	AA	AM
LE 075H 08									4.750	120.65	2.300	0.0410	12.010	305.05	AA	AM
LE 075H 09									5.000	127.00	2.200	0.0390	12.590	319.79	AA	AM
LE 085H 0	.850	21.59	.085	2.16	25.90	11.730	2.40	1.087	2.000	50.80	27.000	0.4820	2.870	72.90	Z	AL
LE 085H 01									2.250	57.15	19.200	0.3420	3.470	88.14	Z	AL
LE 085H 02									2.500	63.50	14.000	0.2500	4.180	106.17	Z	AL
LE 085H 03									2.750	69.85	11.100	0.2010	4.870	123.70	Z	AL
LE 085H 04									3.000	76.20	9.500	0.1690	5.470	138.94	Z	AL
LE 085H 05									3.500	88.90	7.300	0.1300	6.720	170.69	AB	AN
LE 085H 06									4.000	101.60	5.800	0.1030	8.050	204.47	AB	AN
LE 085H 07									4.500	114.30	4.900	0.0870	9.300	236.22	AB	AN
LE 085H 08									4.750	120.65	4.500	0.0800	9.970	253.24	AB	AN
LE 085H 09									5.000	127.00	4.100	0.0730	10.730	272.54	AB	AN
LE 085H 10									5.500	139.70	3.600	0.0640	12.030	305.56	AB	AN
LE 085H 11									6.000	152.40	3.250	0.0580	13.230	336.04	AB	AN
LE 063J 01	1.000	25.40	.063	1.60	9.70	4.393	.90	.408	2.500	63.50	2.600	0.0460	5.880	149.35	Z	AL
LE 063J 02									2.750	69.85	1.900	0.0340	7.380	187.45	Z	AL
LE 063J 03									3.000	76.20	1.500	0.0270	8.870	225.30	Z	AL
LE 063J 04									3.250	82.55	1.200	0.0210	10.580	268.73	Z	AL

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	M	S
LE 075J 01	1.000	25.40	.075	1.90	15.70	7.110	1.40	.634	2.500	63.50	6.300	0.1120	4.770	121.16	AA	AL
LE 075J 02									2.750	69.85	4.600	0.0820	5.860	148.84	AA	AL
LE 075J 03									3.000	76.20	3.600	0.0640	6.970	177.04	AA	AL
LE 075J 04									3.500	88.90	2.600	0.0460	9.000	228.60	AA	AM
LE 075J 05									4.000	101.60	2.000	0.0360	11.150	283.21	AB	AM
LE 075J 06									4.500	114.30	1.700	0.0300	12.910	327.91	AC	AO
LE 075J 07									5.000	127.00	1.400	0.0250	15.210	386.33	AC	AO
LE 085J 01	1.000	25.40	.085	2.16	22.30	10.054	2.00	.906	2.750	69.85	8.500	0.1520	5.140	130.56	AA	AM
LE 085J 02									3.000	76.20	6.800	0.1210	5.990	152.15	AA	AM
LE 085J 03									3.500	88.90	5.000	0.0890	7.560	192.02	AA	AM
LE 085J 04									4.000	101.60	3.900	0.0700	9.210	233.93	AB	AN
LE 085J 05									4.500	114.30	3.200	0.0570	10.840	275.34	AD	AO
LE 085J 06									5.000	127.00	2.700	0.0480	12.520	318.01	AD	AO
LE 095J 0	1.000	25.40	.095	2.41	30.00	13.605	2.70	1.224	2.500	63.50	24.100	0.4300	3.633	92.28	AB	AM
LE 095J 01									2.750	69.85	15.000	0.2670	4.570	116.08	AB	AM
LE 095J 02									3.000	76.20	12.200	0.2180	5.240	133.10	AB	AM
LE 095J 03									3.500	88.90	8.700	0.1550	6.640	168.66	AB	AM
LE 095J 04									4.000	101.60	6.900	0.1230	7.960	202.18	AD	AO
LE 095J 05									4.500	114.30	5.600	0.1000	9.380	238.25	AD	AO
LE 095J 06									5.000	127.00	4.800	0.0860	10.690	271.53	AE	AP
LE 095J 07									5.500	139.70	4.120	0.0730	12.130	308.10	AJ	AR
LE 095J 08									6.000	152.40	3.660	0.0650	13.460	341.88	AK	AS
LE 095J 09									6.500	165.10	3.270	0.0580	14.850	377.19	AL	AT
LE 095J 10									7.000	177.80	2.960	0.0530	16.220	411.99	AM	AU
LE 095J 11									8.000	203.20	2.400	0.0430	19.373	492.07	AO	AZE
LE 095J 12									9.000	228.60	2.100	0.0380	22.000	558.80	AO	AZE
LE 105J 0	1.000	25.40	.105	2.67	40.00	18.141	4.00	1.814	2.500	63.50	39.000	0.6960	3.423	86.94	AC	AK
LE 105J 01									2.750	69.85	23.200	0.4140	4.300	109.22	AC	AK
LE 105J 02									3.000	76.20	19.500	0.3480	4.850	123.19	AD	AL
LE 105J 03									3.500	88.90	13.900	0.2480	6.090	154.69	AE	AM
LE 105J 04									4.000	101.60	11.100	0.1980	7.240	183.90	AE	AP
LE 105J 05									4.500	114.30	9.020	0.1610	8.490	215.65	AJ	AS
LE 105J 06									5.000	127.00	7.730	0.1380	9.660	245.36	AK	AW
LE 105J 07									5.500	139.70	6.670	0.1190	10.900	276.86	AL	AZ
LE 105J 08									6.000	152.40	5.870	0.1050	12.130	308.10	AM	AZC
LE 105J 09									6.500	165.10	5.310	0.0950	13.280	337.31	AN	AZD
LE 105J 10									7.000	177.80	4.810	0.0860	14.480	367.79	AO	AZE
LE 105J 11									8.000	203.20	4.200	0.0750	16.571	420.90	AO	AZE
LE 105J 12									9.000	228.60	3.600	0.0640	19.000	482.60	AP	AZE

SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	M	S
LE 115J 0	1.000	25.40	.115	2.92	50.00	22.676	5.00	2.268	2.500	63.50	60.400	1.0790	3.245	82.42	AD	AL
LE 115J 01									2.750	69.85	38.200	0.6810	3.930	99.82	AD	AL
LE 115J 02									3.000	76.20	30.200	0.5380	4.490	114.05	AD	AN
LE 115J 03									3.500	88.90	22.700	0.4050	5.480	139.19	AE	AR
LE 115J 04									4.000	101.60	17.700	0.3160	6.540	166.12	AJ	AU
LE 115J 05									4.500	114.30	14.500	0.2590	7.600	193.04	AK	AY
LE 115J 06									5.000	127.00	12.500	0.2230	8.600	218.44	AL	AZA
LE 115J 07									5.500	139.70	10.800	0.1920	9.670	245.62	AM	AZB
LE 115J 08									6.000	152.40	9.500	0.1690	10.740	272.80	AN	AZC
LE 115J 09									6.500	165.10	8.600	0.1540	11.730	297.94	AO	AZD
LE 115J 10									7.000	177.80	7.800	0.1390	12.770	324.36	AP	AZE
LE 115J 11									8.000	203.20	6.700	0.1200	14.716	373.79	AP	AZE
LE 115J 12									9.000	228.60	5.800	0.1040	16.759	425.68	AP	AZE
LE 125J 0	1.000	25.40	.125	3.18	70.00	31.746	7.00	3.175	2.500	63.50	87.300	1.5590	3.222	81.84	AE	AM
LE 125J 01									2.750	69.85	58.210	1.0390	3.830	97.28	AE	AM
LE 125J 02									3.000	76.20	47.620	0.8500	4.320	109.73	AE	AO
LE 125J 03									3.500	88.90	34.920	0.6240	5.300	134.62	AG	AS
LE 125J 04									4.000	101.60	27.570	0.4920	6.290	159.77	AK	AW
LE 125J 05									4.500	114.30	22.780	0.4070	7.270	184.66	AL	AZ
LE 125J 06									5.000	127.00	19.400	0.3460	8.250	209.55	AM	AZB
LE 125J 07									5.500	139.70	16.900	0.3020	9.230	234.44	AN	AZC
LE 125J 08									6.000	152.40	14.970	0.2670	10.210	259.33	AO	AZD
LE 125J 09									6.500	165.10	13.800	0.2460	11.065	281.05	AO	AZD
LE 125J 10									7.000	177.80	12.500	0.2230	12.040	305.82	AP	AZE
LE 125J 11									8.000	203.20	10.500	0.1880	14.000	355.60	AP	AZE
LE 125J 12									9.000	228.60	9.000	0.1610	16.000	406.40	AP	AZE
LE 135J 0	1.000	25.40	.135	3.43	85.00	38.549	9.00	4.082	2.500	63.50	134.100	2.3950	3.067	77.90	AG	AN
LE 135J 01									2.750	69.85	86.230	1.5400	3.630	92.20	AG	AN
LE 135J 02									3.000	76.20	70.880	1.2660	4.070	103.38	AG	AP
LE 135J 03									3.500	88.90	52.280	0.9340	4.950	125.73	AJ	AT
LE 135J 04									4.000	101.60	41.410	0.7400	5.840	148.34	AL	AX
LE 135J 05									4.500	114.30	34.280	0.6120	6.720	170.69	AM	AZA
LE 135J 06									5.000	127.00	29.250	0.5220	7.600	193.04	AN	AZC
LE 135J 07									5.500	139.70	25.500	0.4550	8.480	215.39	AO	AZD
LE 135J 08									6.000	152.40	22.610	0.4040	9.360	237.74	AP	AZE
LE 135J 09									6.500	165.10	20.800	0.3710	10.154	257.91	AP	AZE
LE 135J 10									7.000	177.80	18.900	0.3380	11.021	279.93	AR	AZF
LE 135J 11									8.000	203.20	15.900	0.2840	12.780	324.61	AR	AZF
LE 135J 12									9.000	228.60	13.700	0.2450	14.547	369.49	AR	AZF

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	M	S
LE 148J 01	1.000	25.40	.148	3.76	112.05	50.816	9.68	4.390	2.500	63.50	202.800	3.6220	3.000	76.20	AJ	AO
LE 148J 02									2.750	69.85	159.300	2.8450	3.393	86.18	AK	AR
LE 148J 03									3.000	76.20	123.900	2.2130	3.826	97.18	AK	AW
LE 148J 04									3.500	88.90	92.900	1.6590	4.602	116.89	AM	AX
LE 148J 05									4.000	101.60	71.900	1.2840	5.424	137.77	AP	AZA
LE 148J 06									4.500	114.30	58.700	1.0480	6.244	158.60	AS	AZB
LE 148J 07									5.000	127.00	49.600	0.8860	7.064	179.43	AW	AZD
LE 148J 08									5.500	139.70	43.700	0.7800	7.843	199.21	AX	AZF
LE 148J 09									6.000	152.40	38.500	0.6880	8.659	219.94	AZ	AZG
LE 148J 10									6.500	165.10	34.300	0.6130	9.485	240.92	AZA	AZG
LE 148J 11									7.000	177.80	31.000	0.5540	10.302	261.67	AZB	AZH
LE 148J 12									8.000	203.20	26.200	0.4680	11.907	302.44	AZC	AZK
LE 148J 13									9.000	228.60	22.500	0.4020	13.550	344.17	AZD	AZM
LE 085JK 01	1.125	28.58	.085	2.16	20.97	9.500	1.89	.860	3.000	76.20	7.000	0.1250	5.730	145.54	AE	AP
LE 085JK 02									3.500	88.90	4.300	0.0770	7.940	201.68	AJ	AS
LE 085JK 03									4.000	101.60	3.100	0.0550	10.160	258.06	AK	AW
LE 085JK 04									4.500	114.30	2.500	0.0450	12.140	308.36	AL	AZ
LE 085JK 05									5.000	127.00	2.000	0.0360	14.560	369.82	AM	AZB
LE 085JK 06									5.500	139.70	1.700	0.0300	16.740	425.20	AN	AZC
LE 085JK 07									6.000	152.40	1.500	0.0270	18.740	476.00	AP	AZD
LE 085JK 08									6.500	165.10	1.300	0.0230	21.200	538.48	AR	AZF
LE 085JK 09									7.000	177.80	1.200	0.0210	22.930	582.42	AS	AZH
LE 105JK 01	1.125	28.58	.105	2.67	37.80	17.200	3.40	1.550	3.000	76.20	19.600	0.3510	4.760	120.90	AG	AR
LE 105JK 02									3.500	88.90	12.500	0.2240	6.250	158.75	AJ	AT
LE 105JK 03									4.000	101.60	9.200	0.1650	7.740	196.60	AL	AX
LE 105JK 04									4.500	114.30	7.300	0.1310	9.210	233.93	AM	AZA
LE 105JK 05									5.000	127.00	6.000	0.1070	10.730	272.54	AN	AZC
LE 105JK 06									5.500	139.70	5.100	0.0910	12.250	311.15	AP	AZD
LE 105JK 07									6.000	152.40	4.500	0.0810	13.640	346.46	AR	AZE
LE 105JK 08									6.500	165.10	3.900	0.0700	15.320	389.13	AS	AZG
LE 105JK 09									7.000	177.80	3.500	0.0630	16.830	427.48	AT	AZJ
LE 125JK 01	1.125	28.58	.125	3.18	59.60	27.029	5.51	2.499	3.000	76.20	46.200	0.8250	4.171	105.94	AJ	AS
LE 125JK 02									3.500	88.90	30.300	0.5410	5.285	134.24	AK	AU
LE 125JK 03									4.000	101.60	22.500	0.4020	6.404	162.66	AM	AY
LE 125JK 04									4.500	114.30	17.900	0.3200	7.522	191.06	AN	AZB
LE 125JK 05									5.000	127.00	14.900	0.2660	8.630	219.20	AO	AZD
LE 125JK 06									5.500	139.70	12.700	0.2270	9.759	247.88	AR	AZE
LE 125JK 07									6.000	152.40	11.100	0.1980	10.873	276.17	AS	AZF
LE 125JK 08									6.500	165.10	9.900	0.1770	11.964	303.89	AT	AZH
LE 125JK 09									7.000	177.80	8.900	0.1590	13.077	332.16	AU	AZK

SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	M	S
LE 095K 01	1.250	31.75	.095	2.41	26.00	11.794	2.35	1.066	3.250	82.55	7.280	0.1300	6.500	165.10	AG	AR
LE 095K 02									3.500	88.90	5.860	0.1050	7.540	191.52	AJ	AT
LE 095K 03									4.000	101.60	4.330	0.0750	9.600	243.84	AL	AX
LE 095K 04									4.500	114.30	3.300	0.0590	11.670	296.42	AM	AZA
LE 095K 05									5.000	127.00	2.710	0.0480	13.730	348.74	AN	AZC
LE 095K 06									5.500	139.70	2.300	0.0410	15.780	400.81	AP	AZD
LE 095K 07									6.000	152.40	1.990	0.0360	17.880	454.15	AR	AZE
LE 095K 08									6.500	165.10	1.760	0.0310	19.940	506.48	AS	AZE
LE 095K 09									7.000	177.80	1.570	0.0280	22.060	560.32	AT	AZJ
LE 095K 10									7.500	190.50	1.430	0.0260	24.040	610.62	AU	AZK
LE 115K 01	1.250	31.75	.115	2.92	45.00	20.400	4.25	1.928	3.250	82.55	18.060	0.3220	5.510	139.95	AN	AW
LE 115K 02									3.500	88.90	14.700	0.2620	6.270	159.26	AN	AY
LE 115K 03									4.000	101.60	10.720	0.1910	7.800	198.12	AP	AZ
LE 115K 04									4.500	114.30	8.430	0.1500	9.330	236.98	AR	AZB
LE 115K 05									5.000	127.00	6.950	0.1240	10.860	275.84	AS	AZC
LE 115K 06									5.500	139.70	5.910	0.1060	12.400	314.96	AU	AZE
LE 115K 07									6.000	152.40	5.140	0.0920	13.930	353.82	AX	AZF
LE 115K 08									6.500	165.10	4.550	0.0810	15.460	392.68	AY	AZH
LE 115K 09									7.000	177.80	4.080	0.0730	16.990	431.55	AZ	AZK
LE 115K 10									7.500	190.50	3.700	0.0660	18.510	470.15	AZA	AZL
LE 135K 01	1.250	31.75	.135	3.43	65.00	29.480	6.20	2.800	3.250	82.55	40.500	0.7230	4.700	119.38	AR	AZA
LE 135K 02									3.500	88.90	34.400	0.6140	5.210	132.33	AS	AZB
LE 135K 03									4.000	101.60	25.500	0.4550	6.310	160.27	AT	AZB
LE 135K 04									4.500	114.30	19.700	0.3520	7.480	189.99	AU	AZC
LE 135K 05									5.000	127.00	16.400	0.2930	8.590	218.19	AX	AZC
LE 135K 06									5.500	139.70	13.600	0.2430	9.820	249.43	AZ	AZF
LE 135K 07									6.000	152.40	11.900	0.2120	10.940	277.88	AZB	AZG
LE 135K 08									6.500	165.10	10.600	0.1890	12.050	306.07	AZC	AZH
LE 135K 09									7.000	177.80	9.500	0.1700	13.190	335.03	AZD	AZJ
LE 135K 10									7.500	190.50	8.600	0.1540	14.340	364.24	AZE	AZK
LE 125L 01	1.500	38.10	.125	3.18	45.00	20.400	4.20	1.900	4.500	114.30	9.000	0.1610	9.030	229.36	AX	AZC
LE 125L 02									5.000	127.00	7.100	0.1270	10.750	273.05	AY	AZD
LE 125L 03									5.500	139.70	5.870	0.1050	12.450	316.23	AZA	AZE
LE 125L 04									6.000	152.40	5.000	0.0890	14.160	359.66	AZB	AZF
LE 125L 05									6.500	165.10	4.350	0.0780	15.880	403.35	AZC	AZH
LE 125L 06									7.000	177.80	3.860	0.0690	17.570	446.28	AZD	AZJ
LE 125L 07									7.500	190.50	3.460	0.0620	19.290	489.97	AZE	AZL
LE 125L 08									8.000	203.20	3.140	0.0560	20.990	533.15	AZF	AZM
LE 148L 01	1.500	38.10	.148	3.76	70.63	32.032	6.70	3.039	4.500	114.30	24.300	0.4340	7.131	181.13	AY	AZD
LE 148L 02									5.000	127.00	18.700	0.3340	8.419	213.84	AZ	AZE
LE 148L 03									5.500	139.70	15.300	0.2730	9.678	245.82	AZB	AZF
LE 148L 04									6.000	152.40	12.900	0.2300	10.956	278.28	AZC	AZG
LE 148L 05									6.500	165.10	11.200	0.2000	12.208	310.08	AZD	AZJ
LE 148L 06									7.000	177.80	9.800	0.1750	13.523	343.48	AZE	AZK
LE 148L 07									7.500	190.50	8.800	0.1570	14.765	375.03	AZF	AZM
LE 148L 08									8.000	203.20	7.900	0.1410	16.092	408.74	AZG	AZN

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB./IN.	KG/MM	IN.	MM	M	S
LE 177L 01	1.500	38.10	.177	4.50	120.96	54.857	10.97	4.975	4.500	114.30	59.900	1.0700	6.336	160.93	AZ	AZE
LE 177L 02									5.000	127.00	46.900	0.8380	7.345	186.56	AZA	AZF
LE 177L 03									5.500	139.70	38.500	0.6880	8.357	212.27	AZC	AZG
LE 177L 04									6.000	152.40	32.700	0.5840	9.364	237.85	AZD	AZH
LE 177L 05									6.500	165.10	28.400	0.5070	10.373	263.47	AZE	AZK
LE 177L 06									7.000	177.80	25.100	0.4480	11.382	289.10	AZF	AZL
LE 177L 07									7.500	190.50	22.500	0.4020	12.388	314.66	AZG	AZN
LE 177L 08									8.000	203.20	20.300	0.3630	13.418	340.82	AZH	AZO
LE 148N 01	1.750	44.45	.148	3.76	64.33	29.175	5.79	2.626	5.000	127.00	15.000	0.2680	8.903	226.14	AZA	AZF
LE 148N 02									5.500	139.70	11.500	0.2050	10.590	268.99	AZC	AZG
LE 148N 03									6.000	152.40	9.400	0.1680	12.228	310.59	AZD	AZH
LE 148N 04									6.500	165.10	7.900	0.1410	13.910	353.31	AZE	AZK
LE 148N 05									7.000	177.80	6.800	0.1210	15.609	396.47	AZF	AZL
LE 148N 06									7.500	190.50	6.000	0.1070	17.256	438.30	AZG	AZN
LE 148N 07									8.000	203.20	5.300	0.0950	19.045	483.74	AZH	AZO
LE 148N 08									9.000	228.60	4.400	0.0790	22.304	566.52	AZJ	AZP
LE 177N 01	1.750	44.45	.177	4.50	105.51	47.850	9.50	4.308	5.000	127.00	36.600	0.6540	7.623	193.62	AZA	AZF
LE 177N 02									5.500	139.70	28.500	0.5090	8.869	225.27	AZC	AZG
LE 177N 03									6.000	152.40	23.300	0.4160	10.121	257.07	AZD	AZH
LE 177N 04									6.500	165.10	19.700	0.3520	11.374	288.90	AZE	AZK
LE 177N 05									7.000	177.80	17.100	0.3050	12.615	320.42	AZF	AZL
LE 177N 06									7.500	190.50	15.100	0.2700	13.858	351.99	AZG	AZN
LE 177N 07									8.000	203.20	13.500	0.2410	15.112	383.84	AZH	AZO
LE 177N 08									9.000	228.60	11.200	0.2000	17.572	446.33	AZJ	AZP
LE 207N 01	1.750	44.45	.207	5.26	162.55	73.719	14.59	6.617	5.000	127.00	80.200	1.4320	6.845	173.86	AZB	AZG
LE 207N 02									5.500	139.70	63.200	1.1290	7.841	199.16	AZD	AZH
LE 207N 03									6.000	152.40	52.100	0.9300	8.840	224.54	AZE	AZJ
LE 207N 04									6.500	165.10	44.300	0.7910	9.840	249.94	AZF	AZL
LE 207N 05									7.000	177.80	38.600	0.6890	10.833	275.16	AZG	AZM
LE 207N 06									7.500	190.50	34.200	0.6110	11.826	300.38	AZH	AZO
LE 207N 07									8.000	203.20	30.600	0.5460	12.835	326.01	AZJ	AZP
LE 207N 08									9.000	228.60	25.400	0.4540	14.825	376.56	AZK	AZQ
LE 177P 01	2.000	50.80	.177	4.50	92.95	42.154	8.37	3.796	5.500	139.70	24.200	0.4320	8.995	228.47	AZD	AZH
LE 177P 02									6.000	152.40	18.700	0.3340	10.523	267.28	AZE	AZJ
LE 177P 03									6.500	165.10	15.300	0.2730	12.028	305.51	AZF	AZL
LE 177P 04									7.000	177.80	12.900	0.2300	13.557	344.35	AZG	AZM
LE 177P 05									7.500	190.50	11.100	0.1980	15.120	384.05	AZH	AZO
LE 177P 06									8.000	203.20	9.800	0.1750	16.631	422.43	AZJ	AZP
LE 177P 07									9.000	228.60	7.900	0.1410	19.706	500.53	AZK	AZQ
LE 177P 08									10.000	254.00	6.600	0.1180	22.815	579.50	AZL	AZR

SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (INCH)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	IN.	MM	IN.	MM	LB.	KG	LB.	KG	IN.	MM	LB/IN.	KG/MM	IN.	MM	Music Wire	302 Stainless*
LE 207P 01	2.000	50.80	.207	5.26	143.12	64.907	12.88	5.841	5.500	139.70	52.500	0.9380	7.981	202.72	AZE	AZJ
LE 207P 02									6.000	152.40	41.100	0.7340	9.169	232.89	AZF	AZL
LE 207P 03									6.500	165.10	33.800	0.6040	10.353	262.97	AZG	AZM
LE 207P 04									7.000	177.80	28.700	0.5130	11.538	293.07	AZH	AZO
LE 207P 05									7.500	190.50	24.900	0.4450	12.731	323.37	AZJ	AZP
LE 207P 06									8.000	203.20	22.000	0.3930	13.920	353.57	AZK	AZQ
LE 207P 07									9.000	228.60	17.900	0.3200	16.276	413.41	AZL	AZR
LE 207P 08									10.000	254.00	15.000	0.2680	18.683	474.55	AZM	AZS

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.


PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

SEARCH AND SHOP ONLINE... for Lee Stock Springs.

www.leespring.com offers a secure, simple, four-step eCommerce process to place orders for Lee Stock Springs using either a credit card or an open account. Orders can be processed from 10 up to 1000 pieces of each item and quickly shipped **FREE** via ground service. For rush orders you can select premium shipping services, such as FedEx Overnight. Shipping fees for these premium services can be charged to a credit card or added to your invoice.

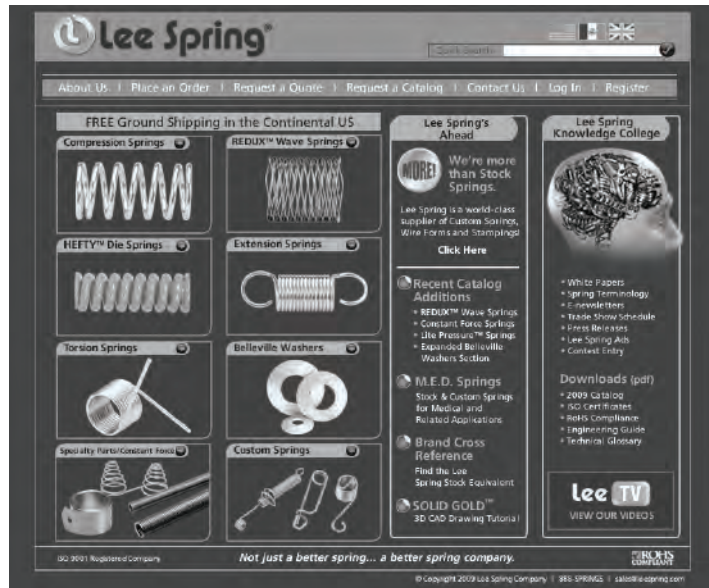

Finding and ordering springs has never been easier:

STEP 1 Log on to www.leespring.com.

STEP 2 Choose the parts you need (including many items that are only available at leespring.com).

Lee Spring has designed four easy ways to find the parts you need. Take your pick...

- | | |
|---------------------------------|--|
| Shop by Part Number: | If you know the Lee Spring part number. |
| Shop by Specification: | To find Lee Stock item(s) that match your specific needs. |
| Shop by Catalog: | To browse through the online catalog of all Lee Spring parts. |
| Shop by Cross-Reference: | If you know the stock code from another spring catalog. Click on your selection to get detailed specifications, CAD downloads and pricing. |

STEP 3 Review, Change and/or Save and Order.

STEP 4 Check Out.

Ordering springs couldn't be any easier!

Should your needs exceed 1000 pieces, you can submit an online Request for Quote through leespring.com or contact Customer Service at (888) SPRINGS (888-777-4647) for personal service and prompt response.

EXTENSION SPRINGS: STANDARD SERIES (METRIC)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	MM	IN.	MM	IN.	N	LB.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	Music Wire	302 Stainless*
LEM035A 01	3.00	.118	.35	.014	4.90	1.10	.53	.12	12.50	0.492	.387	2.21	11.26	0.443	K	K
LEM035A 02									14.00	0.551	.322	1.84	13.53	0.533	K	K
LEM035A 03									15.50	0.610	.277	1.58	15.75	0.620	K	K
LEM035A 04									17.00	0.669	.242	1.38	18.04	0.710	K	K
LEM035A 05									19.00	0.748	.208	1.19	20.92	0.824	K	K
LEM035A 06									21.00	0.827	.182	1.04	23.93	0.942	K	K
LEM035A 07									23.00	0.906	.161	0.92	27.06	1.065	K	K
LEM035A 08									25.00	0.984	.145	0.83	29.99	1.181	K	K
LEM035A 09									30.00	1.181	.117	0.67	37.15	1.463	L	L
LEM035A 10									35.00	1.378	.096	0.55	45.26	1.782	L	L
LEM035A 11									40.00	1.575	.084	0.48	51.86	2.042	L	L
LEM045B 01	4.50	.177	.45	.018	6.85	1.54	.62	.14	15.50	0.610	.366	2.09	17.01	0.670	J	J
LEM045B 02									17.00	0.669	.306	1.75	20.32	0.800	J	J
LEM045B 03									19.00	0.748	.252	1.44	24.69	0.972	J	J
LEM045B 04									21.00	0.827	.215	1.23	28.91	1.138	J	J
LEM045B 05									23.00	0.906	.187	1.07	33.23	1.308	J	J
LEM045B 06									25.00	0.984	.166	0.95	37.43	1.474	J	J
LEM045B 07									30.00	1.181	.128	0.73	48.71	1.918	J	J
LEM045B 08									35.00	1.378	.105	0.60	59.27	2.333	J	J
LEM045B 09									40.00	1.575	.089	0.51	69.73	2.745	K	K
LEM045B 10									45.00	1.772	.077	0.44	80.82	3.182	K	K
LEM045B 11									50.00	1.969	.068	0.39	91.18	3.590	K	K
LEM045B 12									55.00	2.165	.061	0.35	101.60	4.000	L	L
LEM045B 13									60.00	2.362	.054	0.31	114.71	4.516	L	L
LEM060B 01	4.50	.177	.60	.024	15.70	3.53	1.87	.42	15.50	0.610	1.632	9.32	8.48	0.334	J	J
LEM060B 02									17.00	0.669	1.384	7.90	10.00	0.394	J	J
LEM060B 03									19.00	0.748	1.149	6.56	12.04	0.474	J	J
LEM060B 04									21.00	0.827	.982	5.61	14.08	0.554	J	J
LEM060B 05									23.00	0.906	.858	4.90	16.12	0.635	J	J
LEM060B 06									25.00	0.984	.762	4.35	18.16	0.715	J	J
LEM060B 07									30.00	1.181	.594	3.39	23.30	0.917	J	J
LEM060B 08									35.00	1.378	.487	2.78	28.42	1.119	J	J
LEM060B 09									40.00	1.575	.413	2.36	33.47	1.318	J	J
LEM060B 10									45.00	1.772	.359	2.05	38.53	1.517	J	J
LEM060B 11									50.00	1.969	.317	1.81	43.64	1.718	J	J
LEM060B 12									55.00	2.165	.284	1.62	48.76	1.920	J	J
LEM060B 13									60.00	2.362	.257	1.47	53.74	2.116	J	J

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (METRIC)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

EXTENSION SPRINGS

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	MM	IN.	MM	IN.	N	LB.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	Music Wire	302 Stainless*
LEM055C 01	6.30	.248	.55	.022	8.80	1.98	.85	.19	15.50	0.610	.602	3.44	13.22	0.520	J	J
LEM055C 02									19.00	0.748	.340	1.94	23.44	0.923	J	J
LEM055C 03									22.00	0.866	.247	1.41	32.25	1.270	J	J
LEM055C 04									25.00	0.984	.194	1.11	40.96	1.613	J	J
LEM055C 05									30.00	1.181	.144	0.82	55.45	2.183	J	J
LEM055C 06									35.00	1.378	.114	0.65	69.95	2.754	K	K
LEM055C 07									40.00	1.575	.095	0.54	84.20	3.315	K	K
LEM055C 08									45.00	1.772	.081	0.46	98.84	3.891	K	K
LEM055C 09									50.00	1.969	.070	0.40	113.67	4.475	K	K
LEM055C 10									55.00	2.165	.061	0.35	129.90	5.114	K	K
LEM055C 11									60.00	2.362	.056	0.32	142.08	5.594	K	K
LEM055C 12									65.00	2.559	.051	0.29	156.78	6.172	K	K
LEM075C 01	6.30	.248	.75	.030	19.60	4.41	2.45	.55	15.50	0.610	2.786	15.91	6.16	0.243	J	J
LEM075C 02									19.00	0.748	1.658	9.47	10.35	0.408	J	J
LEM075C 03									22.00	0.866	1.231	7.03	13.95	0.549	J	J
LEM075C 04									25.00	0.984	.979	5.59	17.54	0.691	J	J
LEM075C 05									30.00	1.181	.730	4.17	23.51	0.926	J	J
LEM075C 06									35.00	1.378	.581	3.32	29.53	1.163	J	J
LEM075C 07									40.00	1.575	.483	2.76	35.52	1.399	K	K
LEM075C 08									45.00	1.772	.415	2.37	41.37	1.629	K	K
LEM075C 09									50.00	1.969	.363	2.07	47.36	1.865	K	K
LEM075C 10									55.00	2.165	.322	1.84	53.28	2.098	K	K
LEM075C 11									60.00	2.362	.289	1.65	59.42	2.339	K	K
LEM075C 12									65.00	2.559	.263	1.50	65.36	2.573	K	K
LEM080C 01	6.30	.248	.80	.031	24.50	5.51	3.25	.73	15.50	0.610	3.842	21.94	5.53	0.218	J	J
LEM080C 02									19.00	0.748	2.313	13.21	9.19	0.362	J	J
LEM080C 03									22.00	0.866	1.725	9.85	12.33	0.485	J	J
LEM080C 04									25.00	0.984	1.377	7.86	15.45	0.608	J	J
LEM080C 05									30.00	1.181	1.028	5.87	20.68	0.814	J	J
LEM080C 06									35.00	1.378	.821	4.69	25.89	1.019	J	J
LEM080C 07									40.00	1.575	.683	3.90	31.13	1.226	J	J
LEM080C 08									45.00	1.772	.585	3.34	36.35	1.431	J	J
LEM080C 09									50.00	1.969	.511	2.92	41.58	1.637	J	J
LEM080C 10									55.00	2.165	.455	2.60	46.70	1.838	K	K
LEM080C 11									60.00	2.362	.408	2.33	52.11	2.052	K	K
LEM080C 12									65.00	2.559	.371	2.12	57.27	2.255	K	K
LEM080C 13									70.00	2.756	.340	1.94	62.58	2.464	K	K
LEM080C 14									75.00	2.953	.313	1.79	67.83	2.670	K	K
LEM075CD 01	8.00	.315	.75	.030	16.70	3.75	1.65	.37	25.00	0.984	.573	3.27	26.25	1.034	G	G
LEM075CD 02									30.00	1.181	.396	2.26	37.99	1.496	G	G
LEM075CD 03									35.00	1.378	.303	1.73	49.63	1.954	G	G
LEM075CD 04									40.00	1.575	.245	1.40	61.32	2.414	G	G
LEM075CD 05									45.00	1.772	.207	1.18	72.76	2.864	J	J
LEM075CD 06									50.00	1.969	.177	1.01	85.00	3.347	K	K
LEM075CD 07									55.00	2.165	.156	0.89	96.46	3.798	K	K
LEM075CD 08									60.00	2.362	.138	0.79	108.67	4.278	K	K
LEM075CD 09									65.00	2.559	.126	0.72	119.24	4.694	K	K

SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (METRIC)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	MM	IN.	MM	IN.	N	LB.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	M	S
LEM095D 01	9.50	.374	.95	.037	26.00	5.84	3.15	.71	19.00	0.748	4.492	25.65	5.08	0.200	G	G
LEM095D 02									22.00	0.866	2.187	12.49	10.43	0.411	G	G
LEM095D 03									25.00	0.984	1.447	8.26	15.78	0.621	G	G
LEM095D 04									30.00	1.181	.925	5.28	24.68	0.972	G	G
LEM095D 05									35.00	1.378	.680	3.88	33.58	1.322	G	G
LEM095D 06									40.00	1.575	.536	3.06	42.58	1.676	J	J
LEM095D 07									45.00	1.772	.443	2.53	51.50	2.028	J	J
LEM095D 08									50.00	1.969	.378	2.16	60.33	2.375	K	K
LEM095D 09									55.00	2.165	.329	1.88	69.31	2.729	K	L
LEM095D 10									60.00	2.362	.292	1.67	78.03	3.072	K	L
LEM095D 11									65.00	2.559	.263	1.50	86.87	3.420	K	L
LEM095D 12									70.00	2.756	.238	1.36	95.81	3.772	K	L
LEM120D 01	9.50	.374	1.20	.047	54.00	12.14	6.85	1.54	25.00	0.984	4.686	26.76	10.06	0.396	G	G
LEM120D 02									30.00	1.181	3.082	17.60	15.30	0.602	G	G
LEM120D 03									35.00	1.378	2.296	13.11	20.54	0.809	G	G
LEM120D 04									40.00	1.575	1.828	10.44	25.79	1.015	G	G
LEM120D 05									45.00	1.772	1.520	8.68	31.02	1.221	J	J
LEM120D 06									50.00	1.969	1.301	7.43	36.24	1.427	J	K
LEM120D 07									55.00	2.165	1.137	6.49	41.49	1.633	K	L
LEM120D 08									60.00	2.362	1.009	5.76	46.74	1.840	L	M
LEM120D 09									70.00	2.756	.825	4.71	57.16	2.251	L	M
LEM120D 10									80.00	3.150	.697	3.98	67.65	2.663	L	M
LEM120D 11									90.00	3.543	.602	3.44	78.27	3.081	M	N
LEM120D 12									100.00	3.937	.532	3.04	88.57	3.487	M	N
LEM120D 13									115.00	4.528	.452	2.58	104.36	4.109	N	P
LEM150D 01	9.50	.374	1.50	.059	98.00	22.05	14.70	3.30	25.00	0.984	14.604	83.39	5.71	0.225	L	M
LEM150D 02									30.00	1.181	9.893	56.49	8.43	0.332	L	M
LEM150D 03									35.00	1.378	7.480	42.71	11.15	0.439	L	M
LEM150D 04									40.00	1.575	6.014	34.34	13.87	0.546	L	M
LEM150D 05									45.00	1.772	5.028	28.71	16.59	0.653	L	M
LEM150D 06									50.00	1.969	4.320	24.67	19.30	0.760	L	M
LEM150D 07									55.00	2.165	3.786	21.62	22.03	0.867	M	N
LEM150D 08									60.00	2.362	3.370	19.24	24.75	0.975	P	R
LEM150D 09									70.00	2.756	2.764	15.78	30.18	1.188	P	R
LEM150D 10									80.00	3.150	2.341	13.37	35.62	1.402	R	S
LEM120E 01	12.50	.492	1.20	.047	39.20	8.82	3.90	.88	30.00	1.181	2.074	11.84	17.03	0.671	K	L
LEM120E 02									40.00	1.575	.958	5.47	36.87	1.452	K	L
LEM120E 03									50.00	1.969	.623	3.56	56.65	2.230	L	M
LEM120E 04									55.00	2.165	.531	3.03	66.56	2.620	L	M
LEM120E 05									60.00	2.362	.462	2.64	76.39	3.008	N	P
LEM120E 06									65.00	2.559	.410	2.34	86.19	3.393	N	P
LEM120E 07									70.00	2.756	.366	2.09	96.50	3.799	N	P
LEM120E 08									80.00	3.150	.305	1.74	115.91	4.563	N	P
LEM120E 09									90.00	3.543	.259	1.48	136.27	5.365	P	R
LEM120E 10									100.00	3.937	.228	1.30	155.14	6.108	P	R

EXTENSION SPRINGS



SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

EXTENSION SPRINGS: STANDARD SERIES (METRIC)

LOOPS AT RANDOM POSITION • Music Wire (Plated or Pretinned) or Stainless Steel (Passivated)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		MAXIMUM LOAD		INITIAL TENSION		FREE LENGTH		SPRING RATE		MAXIMUM EXTENDED LENGTH		PRICE GROUP	
	MM	IN.	MM	IN.	N	LB.	N	LB.	MM	IN.	N/MM	LB/IN.	MM	IN.	Music Wire	302 Stainless*
LEM160E 01	12.50	.492	1.60	.063	88.25	19.84	11.80	2.65	30.00	1.181	8.543	48.78	8.95	0.352	L	M
LEM160E 02									35.00	1.378	5.657	32.30	13.52	0.532	L	M
LEM160E 03									40.00	1.575	4.228	24.14	18.09	0.712	L	M
LEM160E 04									45.00	1.772	3.377	19.28	22.65	0.892	L	M
LEM160E 05									50.00	1.969	2.809	16.04	27.22	1.072	L	M
LEM160E 06									55.00	2.165	2.406	13.74	31.78	1.251	L	R
LEM160E 07									60.00	2.362	2.103	12.01	36.36	1.432	L	R
LEM160E 08									65.00	2.559	1.869	10.67	40.92	1.611	M	R
LEM160E 09									70.00	2.756	1.681	9.60	45.48	1.791	P	S
LEM160E 10									80.00	3.150	1.399	7.99	54.65	2.151	R	T
LEM160E 11									90.00	3.543	1.200	6.85	63.74	2.509	R	W
LEM160E 12									100.00	3.937	1.049	5.99	72.89	2.870	S	X
LEM160E 13									115.00	4.528	.883	5.04	86.63	3.411	T	Z
LEM160G 01	19.00	.748	1.60	.063	56.90	12.79	5.40	1.21	50.00	1.969	1.224	6.99	42.08	1.657	N	S
LEM160G 02									55.00	2.165	.944	5.39	54.57	2.148	P	U
LEM160G 03									60.00	2.362	.767	4.38	67.15	2.644	P	W
LEM160G 04									65.00	2.559	.648	3.70	79.50	3.130	P	W
LEM160G 05									70.00	2.756	.559	3.19	92.20	3.630	R	X
LEM160G 06									80.00	3.150	.440	2.51	117.18	4.614	R	Z
LEM160G 07									90.00	3.543	.363	2.07	142.09	5.594	T	AC
LEM160G 08									100.00	3.937	.308	1.76	167.12	6.580	U	AD
LEM160G 09									115.00	4.528	.252	1.44	204.26	8.042	W	AJ
LEM160G 10									130.00	5.118	.212	1.21	243.08	9.570	Y	AU
LEM160G 11									145.00	5.709	.184	1.05	280.13	11.029	Y	AU

SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

Lee's Stock Torsion Springs have been carefully designed to represent the most commonly used specifications.

For your convenience and ease of selection, the Torsion Spring section is divided into four categories by Free Position of Legs (90°, 180°, 270°, 360°).

Both left-hand and right-hand wound Lee Stock Numbers are shown.

GENERAL NOTES

1. Lengths of legs are shown as "A" in sketches below.
2. It is to be noted that "R" (radius in inches) where force is applied is always 1/2 of "A" (Length of Leg). Dotted lines of legs show loaded position where values of "T" (Torque) will be achieved at "R" (Radius).
3. To translate torque values to direct load:

Use Formula $P=T/R$

P = Load applied at Radius (R)

T = Torque

Example: Part LTL 012 A 01

What is the load where R = .187?


Using $P = T/R = .050/.187 = .267\text{lbs.}$

4. To calculate torque values other than those listed, a direct proportion may be used.

Example: Part LTL 012 A 01

Torque shown in catalog listing is .250 inch/lbs. for 180° deflection; therefore, torque at 90° deflection would be .125 inch/lbs.

5. Inspection of Load – Loads should always be checked at the Radius ("R" value).

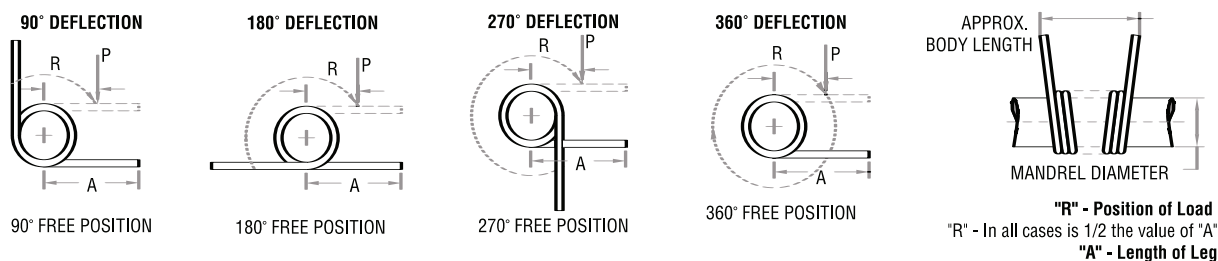

SPECIAL INSTRUCTIONS FOR EXTENSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

TORSION SPRINGS

Music Wire (Plated) or Stainless Steel (Passivated), LTL - Left Hand Wound; LTR - Right Hand Wound

SPECIFICATIONS

Material: Music Wire
302 Stainless Steel

Plating: Zinc Plated .0002" (ASTM B-633)

Passivation: (ASTM A-967) (Mil. Spec. No. QQ-P-35)

**Tolerances
on Torque:** $\pm 10\%$

Tolerances on Outside Diameter

Inches				Millimeters			
.093"	—	.125"	$\pm .004"$	2.36	—	3.17	$\pm .10\text{mm}$
.126"	—	.200"	$\pm .005"$	3.18	—	5.08	$\pm .13\text{mm}$
.201"	—	.300"	$\pm .007"$	5.09	—	7.62	$\pm .18\text{mm}$
.301"	—	.410"	$\pm .010"$	7.63	—	10.41	$\pm .26\text{mm}$
.411"	—	.500"	$\pm .013"$	10.42	—	12.70	$\pm .33\text{mm}$
.501"	—	.700"	$\pm .015"$	12.71	—	17.78	$\pm .38\text{mm}$
.701"	—	.875"	$\pm .020"$	17.79	—	22.23	$\pm .51\text{mm}$
.876"	—	1.125"	$\pm .025"$	22.24	—	28.58	$\pm .64\text{mm}$
1.126"	—	1.218"	$\pm .030"$	28.59	—	30.94	$\pm .76\text{mm}$
1.219"	—	1.250"	$\pm .035"$	30.95	—	31.75	$\pm .89\text{mm}$

Tolerances on Free Position:

From 3 to 10 total coils (Incl.) $\pm 10^\circ$

From 11 to 20 total coils (Incl.) $\pm 15^\circ$

MANDREL SIZE

Generally, torsion springs are used over a mandrel (shaft or arbor). The column "Suggested Mandrel Size, Inches", allows approximately a 10% clearance for the various deflections shown in examples below. If you require greater deflections, we suggest a suitable reduction in the mandrel size.

DIRECTION OF WIND

Good design dictates that torsion springs should be used in the direction that winds the coil. When ordering be sure to choose either **LTL** (Left Hand Wound) or **LTR** (Right Hand Wound) for required application.



SPECIAL INSTRUCTIONS FOR TORSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

TORSION SPRINGS: 90° FREE POSITION

Music Wire (Plated) or Stainless Steel (Passivated), LTL - Left Hand Wound; LTR - Right Hand Wound

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		TORQUE @ 90° DEFLECTION (T)		RADIUS (R)		SUGGESTED MANDREL SIZE		LENGTH OF LEG (A)		BODY LENGTH APPROX. (L)		NUMBER OF COILS	PRICE GROUP	
	IN.	MM	IN.	MM	IN.-LB.	KG-MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM		Music Wire	302 Stainless*
LTL012A 01 LTR012A 01	.105	2.67	.012	.30	.050	.58	.187	4.75	1/16 (.063)	1.59	0.375	9.53	0.054	1.37	3.25	G	J
LTL015B 01 LTR015B 01	.111	2.82	.015	.38	.100	1.15	.250	6.35			0.500	12.70	0.068	1.73	3.25	G	J
LTL014A 01 LTR014A 01	.124	3.15	.014	.36	.075	.86	.250	6.35			0.500	12.70	0.065	1.65	3.25	G	J
LTL012A 07 LTR012A 07	.146	3.72	.012	.30	.050	.58	.250	6.35	3/32 (.094)	2.38	0.500	12.70	0.039	0.99	2.25	G	J
LTL017C 01 LTR017C 01	.160	4.06	.017	.43	.125	1.44	.250	6.35			0.500	12.70	0.077	1.96	3.25	G	J
LTL015B 07 LTR015B 07	.171	4.35	.015	.38	.100	1.15	.250	6.35			0.500	12.70	0.049	1.24	2.25	G	J
LTL014A 07 LTR014A 07	.172	4.37	.014	.36	.075	.86	.250	6.35	1/8 (.125)	3.18	0.500	12.70	0.046	1.16	2.25	G	J
LTL018C 01 LTR018C 01	.178	4.52	.018	.46	.150	1.73	.250	6.35			0.500	12.70	0.080	2.03	3.25	G	J
LTL020D 01 LTR020D 01	.191	4.85	.020	.51	.200	2.30	.375	9.53			0.750	19.05	0.090	2.29	3.25	G	J
LTL021D 01 LTR021D 01	.200	5.08	.021	.53	.250	2.88	.375	9.53	9/64 (.141)	3.57	0.750	19.05	0.095	2.41	3.25	G	J
LTL023D 01 LTR023D 01	.204	5.18	.023	.58	.330	3.80	.375	9.53			0.750	19.05	0.103	2.62	3.25	G	J
LTL017C 07 LTR017C 07	.223	5.67	.017	.43	.125	1.44	.375	9.53	5/32 (.156)	3.97	0.750	19.05	0.055	1.40	2.25	G	J
LTL018C 07 LTR018C 07	.234	5.94	.018	.46	.150	1.73	.375	9.53			0.750	19.05	0.059	1.49	2.25	G	J
LTL025E 01 LTR025E 01	.236	5.99	.025	.64	.420	4.84	.375	9.53			0.750	19.05	0.110	2.79	3.25	G	J
LTL021D 07 LTR021D 07	.261	6.63	.021	.53	.250	2.88	.500	12.70	3/16 (.188)	4.76	1.000	25.40	0.068	1.73	2.25	G	J
LTL020D 07 LTR020D 07	.267	6.78	.020	.51	.200	2.30	.500	12.70			1.000	25.40	0.065	1.65	2.25	G	J
LTL028E 01 LTR028E 01	.267	6.78	.028	.71	.550	6.34	.500	12.70			1.000	25.40	0.125	3.18	3.25	J	K
LTL023D 07 LTR023D 07	.285	7.23	.023	.58	.330	3.80	.500	12.70			1.000	25.40	0.075	1.90	2.25	G	J
LTL032F 01 LTR032F 01	.288	7.32	.032	.81	.875	10.08	.500	12.70			1.000	25.40	0.145	3.68	3.25	J	K
LTL030F 01 LTR030F 01	.305	7.75	.030	.76	.680	7.83	.500	12.70	7/32 (.219)	5.56	1.000	25.40	0.132	3.35	3.25	J	K
LTL025E 07 LTR025E 07	.312	7.93	.025	.64	.420	4.84	.500	12.70			1.000	25.40	0.081	2.06	2.25	J	K
LTL035G 01 LTR035G 01	.316	8.03	.035	.89	1.070	12.33	.625	15.88			1.250	31.75	0.153	3.89	3.25	J	K
LTL040H 01 LTR040H 01	.335	8.51	.040	1.02	1.500	17.28	.625	15.88			1.250	31.75	0.220	5.59	4.25	K	L

TORSION SPRINGS



SPECIAL INSTRUCTIONS FOR TORSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

TORSION SPRINGS: 90° FREE POSITION

Music Wire (Plated) or Stainless Steel (Passivated), LTL - Left Hand Wound; LTR - Right Hand Wound

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		TORQUE @ 90° DEFLECTION (T)		RADIUS (R)		SUGGESTED MANDREL SIZE		LENGTH OF LEG (A)		BODY LENGTH APPROX. (L)		NUMBER OF COILS	PRICE GROUP	
	IN.	MM	IN.	MM	IN.-LB.	KG-MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM		Music Wire M	302 Stainless* S
LTL045H 01 LTR045H 01	.356	9.04	.045	1.14	2.150	24.77	.625	15.88	15/64 (.234)	5.95	1.250	31.75	0.245	6.22	4.25	L	M
LTL028E 07 LTR028E 07	.373	9.47	.028	.71	.550	6.34	.500	12.70	1/4 (.250)	6.35	1.000	25.40	0.091	2.31	2.25	J	K
LTL038G 01 LTR038G 01	.386	9.80	.038	.97	1.280	14.75	.625	15.88	17/64 (.266)	6.75	1.250	31.75	0.170	4.32	3.25	K	L
LTL048J 01 LTR048J 01	.388	9.86	.048	1.22	2.750	31.68	.625	15.88			1.250	31.75	0.260	6.60	4.25	L	M
LTL030F 07 LTR030F 07	.398	10.10	.030	.76	.680	7.83	.500	12.70	9/32 (.281)	7.14	1.000	25.40	0.098	2.48	2.25	L	M
LTL032F 07 LTR032F 07	.402	10.21	.032	.81	.875	10.08	.500	12.70			1.000	25.40	0.104	2.64	2.25	L	M
LTL040H 07 LTR040H 07	.405	10.28	.040	1.02	1.500	17.28	.500	12.70			1.000	25.40	0.170	4.32	3.25	L	M
LTL051J 01 LTR051J 01	.408	10.36	.051	1.30	3.100	35.71	1.000	25.40	17/64 (.266)	6.75	2.000	50.80	0.275	6.99	4.25	P	R
LTL045H 07 LTR045H 07	.453	11.49	.045	1.14	2.150	24.77	.625	15.88	5/16 (.313)	7.94	1.250	31.75	0.191	4.86	3.25	P	R
LTL048J 07 LTR048J 07	.460	11.70	.048	1.22	2.750	31.68	.625	15.88			1.250	31.75	0.204	5.18	3.25	P	R
LTL035G 07 LTR035G 07	.468	11.88	.035	.89	1.070	12.33	.625	15.88	11/32 (.344)	8.73	1.250	31.75	0.114	2.89	2.25	P	R
LTL054K 01 LTR054K 01	.484	12.29	.054	1.37	3.500	40.32	1.000	25.40			2.000	50.80	0.295	7.49	4.25	R	S
LTL059K 01 LTR059K 01	.499	12.67	.059	1.50	4.500	51.84	1.000	25.40			2.000	50.80	0.320	8.13	4.25	U	W
LTL051J 07 LTR051J 07	.517	13.14	.051	1.30	3.100	35.71	.625	15.88	3/8 (.375)	9.53	1.250	31.75	0.217	5.51	3.25	U	W
LTL038G 07 LTR038G 07	.541	13.74	.038	.97	1.280	14.74	.625	15.88	13/32 (.406)	10.32	1.250	31.75	0.124	3.14	2.25	U	W
LTL063L 01 LTR063L 01	.560	14.22	.063	1.60	5.500	63.36	1.000	25.40	25/64 (.391)	9.92	2.000	50.80	0.350	8.89	4.25	W	X
LTL054K 07 LTR054K 07	.573	14.56	.054	1.37	3.500	40.32	.625	15.88	13/32 (.406)	10.32	1.250	31.75	0.230	5.83	3.25	W	X
LTL070M 01 LTR070M 01	.593	15.06	.070	1.78	7.500	86.40	1.000	25.40			2.000	50.80	0.375	9.53	4.25	Y	Z
LTL059K 07 LTR059K 07	.634	16.11	.059	1.50	4.500	51.84	1.000	25.40	15/32 (.469)	11.91	2.000	50.80	0.251	6.37	3.25	Y	Z
LTL075M 01 LTR075M 01	.637	16.18	.075	1.91	9.203	106.02	1.000	25.40	7/16 (.438)	11.11	2.000	50.80	0.402	10.21	4.25	Z	AA
LTL078N 01 LTR078N 01	.657	16.69	.078	1.98	10.450	120.38	1.000	25.40	29/64 (.453)	11.51	2.000	50.80	0.418	10.62	4.25	Z	AA
LTL063L 07 LTR063L 07	.675	17.15	.063	1.60	5.500	63.36	1.000	25.40	15/32 (.469)	11.91	2.000	50.80	0.268	6.80	3.25	AA	AB
LTL085N 01 LTR085N 01	.748	19.00	.085	2.16	12.860	148.15	1.250	31.75	33/64 (.516)	13.10	2.500	63.50	0.455	11.56	4.25	AA	AB
LTL070M 07 LTR070M 07	.754	19.15	.070	1.78	7.500	86.39	1.000	25.40	17/32 (.531)	13.49	2.000	50.80	0.298	7.56	3.25	AA	AB

SPECIAL INSTRUCTIONS FOR TORSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

TORSION SPRINGS: 90° FREE POSITION

Music Wire (Plated) or Stainless Steel (Passivated), LTL - Left Hand Wound; LTR - Right Hand Wound

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		TORQUE @ 90° DEFLECTION (T)		RADIUS (R)		SUGGESTED MANDREL SIZE		LENGTH OF LEG (A)		BODY LENGTH APPROX. (L)		NUMBER OF COILS	PRICE GROUP	
	IN.	MM	IN.	MM	IN.-LB.	KG-MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM		Music Wire	302 Stainless*
LTL075M 07 LTR075M 07	.810	20.56	.075	1.91	9.203	106.01	1.000	25.40	19/32 (.594)	15.08	2.000	50.80	0.319	8.10	3.25	AA	AB
LTL078N 07 LTR078N 07	.835	21.21	.078	1.98	10.450	120.38	1.000	25.40			2.000	50.80	0.332	8.42	3.25	AA	AB
LTL105Q 01 LTR105Q 01	.848	21.54	.105	2.67	21.000	241.92	1.750	44.45	37/64 (.578)	14.68	3.500	88.90	0.656	16.66	5.25	AC	AD
LTL095P 01 LTR095P 01	.871	22.12	.095	2.41	17.140	197.45	1.500	38.10	39/64 (.609)	15.48	3.000	76.20	0.509	12.93	4.25	AB	AC
LTL085N 07 LTR085N 07	.952	24.19	.085	2.16	12.860	148.14	1.250	31.75			2.500	63.50	0.361	9.18	3.25	AB	AC
LTL115R 01 LTR115R 01	.978	24.84	.115	2.92	28.000	322.56	2.000	50.80	11/16 (.688)	17.46	4.000	101.60	0.718	18.24	5.25	AD	AE
LTL125S 01 LTR125S 01	.989	25.12	.125	3.18	32.000	368.64	2.000	50.80			4.000	101.60	0.906	23.01	6.25	AE	AG
LTL135T 01 LTR135T 01	1.102	27.99	.135	3.43	40.000	460.80	2.000	50.80	49/64 (.766)	19.45	4.000	101.60	0.978	24.84	6.25	AG	AJ
LTL095P 07 LTR095P 07	1.110	28.20	.095	2.41	17.140	197.44	1.500	38.10	13/16 (.813)	20.64	3.000	76.20	0.404	10.26	3.25	AG	AJ
LTL105Q 07 LTR105Q 07	1.342	34.08	.105	2.67	21.000	241.90	1.750	44.45	1 1/32 (1.031)	26.19	3.500	88.90	0.446	11.33	3.25	AG	AJ
LTL125S 07 LTR125S 07	1.372	34.84	.125	3.18	32.000	368.62	2.000	50.80			4.000	101.60	0.656	16.67	4.25	AG	AJ
LTL115R 07 LTR115R 07	1.450	36.82	.115	2.92	28.000	322.54	2.000	50.80	1 3/32 (1.094)	27.78	4.000	101.60	0.489	12.41	3.25	AG	AJ
LTL135T 07 LTR135T 07	1.492	37.89	.135	3.43	40.000	460.77	2.000	50.80	1 1/8 (1.125)	28.58	4.000	101.60	0.709	18.00	4.25	AG	AJ

TORSION SPRINGS



SPECIAL INSTRUCTIONS FOR TORSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

TORSION SPRINGS: 180° FREE POSITION

Music Wire (Plated) or Stainless Steel (Passivated), LTL - Left Hand Wound; LTR - Right Hand Wound

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		TORQUE @ 180° DEFLECTION (T)		RADIUS (R)		SUGGESTED MANDREL SIZE		LENGTH OF LEG (A)		BODY LENGTH APPROX. (L)		NUMBER OF COILS	PRICE GROUP	
	IN.	MM	IN.	MM	IN.-LB.	KG-MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM		Music Wire M	302 Stainless* S
LTL012A 02 LTR012A 02	.110	2.79	.012	.31	.050	.58	.187	4.75	1/16 (.063)	1.59	0.375	9.53	0.086	2.18	6.00	G	J
LTL015B 02 LTR015B 02	.131	3.33	.015	.38	.100	1.15	.250	6.35	5/64 (.078)	1.98	0.500	12.70	0.107	2.72	6.00	G	J
LTL014A 02 LTR014A 02	.133	3.38	.014	.36	.075	.86	.250	6.35			0.500	12.70	0.103	2.62	6.00	G	J
LTL018C 02 LTR018C 02	.165	4.19	.018	.46	.150	1.73	.250	6.35	7/64 (.109)	2.78	0.500	12.70	0.150	3.81	7.00	G	J
LTL012A 04 LTR012A 04	.167	4.24	.012	.31	.050	.58	.250	6.35			0.500	12.70	0.059	1.50	4.00	G	J
LTL017C 02 LTR017C 02	.172	4.37	.017	.43	.125	1.44	.250	6.35			0.500	12.70	0.125	3.18	6.00	G	J
LTL020D 02 LTR020D 02	.179	4.55	.020	.51	.200	2.30	.375	9.53			0.750	19.05	0.165	4.19	7.00	G	J
LTL015B 04 LTR015B 04	.184	4.67	.015	.38	.100	1.15	.375	9.53	1/8 (.125)	3.18	0.750	19.05	0.075	1.91	4.00	G	J
LTL021D 02 LTR021D 02	.186	4.72	.021	.53	.250	2.88	.375	9.53			0.750	19.05	0.173	4.39	7.00	G	J
LTL023D 02 LTR023D 02	.191	4.85	.023	.58	.330	3.80	.375	9.53			0.750	19.05	0.190	4.83	7.00	G	J
LTL014A 04 LTR014A 04	.194	4.93	.014	.36	.075	.86	.375	9.53	9/64 (.141)	3.57	0.750	19.05	0.075	1.91	4.00	G	J
LTL018C 04 LTR018C 04	.217	5.51	.018	.46	.150	1.73	.375	9.53	5/32 (.156)	3.97	0.750	19.05	0.109	2.77	5.00	G	J
LTL025E 02 LTR025E 02	.225	5.72	.025	.64	.420	4.84	.375	9.53			0.750	19.05	0.206	5.23	7.00	G	J
LTL020D 04 LTR020D 04	.242	6.15	.020	.51	.200	2.30	.500	12.70	11/64 (.172)	4.37	1.000	25.40	0.125	3.18	5.00	G	J
LTL021D 04 LTR021D 04	.248	6.30	.021	.53	.250	2.88	.500	12.70			1.000	25.40	0.127	3.23	5.00	G	J
LTL017C 04 LTR017C 04	.249	6.32	.017	.43	.125	1.44	.375	9.53			0.750	19.05	0.090	2.29	4.00	G	J
LTL028E 02 LTR028E 02	.249	6.32	.028	.71	.550	6.34	.500	12.70			1.000	25.40	0.235	5.97	7.00	J	K
LTL023D 04 LTR023D 04	.259	6.58	.023	.58	.330	3.80	.500	12.70			1.000	25.40	0.145	3.68	5.00	G	J
LTL032F 02 LTR032F 02	.270	6.86	.032	.81	.875	10.08	.500	12.70			1.000	25.40	0.265	6.73	7.00	J	K
LTL030F 02 LTR030F 02	.273	6.93	.030	.76	.680	7.83	.500	12.70	3/16 (.188)	4.76	1.000	25.40	0.248	6.30	7.00	J	K
LTL035G 02 LTR035G 02	.304	7.72	.035	.89	1.070	12.33	.625	15.88	13/64 (.203)	5.16	1.250	31.75	0.290	7.37	7.00	J	K
LTL025E 04 LTR025E 04	.305	7.75	.025	.64	.420	4.84	.500	12.70	7/32 (.219)	5.56	1.000	25.40	0.151	3.84	5.00	G	J
LTL028E 04 LTR028E 04	.340	8.64	.028	.71	.550	6.34	.500	12.70	15/64 (.234)	5.95	1.000	25.40	0.175	4.45	5.00	J	K
LTL040H 02 LTR040H 02	.349	8.86	.040	1.02	1.500	17.28	.625	15.88			1.250	31.75	0.374	9.50	8.00	K	L

SPECIAL INSTRUCTIONS FOR TORSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

TORSION SPRINGS: 180° FREE POSITION

Music Wire (Plated) or Stainless Steel (Passivated), LTL - Left Hand Wound; LTR - Right Hand Wound

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		TORQUE @ 180° DEFLECTION (T)		RADIUS (R)		SUGGESTED MANDREL SIZE		LENGTH OF LEG (A)		BODY LENGTH APPROX. (L)		NUMBER OF COILS	PRICE GROUP	
	IN.	MM	IN.	MM	IN.-LB.	KG-MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM		Music Wire	302 Stainless*
LTL038G 02 LTR038G 02	.363	9.22	.038	.97	1.280	14.75	.625	15.88	1/4 (.250)	6.35	1.250	31.75	0.315	8.00	7.00	K	L
LTL032F 04 LTR032F 04	.366	9.30	.032	.81	.875	10.08	.500	12.70	17/64 (.266)	6.75	1.000	25.40	0.200	5.08	5.00	J	K
LTL045H 02 LTR045H 02	.377	9.58	.045	1.14	2.150	24.77	.625	15.88	1/4 (.250)	6.35	1.250	31.75	0.415	10.54	8.00	L	M
LTL030F 04 LTR030F 04	.395	10.03	.030	.76	.680	7.83	.500	12.70	9/32 (.281)	7.14	1.000	25.40	0.181	4.60	5.00	J	K
LTL048J 02 LTR048J 02	.405	10.29	.048	1.22	2.750	31.68	.625	15.88			1.250	31.75	0.450	11.43	8.00	L	M
LTL051J 02 LTR051J 02	.430	10.92	.051	1.30	3.100	35.71	1.000	25.40	19/64 (.297)	7.54	2.000	50.80	0.470	11.94	8.00	P	R
LTL035G 04 LTR035G 04	.451	11.46	.035	.89	1.070	12.33	.625	15.88	21/64 (.328)	8.33	1.250	31.75	0.212	5.38	5.00	K	L
LTL038G 04 LTR038G 04	.487	12.37	.038	.97	1.280	14.75	.625	15.88	23/64 (.359)	9.13	1.250	31.75	0.238	6.05	5.00	K	L
LTL054K 02 LTR054K 02	.509	12.93	.054	1.37	3.500	40.32	1.000	25.40	9/25 (.360)	9.14	2.000	50.80	0.500	12.70	8.00	R	S
LTL040H 04 LTR040H 04	.519	13.18	.040	1.02	1.500	17.28	1.000	25.40	3/8 (.375)	9.53	2.000	50.80	0.242	6.15	5.00	L	M
LTL059K 02 LTR059K 02	.526	13.36	.059	1.50	4.500	51.84	1.000	25.40	23/64 (.359)	9.13	2.000	50.80	0.540	13.72	8.00	U	W
LTL051J 04 LTR051J 04	.556	14.12	.051	1.30	3.100	35.71	1.000	25.40	25/64 (.391)	9.92	2.000	50.80	0.365	9.27	6.00	P	R
LTL045H 04 LTR045H 04	.575	14.61	.045	1.14	2.150	24.77	1.000	25.40	27/64 (.422)	10.72	2.000	50.80	0.280	7.11	5.00	L	M
LTL063L 02 LTR063L 02	.591	15.01	.063	1.60	5.500	63.36	1.000	25.40			2.000	50.80	0.580	14.73	8.00	W	X
LTL048J 04 LTR048J 04	.619	15.72	.048	1.22	2.750	31.68	1.000	25.40	29/64 (.453)	11.51	2.000	50.80	0.292	7.42	5.00	P	R
LTL070M 02 LTR070M 02	.625	15.88	.070	1.78	7.500	86.40	1.000	25.40	7/16 (.438)	11.11	2.000	50.80	0.640	16.26	8.00	Y	Z
LTL054K 04 LTR054K 04	.654	16.61	.054	1.37	3.500	40.32	1.000	25.40	31/64 (.484)	12.30	2.000	50.80	0.390	9.91	6.00	S	T
LTL075M 02 LTR075M 02	.672	17.07	.075	1.91	9.203	106.02	1.000	25.40	15/32 (.469)	11.91	2.000	50.80	0.689	17.50	8.00	Z	AA
LTL059K 04 LTR059K 04	.681	17.30	.059	1.50	4.500	51.84	1.000	25.40	1/2 (.500)	12.70	2.000	50.80	0.425	10.80	6.00	X	Y
LTL078N 02 LTR078N 02	.693	17.60	.078	1.98	10.450	120.38	1.000	25.40	31/64 (.484)	12.30	2.000	50.80	0.716	18.19	8.00	Z	AA
LTL075M 04 LTR075M 04	.757	19.23	.075	1.91	9.203	106.02	1.000	25.40	35/64 (.547)	13.89	2.000	50.80	0.612	15.54	7.00	AA	AB
LTL063L 04 LTR063L 04	.767	19.48	.063	1.60	5.500	63.36	1.000	25.40			2.000	50.80	0.460	11.68	6.00	Y	Z
LTL078N 04 LTR078N 04	.781	19.84	.078	1.98	10.450	120.38	1.000	25.40	9/16 (.563)	14.29	2.000	50.80	0.637	16.18	7.00	AB	AB
LTL085N 02 LTR085N 02	.790	20.07	.085	2.16	12.860	148.15	1.250	31.75			2.500	63.50	0.780	19.81	8.00	AA	AB

TORSION SPRINGS

SPECIAL INSTRUCTIONS FOR TORSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

TORSION SPRINGS: 180° FREE POSITION

Music Wire (Plated) or Stainless Steel (Passivated), LTL - Left Hand Wound; LTR - Right Hand Wound

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		TORQUE @ 180° DEFLECTION (T)		RADIUS (R)		SUGGESTED MANDREL SIZE		LENGTH OF LEG (A)		BODY LENGTH APPROX. (L)		NUMBER OF COILS	PRICE GROUP	
	IN.	MM	IN.	MM	IN.-LB.	KG-MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM		Music Wire	302 Stainless*
LTL070M 04 LTR070M 04	.810	20.57	.070	1.79	7.500	86.40	1.000	25.40	19/32 (.594)	15.08	2.000	50.80	0.500	12.70	6.00	Z	AA
LTL085N 04 LTR085N 04	.891	22.63	.085	2.16	12.860	148.15	1.250	31.75	41/64 (.641)	16.27	2.500	63.50	0.694	17.63	7.00	AB	AC
LTL095P 02 LTR095P 02	.920	23.37	.095	2.41	17.140	197.45	1.500	38.10	21/32 (.656)	16.67	3.000	76.20	0.872	22.15	8.00	AB	AC
LTL105Q 02 LTR105Q 02	.982	24.94	.105	2.67	21.000	241.92	1.750	44.45	45/64 (.703)	17.86	3.500	88.90	1.050	26.67	9.00	AC	AD
LTL095P 04 LTR095P 04	1.038	26.37	.095	2.41	17.140	197.45	1.500	38.10	49/64 (.766)	19.45	3.000	76.20	0.775	19.69	7.00	AB	AC
LTL115R 02 LTR115R 02	1.043	26.49	.115	2.92	28.000	322.56	2.000	50.80	47/64 (.734)	18.65	4.000	101.60	1.150	29.21	9.00	AD	AE
LTL125S 02 LTR125S 02	1.082	27.48	.125	3.18	32.000	368.64	2.000	50.80	49/64 (.766)	19.45	4.000	101.60	1.500	38.10	11.00	AE	AG
LTL135T 02 LTR135T 02	1.189	30.20	.135	3.43	40.000	460.80	2.000	50.80	27/32 (.844)	21.43	4.000	101.60	1.620	41.15	11.00	AG	AJ
LTL105Q 04 LTR105Q 04	1.248	31.70	.105	2.67	21.000	241.92	1.750	44.45	15/16 (.938)	23.81	3.500	88.90	0.840	21.34	7.00	AD	AE
LTL115R 04 LTR115R 04	1.348	34.24	.115	2.92	28.000	322.56	2.000	50.80	1 (1.00)	25.40	4.000	101.60	0.920	23.37	7.00	AE	AG
LTL125S 04 LTR125S 04	1.356	34.44	.125	3.18	32.000	368.64	2.000	50.80			4.000	101.60	1.125	28.58	8.00	AG	AJ
LTL135T 04 LTR135T 04	1.491	37.87	.135	3.43	40.000	460.80	2.000	50.80	1 3/32 (1.094)	27.78	4.000	101.60	1.215	30.86	8.00	AJ	AK

TORSION SPRINGS

SPECIAL INSTRUCTIONS FOR TORSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

TORSION SPRINGS: 270° FREE POSITION

Music Wire (Plated) or Stainless Steel (Passivated), LTL - Left Hand Wound; LTR - Right Hand Wound

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		TORQUE @ 270° DEFLECTION (T)		RADIUS (R)		SUGGESTED MANDREL SIZE		LENGTH OF LEG (A)		BODY LENGTH APPROX. (L)		NUMBER OF COILS	PRICE GROUP	
	IN.	MM	IN.	MM	IN.-LB.	KG-MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM		Music Wire	302 Stainless*
LTL012A 03 LTR012A 03	.103	2.62	.012	.30	.050	.58	.187	4.75	1/16 (.063)	1.59	0.375	9.53	0.139	3.53	9.75	G	J
LTL014A 03 LTR014A 03	.124	3.15	.014	.36	.075	.86	.250	6.35	5/64 (.078)	1.98	0.500	12.70	0.156	3.96	9.75	G	J
LTL015B 03 LTR015B 03	.125	3.18	.015	.38	.100	1.15	.250	6.35			0.500	12.70	0.173	4.39	9.75	G	J
LTL017C 03 LTR017C 03	.160	4.06	.017	.43	.125	1.44	.250	6.35	7/64 (.109)	2.78	0.500	12.70	0.188	4.78	9.75	G	J
LTL018C 03 LTR018C 03	.160	4.06	.018	.46	.150	1.73	.250	6.35			0.500	12.70	0.228	5.79	10.75	G	J
LTL012A 05 LTR012A 05	.171	4.34	.012	.30	.050	.58	.250	6.35			0.500	12.70	0.086	2.18	5.75	G	J
LTL020D 03 LTR020D 03	.175	4.45	.020	.51	.200	2.30	.375	9.53			0.750	19.05	0.240	6.10	10.75	G	J
LTL021D 03 LTR021D 03	.185	4.70	.021	.53	.250	2.88	.375	9.53	1/8 (.125)	3.18	0.750	19.05	0.266	6.76	10.75	G	J
LTL023D 03 LTR023D 03	.187	4.75	.023	.58	.330	3.80	.375	9.53			0.750	19.05	0.280	7.11	10.75	G	J
LTL015B 05 LTR015B 05	.200	5.08	.015	.38	.100	1.15	.375	9.53	9/64 (.141)	3.57	0.750	19.05	0.107	2.72	5.75	G	J
LTL014A 05 LTR014A 05	.201	5.11	.014	.36	.075	.86	.375	9.53			0.750	19.05	0.100	2.54	5.75	G	J
LTL025E 03 LTR025E 03	.220	5.59	.025	.64	.420	4.84	.375	9.53			0.750	19.05	0.304	7.72	10.75	G	J
LTL028E 03 LTR028E 03	.245	6.22	.028	.71	.550	6.34	.500	12.70	11/64 (.172)	4.37	1.000	25.40	0.340	8.64	10.75	J	K
LTL018C 05 LTR018C 05	.246	6.25	.018	.46	.150	1.73	.375	9.53			0.750	19.05	0.150	3.81	6.75	G	J
LTL021D 05 LTR021D 05	.246	6.25	.021	.53	.250	2.88	.500	12.70			1.000	25.40	0.195	4.95	7.75	G	J
LTL023D 05 LTR023D 05	.251	6.38	.023	.58	.330	3.80	.500	12.70			1.000	25.40	0.210	5.33	7.75	G	J
LTL017C 05 LTR017C 05	.259	6.58	.017	.43	.125	1.44	.375	9.53	3/16 (.188)	4.76	0.750	19.05	0.120	3.05	5.75	G	J
LTL032F 03 LTR032F 03	.264	6.71	.032	.81	.875	10.08	.500	12.70	11/64 (.172)	4.37	1.000	25.40	0.385	9.78	10.75	J	K
LTL020D 05 LTR020D 05	.268	6.81	.020	.51	.200	2.30	.500	12.70	3/16 (.188)	4.76	1.000	25.40	0.160	4.06	6.75	G	J
LTL030F 03 LTR030F 03	.271	6.88	.030	.76	.680	7.83	.500	12.70			1.000	25.40	0.365	9.27	10.75	J	K
LTL035G 03 LTR035G 03	.312	7.93	.035	.89	1.070	12.33	.625	15.88	13/64 (.203)	5.16	1.250	31.75	0.425	10.80	10.75	K	L
LTL028E 05 LTR028E 05	.329	8.36	.028	.71	.550	6.34	.500	12.70	15/64 (.234)	5.95	1.000	25.40	0.255	6.48	7.75	J	K

TORSION SPRINGS



SPECIAL INSTRUCTIONS FOR TORSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

TORSION SPRINGS: 270° FREE POSITION

Music Wire (Plated) or Stainless Steel (Passivated), LTL - Left Hand Wound; LTR - Right Hand Wound

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		TORQUE @ 270° DEFLECTION (T)		RADIUS (R)		SUGGESTED MANDREL SIZE		LENGTH OF LEG (A)		BODY LENGTH APPROX. (L)		NUMBER OF COILS	PRICE GROUP	
	IN.	MM	IN.	MM	IN.-LB.	KG-MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM		Music Wire M	302 Stainless* S
LTL025E 05 LTR025E 05	.341	8.66	.025	.64	.420	4.84	.500	12.70	1/4 (.250)	6.35	1.000	25.40	0.206	5.23	6.75	G	J
LTL032F 05 LTR032F 05	.354	8.99	.032	.81	.875	10.08	.500	12.70			1.000	25.40	0.290	7.37	7.75	J	K
LTL038G 03 LTR038G 03	.355	9.02	.038	.97	1.280	14.75	.625	15.88			1.250	31.75	0.455	11.56	10.75	K	L
LTL040H 03 LTR040H 03	.359	9.12	.040	1.02	1.500	17.28	.625	15.88			1.250	31.75	0.525	13.34	11.75	L	M
LTL030F 05 LTR030F 05	.377	9.58	.030	.76	.680	7.83	.500	12.70	17/64 (.266)	6.75	1.000	25.40	0.280	7.11	7.75	J	K
LTL045H 03 LTR045H 03	.382	9.70	.045	1.14	2.150	24.77	.625	15.88	1/4 (.250)	6.35	1.250	31.75	0.585	14.86	11.75	L	M
LTL048J 03 LTR048J 03	.417	10.59	.048	1.22	2.750	31.68	.625	15.88	9/32 (.281)	7.14	1.250	31.75	0.630	16.00	11.75	P	R
LTL035G 05 LTR035G 05	.436	11.07	.035	.89	1.070	12.33	.625	15.88	5/16 (.313)	7.94	1.250	31.75	0.315	8.00	7.75	K	L
LTL051J 03 LTR051J 03	.439	11.15	.051	1.30	3.100	35.71	1.000	25.40	19/64 (.297)	7.54	2.000	50.80	0.660	16.76	11.75	P	R
LTL038G 05 LTR038G 05	.477	12.12	.038	.97	1.280	14.75	.625	15.88	11/32 (.344)	8.73	1.250	31.75	0.342	8.69	7.75	K	L
LTL040H 05 LTR040H 05	.512	13.01	.040	1.02	1.500	17.28	1.000	25.40	3/8 (.375)	9.53	2.000	50.80	0.360	9.14	7.75	L	M
LTL054K 03 LTR054K 03	.514	13.06	.054	1.37	3.500	40.32	1.000	25.40	23/64 (.359)	9.13	2.000	50.80	0.700	17.78	11.75	S	T
LTL059K 03 LTR059K 03	.537	13.64	.059	1.50	4.500	51.84	1.000	25.40	3/8 (.375)	9.53	2.000	50.80	0.765	19.43	11.75	X	Y
LTL045H 05 LTR045H 05	.556	14.12	.045	1.14	2.150	24.77	1.000	25.40	13/32 (.406)	10.32	2.000	50.80	0.405	10.29	7.75	L	M
LTL051J 05 LTR051J 05	.571	14.50	.051	1.30	3.100	35.71	1.000	25.40	27/64 (.422)	10.72	2.000	50.80	0.510	12.95	8.75	P	R
LTL063L 03 LTR063L 03	.600	15.24	.063	1.60	5.500	63.36	1.000	25.40			2.000	50.80	0.820	20.83	11.75	X	Y
LTL048J 05 LTR048J 05	.601	15.27	.048	1.22	2.750	31.68	1.000	25.40	7/16 (.438)	11.11	2.000	50.80	0.435	11.05	7.75	P	R
LTL070M 03 LTR070M 03	.639	16.23	.070	1.78	7.500	86.40	1.000	25.40	31/64 (.484)	12.30	2.000	50.80	0.805	20.45	11.75	X	Y
LTL054K 05 LTR054K 05	.664	16.87	.054	1.37	3.500	40.32	1.000	25.40			2.000	50.80	0.540	13.72	8.75	S	T
LTL075M 03 LTR075M 03	.685	17.40	.075	1.91	9.203	106.02	1.000	25.40	33/64 (.516)	13.10	2.000	50.80	0.975	24.77	11.75	Z	AA
LTL059K 05 LTR059K 05	.699	17.76	.059	1.50	4.500	51.84	1.000	25.40			2.000	50.80	0.585	14.86	8.75	X	Y
LTL078N 03 LTR078N 03	.706	17.93	.078	1.98	10.450	120.38	1.000	25.40	1/2 (.500)	12.70	2.000	50.80	1.015	25.78	11.75	Z	AA
LTL063L 05 LTR063L 05	.784	19.91	.063	1.60	5.500	63.36	1.000	25.40	37/64 (.578)	14.68	2.000	50.80	0.630	16.00	8.75	X	Y
LTL085N 03 LTR085N 03	.805	20.45	.085	2.16	12.860	148.15	1.250	31.75			2.500	63.50	1.106	28.09	11.75	AA	AB

SPECIAL INSTRUCTIONS FOR TORSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

TORSION SPRINGS: 270° FREE POSITION

Music Wire (Plated) or Stainless Steel (Passivated), LTL - Left Hand Wound; LTR - Right Hand Wound

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		TORQUE @ 270° DEFLECTION (T)		RADIUS (R)		SUGGESTED MANDREL SIZE		LENGTH OF LEG (A)		BODY LENGTH APPROX. (L)		NUMBER OF COILS	PRICE GROUP	
	IN.	MM	IN.	MM	IN.-LB.	KG-MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM		Music Wire	302 Stainless*
LTL075M 05 LTR075M 05	.810	20.57	.075	1.91	9.203	106.02	1.000	25.40	19/32 (.594)	15.08	2.000	50.80	0.822	20.88	9.75	AB	AC
LTL070M 05 LTR070M 05	.826	20.98	.070	1.78	7.500	86.40	1.000	25.40	39/64 (.609)	15.48	2.000	50.80	0.790	20.07	8.75	AA	AB
LTL078N 05 LTR078N 05	.835	21.21	.078	1.98	10.450	120.38	1.000	25.40			2.000	50.80	0.855	21.72	9.75	AB	AC
LTL095P 03 LTR095P 03	.937	23.80	.095	2.41	17.140	197.45	1.500	38.10	43/64 (.672)	17.07	3.000	76.20	1.235	31.37	11.75	AB	AC
LTL085N 05 LTR085N 05	.952	24.18	.085	2.16	12.860	148.15	1.250	31.75	45/64 (.703)	17.86	2.500	63.50	0.932	23.67	9.75	AC	AD
LTL115R 03 LTR115R 03	1.086	27.58	.115	2.92	28.000	322.56	2.000	50.80	25/32 (.781)	19.84	4.000	101.60	1.696	43.08	13.75	AD	AE
LTL105Q 03 LTR105Q 03	1.090	27.69	.105	2.67	21.000	241.92	1.750	44.45	51/64 (.797)	20.24	3.500	88.90	1.339	34.01	11.75	AC	AD
LTL095P 05 LTR095P 05	1.110	28.19	.095	2.41	17.140	197.45	1.500	38.10	53/64 (.828)	21.03	3.000	76.20	1.042	26.47	9.75	AD	AE
LTL125S 03 LTR125S 03	1.189	30.20	.125	3.18	32.000	368.64	2.000	50.80	55/64 (.859)	21.83	4.000	101.60	1.968	49.99	14.75	AG	AJ
LTL135T 03 LTR135T 03	1.301	33.05	.135	3.43	40.000	460.80	2.000	50.80	15/16 (.938)	23.81	4.000	101.60	2.126	54.00	14.75	AG	AJ
LTL105Q 05 LTR105Q 05	1.342	34.09	.105	2.67	21.000	241.92	1.750	44.45	1 1/64 (1.016)	25.80	3.500	88.90	1.129	28.68	9.75	AE	AG
LTL125S 05 LTR125S 05	1.516	38.51	.125	3.18	32.000	368.64	2.000	50.80	1 9/64 (1.141)	28.97	4.000	101.60	1.593	40.46	11.75	AJ	AK
LTL135T 05 LTR135T 05	1.660	42.16	.135	3.43	40.000	460.80	2.000	50.80	1 1/4 (1.250)	31.75	4.000	101.60	1.721	43.71	11.75	AK	AL

TORSION SPRINGS



SPECIAL INSTRUCTIONS FOR TORSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

TORSION SPRINGS: 360° FREE POSITION

Music Wire (Plated) or Stainless Steel (Passivated), LTL - Left Hand Wound; LTR - Right Hand Wound

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		TORQUE @ 360° DEFLECTION (T)		RADIUS (R)		SUGGESTED MANDREL SIZE		LENGTH OF LEG (A)		BODY LENGTH APPROX. (L)		NUMBER OF COILS	PRICE GROUP	
	IN.	MM	IN.	MM	IN.-LB.	KG-MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM		Music Wire M	302 Stainless* S
LTL012A 06 LTR012A 06	.174	4.42	.012	.30	.050	.58	.250	6.35	1/8 (.125)	3.18	0.500	12.70	0.102	2.59	7.50	G	J
LTL014A 06 LTR014A 06	.204	5.18	.014	.36	.075	.86	.375	9.53	9/64 (.141)	3.57	0.750	19.05	0.119	3.02	7.50	G	J
LTL015B 06 LTR015B 06	.208	5.28	.015	.38	.100	1.15	.375	9.53			0.750	19.05	0.128	3.24	7.50	G	J
LTL012A 08 LTR012A 08	.221	5.62	.012	.30	.050	.58	.375	9.53	5/32 (.156)	3.97	0.750	19.05	0.078	1.98	5.50	G	J
LTL018C 06 LTR018C 06	.234	5.94	.018	.46	.150	1.73	.375	9.53	11/64 (.172)	4.37	0.750	19.05	0.200	5.08	9.50	G	J
LTL017C 06 LTR017C 06	.235	5.97	.017	.43	.125	1.44	.375	9.53			0.750	19.05	0.167	4.24	8.50	G	J
LTL020D 06 LTR020D 06	.254	6.45	.020	.51	.200	2.30	.500	12.70			1.000	25.40	0.215	5.46	9.50	G	J
LTL015B 08 LTR015B 08	.271	6.88	.015	.38	.100	1.15	.500	12.70	3/16 (.188)	4.76	1.000	25.40	0.098	2.48	5.50	G	J
LTL023D 06 LTR023D 06	.271	6.88	.023	.58	.330	3.80	.500	12.70			1.000	25.40	0.250	6.35	9.50	G	J
LTL021D 06 LTR021D 06	.272	6.91	.021	.53	.250	2.88	.500	12.70			1.000	25.40	0.230	5.84	9.50	G	J
LTL014A 08 LTR014A 08	.273	6.93	.014	.36	.075	.86	.375	9.53	7/32 (.219)	5.56	0.750	19.05	0.091	2.31	5.50	G	J
LTL017C 08 LTR017C 08	.303	7.68	.017	.43	.125	1.44	.500	12.70			1.000	25.40	0.128	3.24	6.50	G	J
LTL025E 06 LTR025E 06	.325	8.26	.025	.64	.420	4.84	.500	12.70	15/64 (.234)	5.95	1.000	25.40	0.275	6.99	9.50	G	J
LTL028E 06 LTR028E 06	.355	9.02	.028	.71	.550	6.34	.500	12.70	1/4 (.250)	6.35	1.000	25.40	0.305	7.75	9.50	J	K
LTL018C 08 LTR018C 08	.371	9.43	.018	.46	.150	1.73	.500	12.70	17/64 (.266)	6.75	1.000	25.40	0.117	2.97	5.50	J	K
LTL032F 06 LTR032F 06	.382	9.70	.032	.81	.875	10.08	.500	12.70			1.000	25.40	0.345	8.76	9.50	J	K
LTL030F 06 LTR030F 06	.410	10.41	.030	.76	.680	7.83	.500	12.70	19/64 (.297)	7.54	1.000	25.40	0.325	8.26	9.50	J	K
LTL021D 08 LTR021D 08	.414	10.51	.021	.53	.250	2.88	.500	12.70			1.000	25.40	0.137	3.47	5.50	J	K
LTL020D 08 LTR020D 08	.424	10.77	.020	.51	.200	2.30	.625	15.88	5/16 (.313)	7.94	1.250	31.75	0.130	3.30	5.50	J	K
LTL023D 08 LTR023D 08	.451	11.46	.023	.58	.330	3.80	.625	15.88	21/64 (.328)	8.33	1.250	31.75	0.150	3.80	5.50	K	L
LTL035G 06 LTR035G 06	.472	11.99	.035	.89	1.070	12.33	.625	15.88	11/32 (.344)	8.73	1.250	31.75	0.380	9.65	9.50	K	L
LTL025E 08 LTR025E 08	.495	12.57	.025	.64	.420	4.84	.625	15.88	23/64 (.359)	9.13	1.250	31.75	0.163	4.13	5.50	J	K
LTL040H 06 LTR040H 06	.508	12.90	.040	1.02	1.500	17.28	1.000	25.40	3/8 (.375)	9.53	2.000	50.80	0.470	11.94	10.50	L	M
LTL038G 06 LTR038G 06	.514	13.06	.040	1.02	1.28	14.75	.625	15.88			1.250	31.75	0.410	10.41	9.50	K	L

SPECIAL INSTRUCTIONS FOR TORSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

TORSION SPRINGS: 360° FREE POSITION

Music Wire (Plated) or Stainless Steel (Passivated), LTL - Left Hand Wound; LTR - Right Hand Wound

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		TORQUE @ 360° DEFLECTION (T)		RADIUS (R)		SUGGESTED MANDREL SIZE		LENGTH OF LEG (A)		BODY LENGTH APPROX. (L)		NUMBER OF COILS	PRICE GROUP	
	IN.	MM	IN.	MM	IN.-LB.	KG-MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM		Music Wire	302 Stainless*
LTL045H 06 LTR045H 06	.549	13.94	.045	1.14	1.150	13.25	1.000	25.40	25/64 (.391)	9.92	2.000	50.80	0.530	13.46	10.50	L	M
LTL028E 08 LTR028E 08	.592	15.05	.028	.71	.550	6.34	1.000	25.40	7/16 (.438)	11.11	2.000	50.80	0.182	4.62	5.50	P	R
LTL048J 06 LTR048J 06	.595	15.11	.048	1.22	2.750	31.68	1.000	25.40	29/64 (.453)	11.51	2.000	50.80	0.570	14.48	10.50	P	R
LTL051J 06 LTR051J 06	.628	15.95	.051	1.30	3.100	35.71	1.000	25.40	29/64 (.453)	11.51	2.000	50.80	0.600	15.24	10.50	P	R
LTL030F 08 LTR030F 08	.632	16.04	.030	.76	.680	7.83	1.000	25.40	15/32 (.469)	11.91	2.000	50.80	0.195	4.95	5.50	P	R
LTL032F 08 LTR032F 08	.637	16.19	.032	.81	.875	10.08	1.000	25.40	1/2 (.500)	12.70	2.000	50.80	0.208	5.28	5.50	S	T
LTL040H 08 LTR040H 08	.672	17.07	.040	1.02	1.500	17.28	1.000	25.40	33/64 (.516)	13.10	2.000	50.80	0.690	17.53	11.50	U	W
LTL054K 06 LTR054K 06	.694	17.63	.054	1.37	3.500	40.32	1.000	25.40	35/64 (.547)	13.89	2.000	50.80	0.750	19.05	11.50	X	Y
LTL059K 06 LTR059K 06	.709	18.01	.059	1.50	4.500	51.84	1.000	25.40	9/16 (.563)	14.29	2.000	50.80	0.383	9.72	7.50	X	Y
LTL035G 08 LTR035G 08	.743	18.88	.035	.89	1.070	12.33	1.000	25.40	19/32 (.594)	15.08	2.000	50.80	0.805	20.45	11.50	X	Y
LTL045H 08 LTR045H 08	.751	19.09	.045	1.14	2.150	24.77	1.000	25.40	39/64 (.609)	15.48	2.000	50.80	0.570	14.48	8.50	X	Y
LTL048J 08 LTR048J 08	.763	19.38	.048	1.22	2.750	31.68	1.000	25.40	5/8 (.625)	15.88	2.000	50.80	0.890	22.61	11.50	AB	AC
LTL063L 06 LTR063L 06	.798	20.27	.060	1.52	5.500	63.36	1.000	25.40	41/64 (.641)	16.27	2.000	50.80	0.513	13.03	8.50	AB	AC
LTL063L 08 LTR063L 08	.830	21.08	.060	1.52	5.500	63.36	1.000	25.40	5/8 (.625)	15.88	2.000	50.80	0.247	6.27	5.50	AC	AD
LTL070M 06 LTR070M 06	.843	21.41	.070	1.78	7.500	86.40	1.000	25.40	45/64 (.703)	17.86	2.000	50.80	0.561	14.24	8.50	AC	AD
LTL054K 08 LTR054K 08	.848	21.54	.054	1.37	3.500	40.32	1.000	25.40	47/64 (.734)	18.65	2.000	50.80	0.880	22.35	10.50	AC	AD
LTL051J 08 LTR051J 08	.859	21.83	.051	1.30	3.100	35.71	1.000	25.40	3/4 (.750)	19.05	2.000	50.80	0.915	23.24	10.50	AC	AD
LTL038G 08 LTR038G 08	.861	21.87	.038	.97	1.280	14.74	1.000	25.40	5/8 (.625)	15.88	2.000	50.80	0.247	6.27	5.50	AC	AD
LTL059K 08 LTR059K 08	.939	23.85	.059	1.50	4.500	51.84	1.000	25.40	5/8 (.625)	15.88	2.500	63.50	1.084	27.53	11.50	AD	AE
LTL075M 06 LTR075M 06	.985	25.02	.075	1.91	9.203	106.02	1.000	25.40	27/32 (.844)	21.43	3.000	76.20	0.665	16.89	8.50	AE	AG
LTL078N 06 LTR078N 06	1.015	25.78	.078	1.98	10.450	120.38	1.000	25.40	15/16 (.938)	23.81	3.000	76.20	1.211	30.76	11.50	AE	AG
LTL085N 06 LTR085N 06	1.070	27.08	.085	2.16	12.860	148.15	1.250	31.75									
LTL070M 08 LTR070M 08	1.116	28.35	.070	1.78	7.500	86.39	1.500	38.10									
LTL095P 06 LTR095P 06	1.243	31.57	.095	2.41	17.140	197.45	1.500	38.10									

TORSION SPRINGS



SPECIAL INSTRUCTIONS FOR TORSION SERIES

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

TORSION SPRINGS: 360° FREE POSITION

Music Wire (Plated) or Stainless Steel (Passivated), LTL - Left Hand Wound; LTR - Right Hand Wound

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		TORQUE @ 360° DEFLECTION (T)		RADIUS (R)		SUGGESTED MANDREL SIZE		LENGTH OF LEG (A)		BODY LENGTH APPROX. (L)		NUMBER OF COILS	PRICE GROUP	
	IN.	MM	IN.	MM	IN.-LB.	KG-MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM		Music Wire	302 Stainless*
LTL075M 08 LTR075M 08	1.348	34.25	.075	1.91	9.203	106.01	1.750	44.45	1 1/64 (1.016)	25.80	3.500	88.90	0.638	16.19	7.50	AG	AJ
LTL105Q 06 LTR105Q 06	1.369	34.77	.105	2.67	21.000	241.92	1.750	44.45	1 1/32 (1.031)	26.19	3.500	88.90	1.417	35.99	12.50	AG	AJ
LTL078N 08 LTR078N 08	1.390	35.30	.078	1.98	10.450	120.38	1.750	44.45	1 3/64 (1.047)	26.59	3.500	88.90	0.663	16.84	7.50	AJ	AK
LTL085N 08 LTR085N 08	1.412	35.85	.085	2.16	12.860	148.14	2.000	50.80	1 5/64 (1.078)	27.38	4.000	101.60	0.808	20.51	8.50	AJ	AK
LTL115R 06 LTR115R 06	1.465	37.21	.115	2.92	28.000	322.56	2.000	50.80	1 3/32 (1.094)	27.78	4.000	101.60	1.552	39.42	12.50	AJ	AK
LTL125S 06 LTR125S 06	1.605	40.77	.125	3.18	32.000	368.64	2.000	50.80	1 7/32 (1.219)	30.96	4.000	101.60	1.937	49.20	14.50	AK	AL
LTL095P 08 LTR095P 08	1.648	41.86	.095	2.41	17.140	197.44	2.000	50.80	1 1/4 (1.250)	31.75	4.000	101.60	0.903	22.92	8.50	AK	AL
LTL135T 06 LTR135T 06	1.755	44.58	.135	3.43	40.000	460.80	2.000	50.80	1 21/64 (1.328)	33.73	4.000	101.60	2.092	53.14	14.50	AL	AM
LTL105Q 08 LTR105Q 08	1.797	45.65	.105	2.67	21.000	241.90	2.000	50.80	1 3/8 (1.375)	34.93	4.000	101.60	1.103	28.00	9.50	AL	AM
LTL115R 08 LTR115R 08	1.941	49.31	.115	2.92	28.000	322.54	2.000	50.80	1 31/64 (1.484)	37.70	4.000	101.60	1.208	30.67	9.50	AL	AM
LTL125S 08 LTR125S 08	1.968	49.98	.125	3.18	32.000	368.62	2.000	50.80	1 33/64 (1.516)	38.50	4.000	101.60	1.563	39.69	11.50	AL	AM
LTL135T 08 LTR135T 08	2.141	54.37	.135	3.43	40.000	460.77	2.125	53.98	1 21/32 (1.656)	42.07	4.250	107.95	1.688	42.86	11.50	AL	AM

TORSION SPRINGS

SPECIAL INSTRUCTIONS FOR TORSION SERIES


STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless; "S316" for Type 316 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs., visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Hgt. are for Music Wire. For Type 302 or Type 316 Stainless, multiply figures shown by 5/6 (.833).

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

Behind every spring... our long-standing commitment.

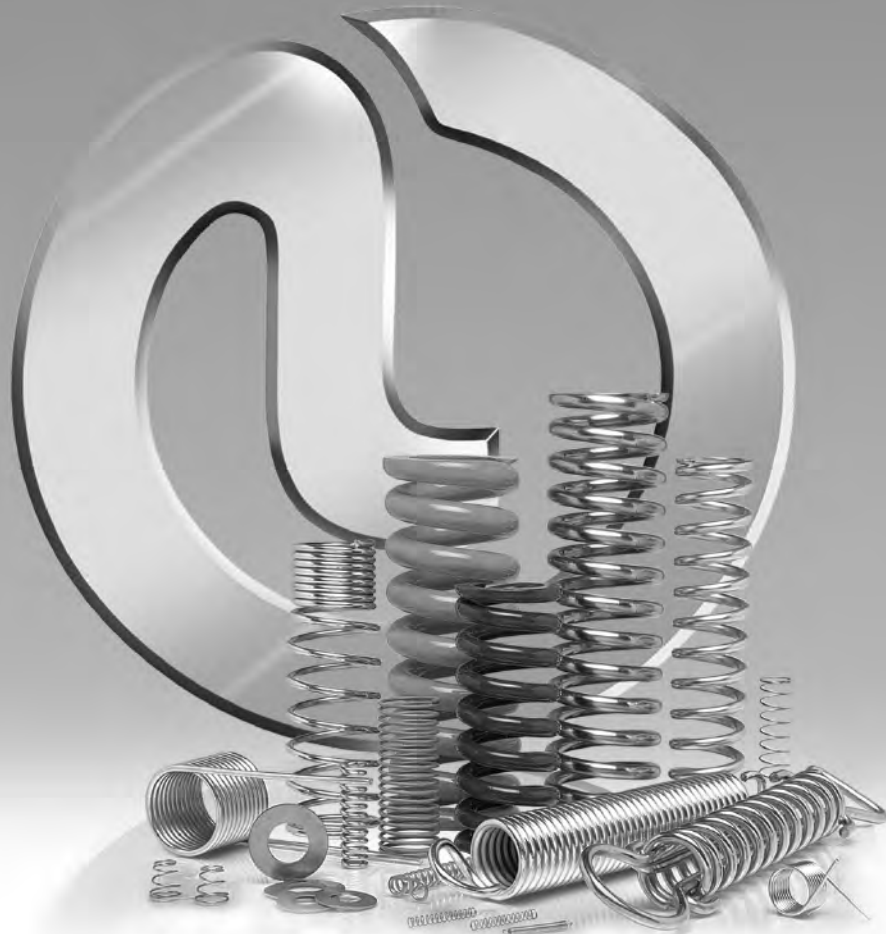

Lee Spring's strong commitment to customer satisfaction began over 90 years ago and remains unsurpassed. Maybe that's why we're the world's premier choice when it comes to quality, selection and service.

- **Real Responsiveness** — when our customers ask, we listen... and react with enhanced products and services.
- **Complete Customer Support** — in-house engineering experts and attentive customer service representatives.
- **Incredible Inventory** — an expansive inventory of stock products - all ready to go with *FREE shipping!*
- **Custom Capabilities** — custom springs, stampings and wireforms manufactured across eight international facilities.
- **Comprehensive Catalogs** — find and order over 19,000 stock items in our extensive print and easy to use online catalogs.

Experience the Lee Spring commitment for yourself.
Call us today at 888-777-4647 or visit www.leespring.com.

 **Lee Spring®**
leespring.com

 **ROHS**
COMPLIANT

You asked, we listened and we responded with an expanded line of Stock Belleville Washers.

When your compression spring application requires a high load in a small space, Lee Spring's Belleville Washers can be the solution.

- Conical configuration enables them to support high loads with relatively small deflections and solid heights compared to helical springs.
- Often used to solve vibration, thermal expansion, relaxation and bolt creep problems.



Lee Spring Belleville Washers are manufactured in 300 Series Stainless Steel. This alloy offers good corrosion resistance for most applications. Additionally, Lee Spring Washers are passivated to remove contaminants and further improve resistance to corrosion. 300 Series Stainless Steel is slightly magnetic and is recommended for any applications where the temperature is below 500° F (260° C).

Additional load flexibility can be achieved by stacking Belleville Washers in various configurations. As shown in the diagrams below, Belleville Washers can be used in four different ways:

- Single:** One washer
- Parallel:** All washers stacked the same way
- Series:** All washers stacked opposite each other
- Series-Parallel:** A combination of the two

A single Belleville Spring Washer has a specific load for a given deflection. Two washers stacked in **parallel** will yield

double the load of a single washer for the same deflection; three washers will yield triple the load; four washers will yield four times the load, etc.

Alternatively, two washers stacked in **series** will yield double the **deflection** of a single washer for the same load; three washers will yield triple the deflection; four washers will yield four times the deflection, etc.


Various series-parallel combinations therefore can provide a wide variety of combined results of load versus deflection for the stack. Consequently, depending upon the application, the designer can:

- Stack in "**parallel**" to increase load
- Stack in "**series**" to increase deflection
- Adjust the load and deflection of a washer stack by adding or removing individual washers and/or the sequence in which they are used, whether in series or parallel.


VARIOUS CONFIGURATIONS OF BELLEVILLE WASHERS




Single
ONE WASHER




Parallel
ALL WASHERS STACKED
THE SAME WAY



Series
ALL WASHERS STACKED
OPPOSITE EACH OTHER




Series Parallel
A COMBINATION
OF THE TWO

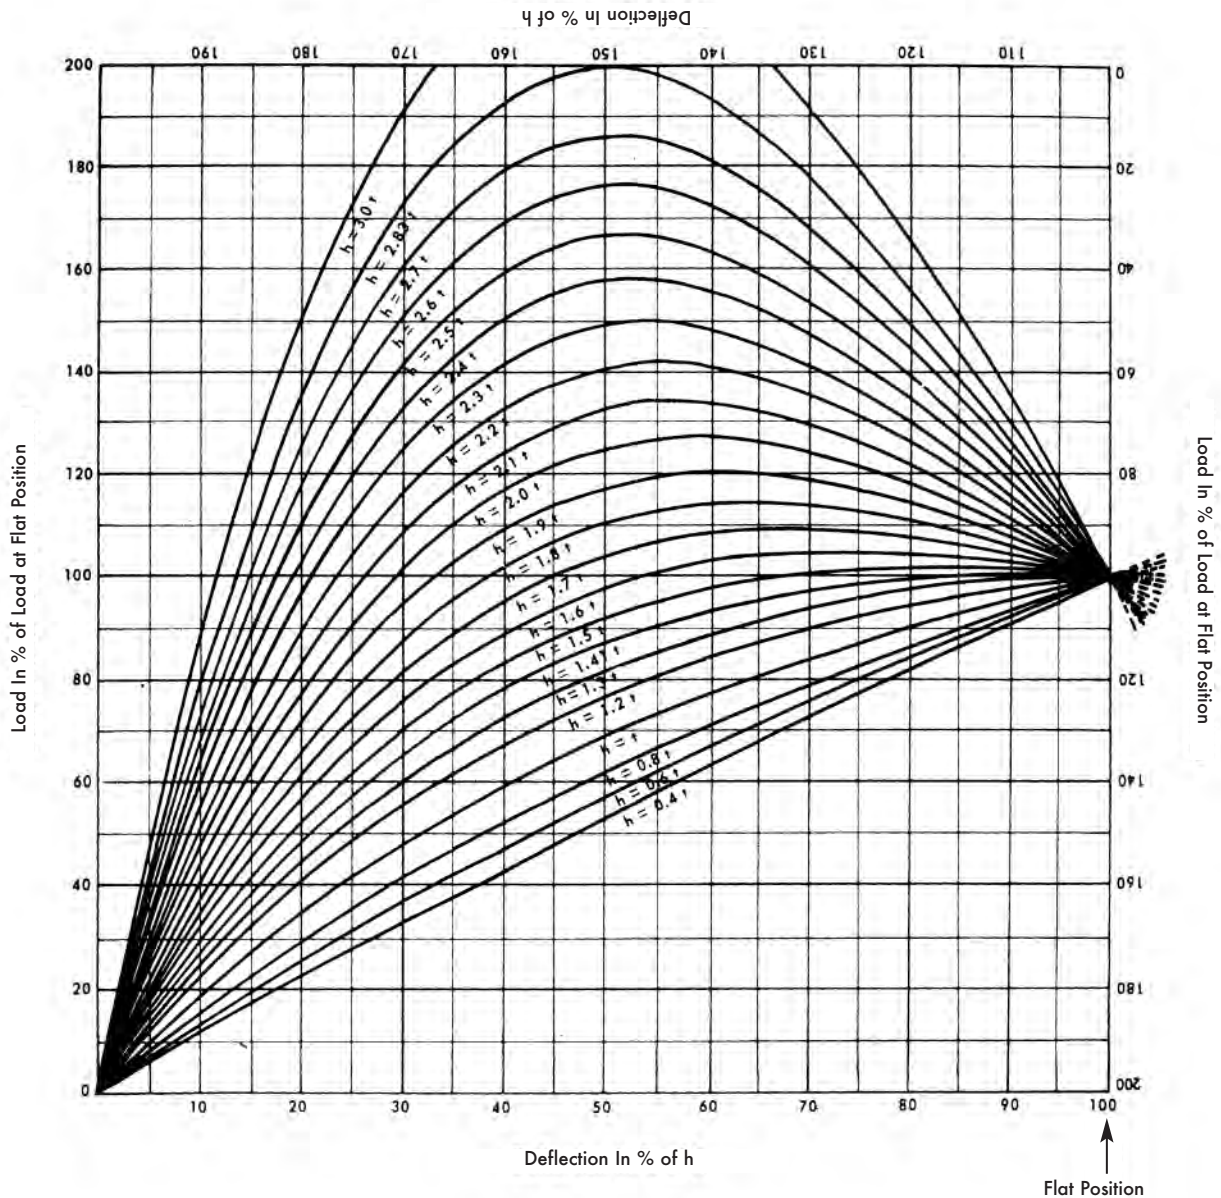

SELECTING BELLEVILLE WASHERS

Lee Spring Belleville Washer part numbers reflect three of the key measurement parameters. As shown in the diagram below the washer part number is configured as follows:

Washer Part Number	093	-005	-188
Measurement Parameters	ID	t	OD

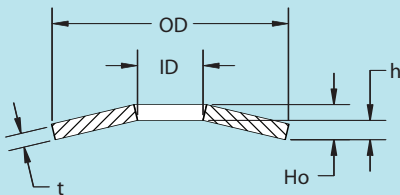

ID Represents the washer inside diameter. This is a **minimum** measurement and reflects the **bolt size** that the washer will accommodate.

t Represents the washer material thickness as well as the washer solid (flat) height.

OD Represents the washer outside diameter. This outside diameter is the **maximum** outside diameter as supplied and prior to loading.

OTHER IMPORTANT CONSIDERATIONS ARE:

Ho Overall Height, unloaded


h $h = Ho - t$


Pmax Load at flat (the load at full compression)


In order to obtain intermediate loads for Belleville Washers, you can use the Load-Deflection diagram above.

LEE STOCK NUMBER	BOLT SIZE	INSIDE DIAMETER (ID)		OUTSIDE DIAMETER (OD)		THICKNESS (t)		OVERALL HEIGHT UNLOADED (Ho)		CALCULATED LOAD AT FLAT (Pmax)		PRICE GROUP
		IN.	MM	IN.	MM	IN.	MM	IN.	MM	LB.	KG	
093-005-188	3/32	.093	2.36	.188	4.78	.005	.13	.014	.36	5.7	2.6	G
093-006-188	3/32	.093	2.36	.188	4.78	.006	.15	.015	.38	9.8	4.5	G
093-007-188	3/32	.093	2.36	.188	4.78	.007	.18	.014	.36	12.2	5.5	G
093-009-188	3/32	.093	2.36	.188	4.78	.009	.23	.014	.36	18.4	8.4	G
093-010-188	3/32	.093	2.36	.188	4.78	.010	.25	.015	.38	25.3	11.5	G
125-008-250	1/8	.125	3.18	.250	6.35	.008	.20	.016	.41	11.8	5.4	F
125-013-250	1/8	.125	3.18	.250	6.35	.013	.33	.020	.51	44.3	20.1	F
138-010-281	#6	.138	3.51	.281	7.14	.010	.25	.020	.51	22.6	10.2	F
138-013-281	#6	.138	3.51	.281	7.14	.013	.33	.021	.53	39.7	18.0	F
138-015-281	#6	.138	3.51	.281	7.14	.015	.38	.023	.58	60.9	27.6	F
148-015-281	#6	.148	3.76	.281	7.14	.015	.38	.024	.61	71.4	32.4	F
156-009-312	5/32	.156	3.96	.312	7.92	.009	.23	.020	.51	14.8	6.7	F
156-010-312	5/32	.156	3.96	.312	7.92	.010	.25	.020	.51	18.5	8.4	F
156-011-312	5/32	.156	3.96	.312	7.92	.011	.28	.022	.55	26.1	11.8	F
156-015-312	5/32	.156	3.96	.312	7.92	.015	.38	.023	.58	49.9	22.6	F
156-017-312	5/32	.156	3.96	.312	7.92	.017	.43	.025	.64	72.6	32.9	F
187-012-375	3/16	.187	4.75	.375	9.53	.012	.30	.024	.61	26.5	12.0	F
187-015-375	3/16	.187	4.75	.375	9.53	.015	.38	.025	.64	43.1	19.6	F
187-017-375	3/16	.187	4.75	.375	9.53	.017	.43	.026	.66	56.5	25.6	F
187-020-375	3/16	.187	4.75	.375	9.53	.020	.51	.029	.74	92.0	41.7	F
187-022-375	3/16	.187	4.75	.375	9.53	.022	.56	.030	.76	108.8	49.3	F
187-030-375	3/16	.187	4.75	.375	9.53	.030	.76	.036	.91	206.9	93.9	F
187-020-562	3/16	.187	4.75	.562	14.27	.020	.48	.037	.94	69.0	31.3	F
187-028-562	3/16	.187	4.75	.562	14.27	.028	.71	.042	1.07	156.0	70.8	F
218-020-437	#12	.218	5.54	.437	11.10	.020	.51	.032	.81	90.3	41.0	F
218-023-437	#12	.218	5.54	.437	11.10	.023	.58	.034	.86	125.9	57.1	F
218-035-687	#12	.218	5.54	.687	17.45	.035	.86	.050	1.27	217.7	98.8	F
250-017-500	1/4	.250	6.35	.500	12.70	.017	.43	.029	.74	42.4	19.2	F
250-018-500	1/4	.250	6.35	.500	12.70	.018	.46	.030	.76	50.4	22.8	F
250-020-500	1/4	.250	6.35	.500	12.70	.020	.51	.032	.81	69.1	31.3	F
250-023-500	1/4	.250	6.35	.500	12.70	.023	.58	.036	.91	113.8	51.6	F
250-024-500	1/4	.250	6.35	.500	12.70	.024	.61	.038	.97	139.3	63.2	F
250-025-500	1/4	.250	6.35	.500	12.70	.025	.64	.039	.99	157.4	71.4	F
250-038-500	1/4	.250	6.35	.500	12.70	.038	.97	.047	1.19	355.3	161.2	G
250-042-562	1/4	.250	6.35	.562	14.27	.042	1.07	.055	1.40	520.0	235.8	G
250-052-687	1/4	.250	6.35	.687	17.45	.052	1.32	.069	1.75	820.9	372.3	G
250-025-750	1/4	.250	6.35	.750	19.05	.025	.64	.049	1.24	106.9	48.5	G
250-052-750	1/4	.250	6.35	.750	19.05	.052	1.32	.065	1.65	521.1	236.3	G
250-070-937	1/4	.250	6.35	.937	23.80	.070	1.78	.100	2.54	1868.9	847.6	G

 Single Disk

 Parallel

 Series

 Series Parallel

SPECIAL INSTRUCTIONS FOR BELLEVILLE SPRING WASHERS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

BELLEVILLE SPRING WASHERS

300 SERIES • Stainless Steel (Passivated)

LEE STOCK NUMBER	BOLT SIZE	INSIDE DIAMETER (ID)		OUTSIDE DIAMETER (OD)		THICKNESS (t)		OVERALL HEIGHT UNLOADED (Ho)		CALCULATED LOAD AT FLAT (Pmax)		PRICE GROUP
		IN.	MM	IN.	MM	IN.	MM	IN.	MM	LB.	KG	
312-024-625	5/16	.312	7.92	.625	15.88	.024	.61	.040	1.02	101.8	46.2	F
312-030-625	5/16	.312	7.92	.625	15.88	.030	.76	.044	1.12	173.9	78.9	F
312-031-625	5/16	.312	7.92	.625	15.88	.031	.76	.048	1.22	233.0	105.7	F
312-047-625	5/16	.312	7.92	.625	15.88	.047	1.19	.059	1.50	573.2	260.0	K
312-052-687	5/16	.312	7.92	.687	17.45	.052	1.32	.068	1.73	819.3	371.6	K
312-040-875	5/16	.312	7.92	.875	22.23	.040	1.02	.057	1.45	229.6	104.1	L
312-030-937	5/16	.312	7.92	.937	23.80	.030	.76	.060	1.52	147.9	67.1	M
312-045-937	5/16	.312	7.92	.937	23.80	.045	1.14	.067	1.70	366.1	166.1	M
312-070-937	5/16	.312	7.92	.937	23.80	.070	1.78	.094	2.39	1503.5	682.0	M
312-080-1000	5/16	.312	7.92	1.000	25.40	.080	2.03	.111	2.82	2533.9	1149.4	N
375-028-750	3/8	.375	9.53	.750	19.05	.028	.71	.042	1.07	98.3	44.6	G
375-030-750	3/8	.375	9.53	.750	19.05	.030	.76	.044	1.12	120.9	54.8	G
375-035-750	3/8	.375	9.53	.750	19.05	.035	.89	.055	1.40	274.2	124.4	G
375-038-750	3/8	.375	9.53	.750	19.05	.038	.97	.048	1.22	175.5	79.6	G
375-040-750	3/8	.375	9.53	.750	19.05	.040	1.02	.059	1.50	388.9	176.4	G
375-042-750	3/8	.375	9.53	.750	19.05	.042	1.07	.052	1.32	236.9	107.5	G
375-044-750	3/8	.375	9.53	.750	19.05	.044	1.12	.054	1.37	272.4	123.6	G
375-057-750	3/8	.375	9.53	.750	19.05	.057	1.45	.070	1.78	769.9	349.2	K
375-062-750	3/8	.375	9.53	.750	19.05	.062	1.57	.078	1.98	1219.4	553.1	K
375-080-1000	3/8	.375	9.53	1.000	25.40	.080	2.03	.109	2.77	2418.8	1099.7	K
375-078-1125	3/8	.375	9.53	1.125	28.58	.078	1.98	.097	2.46	1142.5	518.2	K
437-031-875	7/16	.437	11.10	.875	22.23	.031	.79	.059	1.50	195.9	88.8	G
437-042-875	7/16	.437	11.10	.875	22.23	.042	1.07	.062	1.57	347.9	157.8	G
437-035-1000	7/16	.437	11.10	1.000	25.40	.035	.89	.067	1.70	232.5	105.4	G
437-040-1000	7/16	.437	11.10	1.000	25.40	.040	1.02	.071	1.80	336.2	152.5	G
437-050-1000	7/16	.437	11.10	1.000	25.40	.050	1.27	.085	2.16	741.3	336.3	K
437-080-1000	7/16	.437	11.10	1.000	25.40	.080	2.03	.106	2.69	2255.6	1023.1	K
500-033-1000	1/2	.500	12.70	1.000	25.40	.033	.84	.052	1.32	122.8	55.7	G
500-035-1000	1/2	.500	12.70	1.000	25.40	.035	.89	.057	1.45	169.7	77.0	G
500-045-1000	1/2	.500	12.70	1.000	25.40	.045	1.14	.061	1.55	262.3	118.9	K
500-050-1000	1/2	.500	12.70	1.000	25.40	.050	1.27	.075	1.91	562.1	254.9	K
500-073-1000	1/2	.500	12.70	1.000	25.40	.073	1.85	.091	2.31	1259.6	571.2	L
500-080-1000	1/2	.500	12.70	1.000	25.40	.080	2.03	.103	2.62	2118.3	960.7	L
500-030-1375	1/2	.500	12.70	1.375	34.93	.030	.76	.066	1.68	83.3	37.8	L
500-032-1375	1/2	.500	12.70	1.375	34.93	.032	.81	.070	1.78	106.7	48.4	L
500-047-1500	1/2	.500	12.70	1.500	38.10	.047	1.19	.093	2.36	340.4	154.4	R
500-070-1500	1/2	.500	12.70	1.500	38.10	.070	1.78	.104	2.64	831.2	377.0	R
500-080-1500	1/2	.500	12.70	1.500	38.10	.080	2.03	.098	2.49	656.9	297.9	R
531-062-1125	17/32	.531	13.49	1.125	28.58	.062	1.57	.083	2.11	690.9	313.3	T
531-062-1250	17/32	.531	13.49	1.250	31.75	.062	1.57	.092	2.34	768.2	348.4	T
531-078-1250	17/32	.531	13.49	1.250	31.75	.078	1.98	.103	2.62	1274.7	578.1	T
562-038-1125	9/16	.562	14.27	1.125	28.58	.038	.97	.073	1.85	272.8	123.8	K
562-057-1125	9/16	.562	14.27	1.125	28.58	.057	1.45	.084	2.13	710.3	322.2	M

SPECIAL INSTRUCTIONS FOR BELLEVILLE SPRING WASHERS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.


LEE STOCK NUMBER	BOLT SIZE	INSIDE DIAMETER (ID)		OUTSIDE DIAMETER (OD)		THICKNESS (t)		OVERALL HEIGHT UNLOADED (Ho)		CALCULATED LOAD AT FLAT (Pmax)		PRICE GROUP
		IN.	MM	IN.	MM	IN.	MM	IN.	MM	LB.	KG	
625-050-1125	5/8	.625	15.88	1.125	28.58	.050	1.27	.068	1.73	343.2	155.7	U
625-040-1250	5/8	.625	15.88	1.250	31.75	.040	1.02	.082	2.08	309.5	140.3	T
625-062-1250	5/8	.625	15.88	1.250	31.75	.062	1.57	.092	2.34	823.1	373.3	T
625-050-1375	5/8	.625	15.88	1.375	34.93	.050	1.27	.095	2.41	511.5	232.0	T
625-062-1375	5/8	.625	15.88	1.375	34.93	.062	1.57	.110	2.79	1040.3	471.8	T
625-078-1375	5/8	.625	15.88	1.375	34.93	.078	1.98	.100	2.54	949.4	430.6	T
625-062-1625	5/8	.625	15.88	1.625	41.28	.062	1.57	.084	2.13	325.0	147.4	Y
625-057-1875	5/8	.625	15.88	1.875	47.63	.057	1.45	.115	2.92	490.0	222.2	Y
750-040-1500	3/4	.750	19.05	1.500	38.10	.040	1.02	.068	1.73	143.3	65.0	Y
750-045-1500	3/4	.750	19.05	1.500	38.10	.045	1.14	.093	2.36	349.7	158.6	Y
875-057-1750	7/8	.875	22.23	1.750	44.45	.057	1.45	.114	2.90	620.0	281.2	Z
1000-065-2000	1	1.000	25.40	2.000	50.80	.065	1.65	.130	3.30	802.7	364.1	AA
1000-078-2000	1	1.000	25.40	2.000	50.80	.078	1.98	.138	3.51	1280.4	580.7	AA
1000-078-2375	1	1.000	25.40	2.375	60.33	.078	1.98	.157	3.99	1112.8	504.7	AM
1125-073-2250	1 1/8	1.125	28.58	2.250	57.15	.073	1.85	.148	3.76	1036.7	470.2	AN
1250-080-2500	1 1/4	1.250	31.75	2.500	63.50	.080	2.03	.160	4.06	1178.9	534.6	AZL




Single Disk



Parallel



Series



Series Parallel

SPECIAL INSTRUCTIONS FOR BELLEVILLE SPRING WASHERS


PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

Lee offers Constant Force Springs in four Life Cycle ranges. Each spring is a roll of high yield Type 301 Stainless Steel strip exerting a nearly constant restraining force to resist uncoiling. When the strip is extended, the inherent stress resists the loading force at a nearly constant rate.

Guide to Mounting Constant Force Springs

A Constant Force Spring is usually mounted by first tightly wrapping it on a drum, then attaching the free end to the loading force such as in a counterbalance application. This relationship can also be reversed.

- The drum diameter should be 10 to 20% larger than its natural diameter.
- One and one-half wraps should remain on the drum at maximum extension.
- The strip becomes unstable at long extensions and should be guided to prevent twisting or kinking on recoil.
- Idler pulleys must be larger in diameter than the natural diameter and should never be used to cause back-bending against the natural radius of curvature.

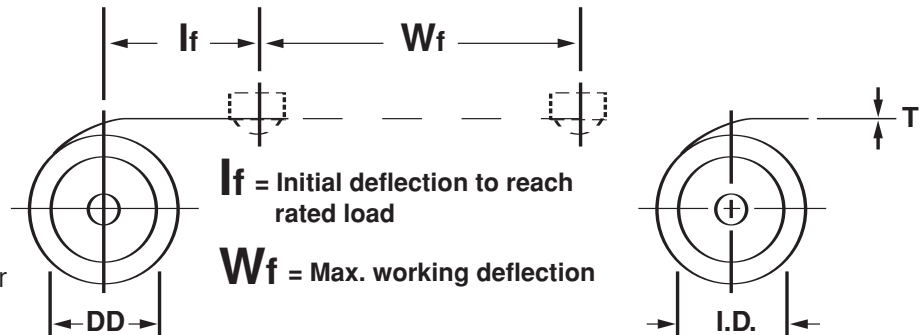

2500 Life Cycles

LEE SPRING STOCK NUMBER	LIFE CYCLES	THICKNESS (T)		WIDTH (W)		LENGTH (L)		INITIAL DEFLECTION (If)		WORKING DEFLECTION (Wf)		INSIDE DIAMETER (ID)		DRUM DIAMETER (DD)		LOAD (P)	
		IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	LB	KG
LCF 025 04 025S	2500	0.004	0.10	0.250	6.35	14	356	0.52	13.21	12	305	0.297	7.54	0.349	8.86	0.660	0.30
LCF 025 05 031S	2500	0.005	0.13	0.313	7.94	15	381	0.65	16.51	12	305	0.359	9.12	0.436	11.07	1.030	0.47
LCF 025 06 038S	2500	0.006	0.15	0.375	9.53	21	533	0.78	19.81	18	457	0.438	11.13	0.523	13.28	1.480	0.67
LCF 025 06 050S	2500	0.006	0.15	0.500	12.70	21	533	0.78	19.81	18	457	0.438	11.11	0.523	13.28	1.970	0.89
LCF 025 08 050S	2500	0.008	0.20	0.500	12.70	28	711	1.06	26.92	24	610	0.578	14.68	0.697	17.70	2.630	1.19
LCF 025 10 063S	2500	0.010	0.25	0.625	15.88	29	737	1.31	33.27	24	610	0.734	18.65	0.873	22.17	4.120	1.87
LCF 025 12 075S	2500	0.012	0.30	0.750	19.05	36	914	1.56	39.62	30	762	0.875	22.23	1.050	26.67	5.940	2.69
LCF 025 12 100S	2500	0.012	0.30	1.000	25.40	36	914	1.56	39.62	30	762	0.875	22.23	1.050	26.67	7.920	3.59
LCF 025 16 100S	2500	0.016	0.41	1.000	25.40	38	965	2.10	53.34	30	762	1.156	29.37	1.400	35.56	10.600	4.81
LCF 025 20 125S	2500	0.020	0.51	1.250	31.75	47	1194	2.60	66.04	36	914	1.469	37.31	1.750	44.45	16.500	7.48

4000 Life Cycles

LEE SPRING STOCK NUMBER	LIFE CYCLES	THICKNESS (T)		WIDTH (W)		LENGTH (L)		INITIAL DEFLECTION (If)		WORKING DEFLECTION (Wf)		INSIDE DIAMETER (ID)		DRUM DIAMETER (DD)		LOAD (P)	
		IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	LB	KG
LCF 040 04 025S	4000	0.004	0.10	0.250	6.35	15	381	0.61	15.49	12	305	0.340	8.64	0.400	10.16	0.500	0.23
LCF 040 05 031S	4000	0.005	0.13	0.313	7.94	17	432	0.75	19.05	12	305	0.370	9.40	0.500	12.70	1.030	0.47
LCF 040 06 038S	4000	0.006	0.15	0.375	9.53	24	610	0.94	23.88	18	457	0.450	11.43	0.620	15.75	1.480	0.67
LCF 040 06 050S	4000	0.006	0.15	0.500	12.70	25	635	0.97	24.64	18	457	0.450	11.43	0.650	16.51	1.970	0.89
LCF 040 08 050S	4000	0.008	0.20	0.500	12.70	30	762	1.24	31.50	24	610	0.590	14.99	0.820	20.83	2.630	1.19
LCF 040 10 063S	4000	0.010	0.25	0.625	15.88	33	838	1.49	37.85	24	610	0.730	18.54	0.990	25.15	4.120	1.87
LCF 040 12 075S	4000	0.012	0.30	0.750	19.05	39	991	1.79	45.47	30	762	0.880	22.35	1.190	30.23	5.940	2.69
LCF 040 12 100S	4000	0.012	0.30	1.000	25.40	39	991	1.80	45.72	30	762	0.880	22.35	1.200	30.48	7.920	3.59
LCF 040 16 100S	4000	0.016	0.41	1.000	25.40	40	1016	2.28	57.91	30	762	1.200	30.48	1.520	38.61	10.600	4.81
LCF 040 20 125S	4000	0.020	0.51	1.250	31.75	50	1270	2.83	71.88	36	914	1.470	37.34	1.890	48.01	16.500	7.48

SPECIAL INSTRUCTIONS FOR CONSTANT FORCE SPRINGS

PRICING: See Page 218 for 10-199 pricing. To price or order up to 599 pieces, visit www.leespring.com; 600+ pieces, contact Lee Spring.
CUSTOM DESIGNS: Constant Force Springs custom designs are available on request; see Custom Springs Section for Constant Force Springs RFQ form.

SPECIALTY STOCK PARTS: CONSTANT FORCE SPRINGS

Type 301 High Yield Stainless Steel

13000 Life Cycles

LEE SPRING STOCK NUMBER	LIFE CYCLES	THICKNESS (T)		WIDTH (W)		LENGTH (L)		INITIAL DEFLECTION (If)		WORKING DEFLECTION (Wf)		INSIDE DIAMETER (ID)		DRUM DIAMETER (DD)		LOAD (P)	
		IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	LB	KG
LCF 130 04 025S	13000	0.004	0.10	0.250	6.35	15	381	0.80	20.32	12	305	0.438	11.13	0.533	13.54	0.320	0.15
LCF 130 05 031S	13000	0.005	0.13	0.313	7.94	16	406	1.00	25.40	12	305	0.563	14.30	0.665	16.89	0.490	0.22
LCF 130 06 038S	13000	0.006	0.15	0.375	9.53	23	584	1.20	30.48	18	457	0.672	17.07	0.798	20.27	0.710	0.32
LCF 130 06 050S	13000	0.006	0.15	0.500	12.70	23	584	1.20	30.48	18	457	0.672	17.07	0.798	20.27	0.950	0.43
LCF 130 08 050S	13000	0.008	0.20	0.500	12.70	30	762	1.59	40.39	24	610	0.875	22.23	1.060	26.92	1.260	0.57
LCF 130 10 063S	13000	0.010	0.25	0.625	15.88	32	813	2.00	50.80	24	610	1.109	28.18	1.330	33.78	1.980	0.90
LCF 130 12 075S	13000	0.012	0.30	0.750	19.05	40	1016	2.38	60.45	30	762	1.344	34.13	1.590	40.39	2.840	1.29
LCF 130 12 100S	13000	0.012	0.30	1.000	25.40	40	1016	2.38	60.45	30	762	1.344	34.13	1.590	40.39	3.790	1.72
LCF 130 15 100S	13000	0.015	0.38	1.000	25.40	42	1067	2.98	75.69	30	762	1.672	42.47	1.990	50.55	4.740	2.15
LCF 130 20 125S	13000	0.020	0.51	1.250	31.75	52	1321	3.97	100.84	36	914	2.219	56.36	2.650	67.31	9.480	4.30

25000 Life Cycles

LEE SPRING STOCK NUMBER	LIFE CYCLES	THICKNESS (T)		WIDTH (W)		LENGTH (L)		INITIAL DEFLECTION (If)		WORKING DEFLECTION (Wf)		INSIDE DIAMETER (ID)		DRUM DIAMETER (DD)		LOAD (P)	
		IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	LB	KG
LCF 250 04 025S	25000	0.004	0.10	0.250	6.35	22	559	0.88	22.35	18	457	0.530	13.46	0.590	14.99	0.230	0.10
LCF 250 05 038S	25000	0.005	0.13	0.375	9.53	29	737	1.09	27.69	24	610	0.650	16.51	0.730	18.54	0.430	0.20
LCF 250 06 038S	25000	0.006	0.15	0.375	9.53	30	762	1.30	33.02	24	610	0.770	19.56	0.860	21.84	0.520	0.24
LCF 250 06 050S	25000	0.006	0.15	0.500	12.70	30	762	1.36	34.54	24	610	0.800	20.32	0.900	22.86	0.700	0.32
LCF 250 08 050S	25000	0.008	0.20	0.500	12.70	38	965	1.80	45.72	30	762	1.070	27.18	1.200	30.48	0.930	0.42
LCF 250 10 063S	25000	0.010	0.25	0.625	15.88	40	1016	2.28	57.91	30	762	1.360	34.54	1.520	38.61	1.460	0.66
LCF 250 12 075S	25000	0.012	0.30	0.750	19.05	48	1219	2.69	68.33	36	914	1.600	40.64	1.790	45.47	2.090	0.95
LCF 250 12 100S	25000	0.012	0.30	1.000	25.40	48	1219	2.69	68.33	36	914	1.600	40.64	1.790	45.47	2.800	1.27
LCF 250 15 100S	25000	0.015	0.38	1.000	25.40	56	1422	3.30	83.82	42	1067	1.960	49.78	2.200	55.88	3.500	1.59
LCF 250 20 125S	25000	0.020	0.51	1.250	31.75	60	1524	4.25	107.95	42	1067	2.530	64.26	2.830	71.88	5.830	2.64

HOW TO DETERMINE LEE CONSTANT FORCE SPRING PRICING:

1. Select the spring you want by LEE STOCK NUMBER.
2. Read across to the PRICE GROUP to obtain price code number.
3. Refer to the PRICE GROUP below for quantities from 10-199 of any items.
4. Minimum Order: 10 of the same Lee Stock Number per Constant Force Spring ordered.
5. Prices shown are per spring per quantity; quantities cannot be combined to lower item pricing.
6. Prices effective January 2011; Terms Net 30 Days.

7. Small Order Shipping & Processing Charge: Prices for 1-9 pieces of the same Lee Stock Number will be charged at the 10 pieces price, plus an additional \$20.00 Shipping & Processing Charge per order.
8. For pricing or to place on-line orders of up to 599 pieces of an item, visit www.leespring.com. For pricing of 600 pieces and above, please submit a request through www.leespring.com or contact us by email, phone or fax.

FREE SHIPPING
on orders of
10 pieces
or more

CONSTANT FORCE
SPRINGS

Lee Stock Number	10 - 19	20 - 49	50 - 99	100 - 199
LCF 025 04 025S	\$ 4.06	\$ 3.12	\$ 2.96	\$ 2.79
LCF 025 05 031S	\$ 4.23	\$ 3.25	\$ 3.09	\$ 2.90
LCF 025 06 038S	\$ 4.43	\$ 3.41	\$ 3.24	\$ 3.05
LCF 025 06 050S	\$ 4.65	\$ 3.58	\$ 3.40	\$ 3.20
LCF 025 08 050S	\$ 5.28	\$ 4.06	\$ 3.86	\$ 3.63
LCF 025 10 063S	\$ 6.05	\$ 4.65	\$ 4.42	\$ 4.15
LCF 025 12 075S	\$ 6.46	\$ 4.97	\$ 4.72	\$ 4.44
LCF 025 12 100S	\$ 7.75	\$ 5.96	\$ 5.66	\$ 5.32
LCF 025 16 100S	\$ 10.82	\$ 8.32	\$ 7.90	\$ 7.43
LCF 025 20 125S	\$ 14.24	\$ 10.95	\$ 10.40	\$ 9.78
LCF 040 04 025S	\$ 4.26	\$ 3.28	\$ 3.11	\$ 2.93
LCF 040 05 031S	\$ 4.44	\$ 3.41	\$ 3.24	\$ 3.05
LCF 040 06 038S	\$ 4.65	\$ 3.58	\$ 3.40	\$ 3.20
LCF 040 06 050S	\$ 4.89	\$ 3.76	\$ 3.57	\$ 3.36
LCF 040 08 050S	\$ 5.54	\$ 4.26	\$ 4.05	\$ 3.81
LCF 040 10 063S	\$ 6.35	\$ 4.88	\$ 4.64	\$ 4.36
LCF 040 12 075S	\$ 6.78	\$ 5.22	\$ 4.96	\$ 4.66
LCF 040 12 100S	\$ 8.14	\$ 6.26	\$ 5.95	\$ 5.59
LCF 040 16 100S	\$ 11.36	\$ 8.74	\$ 8.30	\$ 7.80
LCF 040 20 125S	\$ 14.95	\$ 11.50	\$ 10.92	\$ 10.27

Lee Stock Number	10 - 19	20 - 49	50 - 99	100 - 199
LCF 130 04 025S	\$ 4.47	\$ 3.44	\$ 3.27	\$ 3.07
LCF 130 05 031S	\$ 4.66	\$ 3.58	\$ 3.40	\$ 3.20
LCF 130 06 038S	\$ 4.89	\$ 3.76	\$ 3.57	\$ 3.36
LCF 130 06 050S	\$ 5.13	\$ 3.95	\$ 3.75	\$ 3.52
LCF 130 08 050S	\$ 5.82	\$ 4.48	\$ 4.25	\$ 4.00
LCF 130 10 063S	\$ 6.66	\$ 5.13	\$ 4.87	\$ 4.58
LCF 130 12 075S	\$ 7.12	\$ 5.48	\$ 5.21	\$ 4.89
LCF 130 12 100S	\$ 8.54	\$ 6.57	\$ 6.24	\$ 5.87
LCF 130 15 100S	\$ 11.92	\$ 9.17	\$ 8.71	\$ 8.19
LCF 130 20 125S	\$ 15.69	\$ 12.07	\$ 11.47	\$ 10.78
LCF 250 04 025S	\$ 4.70	\$ 3.61	\$ 3.43	\$ 3.23
LCF 250 05 038S	\$ 4.89	\$ 3.76	\$ 3.57	\$ 3.36
LCF 250 06 038S	\$ 5.13	\$ 3.95	\$ 3.75	\$ 3.53
LCF 250 06 050S	\$ 5.39	\$ 4.14	\$ 3.94	\$ 3.70
LCF 250 08 050S	\$ 6.11	\$ 4.70	\$ 4.46	\$ 4.20
LCF 250 10 063S	\$ 7.00	\$ 5.38	\$ 5.11	\$ 4.81
LCF 250 12 075S	\$ 7.48	\$ 5.75	\$ 5.47	\$ 5.14
LCF 250 12 100S	\$ 8.97	\$ 6.90	\$ 6.55	\$ 6.16
LCF 250 15 100S	\$ 12.52	\$ 9.63	\$ 9.15	\$ 8.60
LCF 250 20 125S	\$ 16.48	\$ 12.68	\$ 12.04	\$ 11.32

Lee Spring offers our unique line of Battery Springs in a choice of nickel coated music wire or silver coated beryllium copper. Since most alkaline batteries have nickel coated containers, a nickel coated contact is suitable. The use of similar materials removes the possibility of galvanic corrosion and aids in wear resistance. Nickel will also tend to wipe and aid in breaking down the oxide that can form on the battery contact surface. In addition, a nickel coating will provide general corrosion resistance and is a good conductor of electricity.

Beryllium copper is among the hardest, strongest, and most wear-resistant of copper alloys. Silver coating further enhances electrical and thermal conductivity. The electric conductivity is 65 to 70% that of copper, and the strength and fatigue resistance are comparable with higher beryllium alloys. The light silver-plating allows for easy soldering. Beryllium copper is corrosion resistant in various environments, and is both non-magnetic and non-sparking.




INTERIOR MOUNT BATTERY SPRINGS

Music Wire (Nickel Coated)

LEE STOCK NUMBER	BATTERY SIZE	WIRE DIAMETER		OD BASE		ID TOP		FREE LENGTH		ID EYELET		APPROX LOAD		@ INSTALLED HEIGHT		CENTER TO CENTER LENGTH		PRICE CODE
		IN.	MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	IN.	MM	
LB 024A 01 AA	AA	0.024	0.61	0.390	9.91	0.220	5.59	0.440	11.18	0.110	2.79	1.750	0.79	0.142	3.61	N/A	N/A	J
LB 024A 01 AAA	AAA	0.024	0.61	0.360	9.14	0.160	4.06	0.355	9.02	0.110	2.79	1.500	0.68	0.195	4.95	N/A	N/A	J
LB 032A 01 C	C	0.032	0.81	0.540	13.72	0.330	8.38	0.520	13.21	0.175	4.45	1.000	0.45	0.340	8.64	N/A	N/A	J
LB 036A 01 D	D	0.036	0.91	0.660	16.76	0.360	9.14	0.720	18.29	0.175	4.45	3.000	1.36	0.175	4.45	N/A	N/A	J

Beryllium Copper (Silver Coated)

LEE STOCK NUMBER	BATTERY SIZE	WIRE DIAMETER		OD BASE		ID TOP		FREE LENGTH		ID EYELET		APPROX LOAD		@ INSTALLED HEIGHT		CENTER TO CENTER LENGTH		PRICE CODE
		IN.	MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	IN.	MM	
LBC 028A 01 AA	AA	0.028	0.71	0.390	9.91	0.220	5.59	0.440	11.18	0.110	2.79	1.750	0.79	0.142	3.61	N/A	N/A	R
LBC 028A 01 AAA	AAA	0.028	0.71	0.360	9.14	0.160	4.06	0.355	9.02	0.110	2.79	1.500	0.68	0.195	4.95	N/A	N/A	R
LBC 038A 01 C	C	0.038	0.97	0.540	13.72	0.330	8.38	0.520	13.21	0.175	4.45	1.000	0.45	0.340	8.64	N/A	N/A	T
LBC 040A 01 D	D	0.040	1.02	0.660	16.76	0.360	9.14	0.720	18.29	0.175	4.45	3.000	1.36	0.175	4.45	N/A	N/A	Z

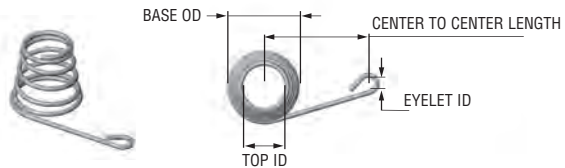

EXTERIOR MOUNT BATTERY SPRINGS

Music Wire (Nickel Coated)


LEE STOCK NUMBER	BATTERY SIZE	WIRE DIAMETER		OD BASE		ID TOP		FREE LENGTH		ID EYELET		APPROX LOAD		@ INSTALLED HEIGHT		CENTER TO CENTER LENGTH		PRICE CODE
		IN.	MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	IN.	MM	
LB 024B 01 AA	AA	0.024	0.61	0.390	9.91	0.220	5.59	0.440	11.18	0.110	2.79	1.750	0.79	0.142	3.61	0.545	13.84	J
LB 024B 01 AAA	AAA	0.024	0.61	0.360	9.14	0.160	4.06	0.355	9.02	0.110	2.79	1.500	0.68	0.195	4.95	0.478	12.14	J
LB 032B 01 C	C	0.032	0.81	0.540	13.72	0.330	8.38	0.520	13.21	0.175	4.45	1.000	0.45	0.340	8.64	0.984	24.99	J
LB 036B 01 D	D	0.036	0.91	0.660	16.76	0.360	9.14	0.720	18.29	0.175	4.45	3.000	1.36	0.175	4.45	1.218	30.94	J

Beryllium Copper (Silver Coated)

LEE STOCK NUMBER	BATTERY SIZE	WIRE DIAMETER		OD BASE		ID TOP		FREE LENGTH		ID EYELET		APPROX LOAD		@ INSTALLED HEIGHT		CENTER TO CENTER LENGTH		PRICE CODE
		IN.	MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	IN.	MM	
LBC 028B 01 AA	AA	0.028	0.71	0.390	9.91	0.220	5.59	0.440	11.18	0.110	2.79	1.750	0.79	0.142	3.61	0.545	13.84	R
LBC 028B 01 AAA	AAA	0.028	0.71	0.360	9.14	0.160	4.06	0.355	9.02	0.110	2.79	1.500	0.68	0.195	4.95	0.478	12.14	R
LBC 038B 01 C	C	0.038	0.97	0.540	13.72	0.330	8.38	0.520	13.21	0.175	4.45	1.000	0.45	0.340	8.64	0.984	24.99	T
LBC 040B 01 D	D	0.040	1.02	0.660	16.76	0.360	9.14	0.720	18.29	0.175	4.45	3.000	1.36	0.175	4.45	1.218	30.94	Z

SPECIALTY STOCK PARTS: BATTERY SPRINGS

Music Wire (Nickel Coated) or Beryllium Copper (Silver Coated)

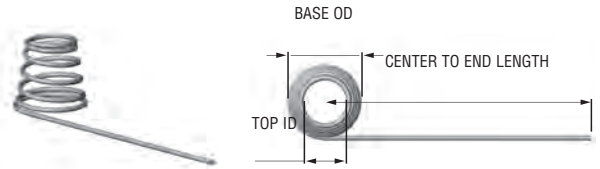


ADAPTABLE MOUNT BATTERY SPRINGS

Music Wire (Nickel Coated)

LEE STOCK NUMBER	BATTERY SIZE	WIRE DIAMETER		OD BASE		ID TOP		FREE LENGTH		ID EYELET		APPROX LOAD		@ INSTALLED HEIGHT		CENTER TO END LENGTH		PRICE CODE
		IN.	MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	IN.	MM	
LB 024C 01 AA	AA	0.024	0.61	0.390	9.91	0.220	5.59	0.440	11.18	N/A	N/A	1.750	0.79	0.142	3.61	3.000	76.20	F
LB 024C 01 AAA	AAA	0.024	0.61	0.360	9.14	0.160	4.06	0.355	9.02	N/A	N/A	1.500	0.68	0.195	4.95	3.000	76.20	F
LB 032C 01 C	C	0.032	0.81	0.540	13.72	0.330	8.38	0.520	13.21	N/A	N/A	1.000	0.45	0.340	8.64	3.000	76.20	F
LB 036C 01 D	D	0.036	0.91	0.660	16.76	0.360	9.14	0.720	18.29	N/A	N/A	3.000	1.36	0.175	4.45	3.000	76.20	F

Beryllium Copper (Silver Coated)

LEE STOCK NUMBER	BATTERY SIZE	WIRE DIAMETER		OD BASE		ID TOP		FREE LENGTH		ID EYELET		APPROX LOAD		@ INSTALLED HEIGHT		CENTER TO END LENGTH		PRICE CODE
		IN.	MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	IN.	MM	
LBC 028C 01 AA	AA	0.028	0.71	0.390	9.91	0.220	5.59	0.440	11.18	N/A	N/A	1.750	0.79	0.142	3.61	3.000	76.20	N
LBC 028C 01 AAA	AAA	0.028	0.71	0.360	9.14	0.160	4.06	0.355	9.02	N/A	N/A	1.500	0.68	0.195	4.95	3.000	76.20	N
LBC 038C 01 C	C	0.038	0.97	0.540	13.72	0.330	8.38	0.520	13.21	N/A	N/A	1.000	0.45	0.340	8.64	3.000	76.20	T
LBC 040C 01 D	D	0.040	1.02	0.660	16.76	0.360	9.14	0.720	18.29	N/A	N/A	3.000	1.36	0.175	4.45	3.000	76.20	AE



DOUBLE MOUNT BATTERY SPRINGS

Music Wire (Silver Coated)

LEE STOCK NUMBER	BATTERY SIZE	WIRE DIAMETER		OD BASE		ID TOP		FREE LENGTH		ID EYELET		APPROX LOAD		@ INSTALLED HEIGHT		CENTER TO CENTER LENGTH		PRICE CODE
		IN.	MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	IN.	MM	
LB 024D 01 AA	AA	0.024	0.61	0.390	9.91	0.220	5.59	0.440	11.18	N/A	N/A	1.750	0.79	0.142	3.61	0.620	15.75	T
LB 024D 01 AAA	AAA	0.024	0.61	0.360	9.14	0.160	4.06	0.355	9.02	N/A	N/A	1.500	0.68	0.195	4.95	0.466	11.84	T
LB 032D 01 C	C	0.032	0.81	0.540	13.72	0.330	8.38	0.520	13.21	N/A	N/A	1.000	0.45	0.340	8.64	1.070	27.18	T
LB 036D 01 D	D	0.036	0.91	0.660	16.76	0.360	9.14	0.720	18.29	N/A	N/A	3.000	1.36	0.175	4.45	1.340	34.04	T

Beryllium Copper (Silver Coated)

LEE STOCK NUMBER	BATTERY SIZE	WIRE DIAMETER		OD BASE		ID TOP		FREE LENGTH		ID EYELET		APPROX LOAD		@ INSTALLED HEIGHT		CENTER TO CENTER LENGTH		PRICE CODE
		IN.	MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM	LB.	KG	IN.	MM	IN.	MM	
LBC 028D 01 AA	AA	0.028	0.71	0.390	9.91	0.220	5.59	0.440	11.18	N/A	N/A	1.750	0.79	0.142	3.61	0.620	15.75	W
LBC 028D 01 AAA	AAA	0.028	0.71	0.360	9.14	0.160	4.06	0.355	9.02	N/A	N/A	1.500	0.68	0.195	4.95	0.466	11.84	AA
LBC 038D 01 C	C	0.038	0.97	0.540	13.72	0.330	8.38	0.520	13.21	N/A	N/A	1.000	0.45	0.340	8.64	1.070	27.18	AJ
LBC 040D 01 D	D	0.040	1.02	0.660	16.76	0.360	9.14	0.720	18.29	N/A	N/A	3.000	1.36	0.175	4.45	1.340	34.04	AO

Continuous Length Stock Extension Springs in Three Lengths: 12" - 24" - 36"

Wire Diameters and Outside Diameters match Lee Spring's most popular Stock Extension Spring dimensions. Over 260 designs available. Other designs not shown in this section are available exclusively at www.leespring.com.

- Excellent for prototype development or maintenance applications.
- Wire Diameter and Outside Diameters match Lee Spring's most popular Stock Extension Spring dimensions.
- Select Music Wire with Light Oil Coat or 302 Stainless Steel.
- Available in 12", 24" or 36" lengths.
- Designed to be cut to required length by user to meet load requirements.
- Various loops or hooks can be formed on the ends using looping pliers or other appropriate instruments.
- All Continuous Length Springs are Right Hand Wound.
- To determine the spring rate per inch of extension at the final cut length, use the following formula:

$$\text{Rate} = \frac{K}{N} \quad (K = \text{Stiffness})$$

$$N \quad (N = \text{Number of Coils per Inch X Length in Inches})$$
- To determine load at an extended length, multiply deflection by the spring rate.
- Minimum order: 10 pieces of an item.

Step 1



Fold Spring 180° at desired length and cut. Cut shorter than needed by one-half the coil body diameter.

Step 2



Across from cut end, bend last coil up at 45° angle. To form double loop, bend last two coils up 45°. Do not use heat!



Step 3



Twist cut end of loop into center of coil body. This may require pliers. You may have to twist past center to allow the loop to flex back.

Step 4



Cut end of newly formed loop to obtain any gap needed for mounting.

SPECIALTY STOCK PARTS: CONTINUOUS LENGTH EXTENSION SPRINGS

Music Wire (Light Oil Coated) • 302 Stainless Steel (Natural)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		FREE LENGTH		INITIAL TENSION		APPROX. NUMBER OF COILS/IN.	STIFFNESS K	PRICE GROUP	
	IN.	MM	IN.	MM	IN.	MM	LB.	KG			Music Wire M	#302 Stainless S
LEC014A 12	0.125	3.18	0.014	0.36	12	305	0.12	0.054	71.4	42	AM	AM
LEC014A 24					24	610					AN	AN
LEC014A 36					36	914					AO	AR
LEC016A 12	0.125	3.18	0.016	0.41	12	305	0.20	0.091	62.5	76	AM	AM
LEC016A 24					24	610					AN	AN
LEC016A 36					36	914					AO	AR
LEC018A 12	0.125	3.18	0.018	0.46	12	305	0.30	0.136	55.5	129	AM	AM
LEC018A 24					24	610					AN	AN
LEC018A 36					36	914					AO	AR
LEC022A 12	0.125	3.18	0.022	0.56	12	305	0.45	0.204	45.4	322	AM	AM
LEC022A 24					24	610					AN	AN
LEC022A 36					36	914					AO	AR
LEC018C 12	0.250	6.35	0.018	0.46	12	305	0.10	0.045	55.5	13	AN	AN
LEC018C 24					24	610					AO	AP
LEC018C 36					36	914					AP	AU
LEC022C 12	0.250	6.35	0.022	0.56	12	305	0.20	0.091	45.4	30	AN	AN
LEC022C 24					24	610					AO	AP
LEC022C 36					36	914					AP	AU
LEC026C 12	0.250	6.35	0.026	0.66	12	305	0.40	0.181	38.4	61	AN	AN
LEC026C 24					24	610					AO	AP
LEC026C 36					36	914					AP	AU
LEC029C 12	0.250	6.35	0.029	0.74	12	305	0.55	0.249	34.4	98	AN	AN
LEC029C 24					24	610					AO	AP
LEC029C 36					36	914					AP	AU
LEC034C 12	0.250	6.35	0.034	0.86	12	305	0.85	0.385	29.4	199	AN	AN
LEC034C 24					24	610					AO	AP
LEC034C 36					36	914					AP	AU
LEC037C 12	0.250	6.35	0.037	0.94	12	305	1.00	0.453	27.0	291	AN	AN
LEC037C 24					24	610					AO	AP
LEC037C 36					36	914					AP	AU
LEC041C 12	0.250	6.35	0.041	1.04	12	305	1.05	0.475	24.3	464	AN	AN
LEC041C 24					24	610					AO	AP
LEC041C 36					36	914					AP	AU
LEC026D 12	0.375	9.53	0.026	0.66	12	305	0.22	0.100	38.4	16	AO	AP
LEC026D 24					24	610					AP	AT
LEC026D 36					36	914					AS	AX
LEC039D 12	0.375	9.53	0.039	0.99	12	305	0.80	0.362	25.6	91	AO	AP
LEC039D 24					24	610					AP	AT
LEC039D 36					36	914					AS	AX
LEC045D 12	0.375	9.53	0.045	1.14	12	305	1.20	0.543	22.2	171	AO	AP
LEC045D 24					24	610					AP	AT
LEC045D 36					36	914					AS	AX
LEC052D 12	0.375	9.53	0.052	1.32	12	305	1.75	0.792	19.2	325	AO	AP
LEC052D 24					24	610					AR	AT
LEC052D 36					36	914					AT	AY
LEC055D 12	0.375	9.53	0.055	1.40	12	305	2.00	0.905	18.1	419	AO	AP
LEC055D 24					24	610					AR	AT
LEC055D 36					36	914					AT	AY
LEC058D 12	0.375	9.53	0.058	1.47	12	305	2.50	1.132	17.2	533	AO	AP
LEC058D 24					24	610					AR	AT
LEC058D 36					36	914					AT	AY

SPECIAL INSTRUCTIONS FOR CONTINUOUS LENGTH SPRINGS

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Stiffness and Initial Tension are for Music Wire. For Type 302 multiply figures shown by 5/6 (.833).

SPECIALTY STOCK PARTS: CONTINUOUS LENGTH EXTENSION SPRINGS

Music Wire (Light Oil Coated) • 302 Stainless Steel (Natural)

LEE STOCK NUMBER	OUTSIDE DIAMETER		WIRE DIAMETER		FREE LENGTH		INITIAL TENSION		APPROX. NUMBER OF COILS/IN.	STIFFNESS K	PRICE GROUP	
	IN.	MM	IN.	MM	IN.	MM	LB.	KG			Music Wire	#302 Stainless
											M	S
LEC034E 12	0.500	12.70	0.034	0.86	12	305	0.30	0.136	29.4	20	AP	AS
LEC034E 24					24	610					AS	AW
LEC034E 36					36	914					AU	AZA
LEC037E 12	0.500	12.70	0.037	0.94	12	305	0.40	0.181	27.0	28	AP	AS
LEC037E 24					24	610					AS	AW
LEC037E 36					36	914					AU	AZA
LEC045E 12	0.500	12.70	0.045	1.14	12	305	0.70	0.317	22.2	65	AP	AS
LEC045E 24					24	610					AS	AW
LEC045E 36					36	914					AU	AZA
LEC049E 12	0.500	12.70	0.049	1.24	12	305	0.88	0.398	20.4	94	AP	AS
LEC049E 24					24	610					AS	AW
LEC049E 36					36	914					AU	AZA
LEC055E 12	0.500	12.70	0.055	1.40	12	305	1.30	0.588	18.1	156	AP	AS
LEC055E 24					24	610					AT	AX
LEC055E 36					36	914					AW	AZB
LEC063E 12	0.500	12.70	0.063	1.60	12	305	2.00	0.905	16.0	273	AR	AS
LEC063E 24					24	610					AT	AX
LEC063E 36					36	914					AW	AZB
LEC067E 12	0.500	12.70	0.067	1.70	12	305	3.50	1.584	14.9	372	AR	AS
LEC067E 24					24	610					AT	AY
LEC067E 36					36	914					AW	AZC
LEC049G 12	0.750	19.05	0.049	1.24	12	305	0.59	0.267	20.4	25	AW	AY
LEC049G 24					24	610					AZ	AZC
LEC049G 36					36	914					AZB	AZG
LEC055G 12	0.750	19.05	0.055	1.40	12	305	0.80	0.362	18.1	41	AW	AY
LEC055G 24					24	610					AZ	AZC
LEC055G 36					36	914					AZB	AZG
LEC063G 12	0.750	19.05	0.063	1.60	12	305	1.20	0.543	16.0	70	AW	AY
LEC063G 24					24	610					AZ	AZD
LEC063G 36					36	914					AZB	AZH
LEC069G 12	0.750	19.05	0.069	1.75	12	305	1.60	0.724	14.5	108	AX	AZA
LEC069G 24					24	610					AZ	AZD
LEC069G 36					36	914					AZB	AZJ
LEC093G 12	0.750	19.05	0.093	2.36	12	305	3.50	1.584	10.7	396	AY	AZA
LEC093G 24					24	610					AZA	AZF
LEC093G 36					36	914					AZE	AZK
LEC105G 12	0.750	19.05	0.105	2.67	12	305	6.00	2.716	9.5	651	AY	AZB
LEC105G 24					24	610					AZB	AZG
LEC105G 36					36	914					AZE	AZL
LEC112G 12	0.750	19.05	0.112	2.84	12	305	8.00	3.621	8.9	871	AY	AZB
LEC112G 24					24	610					AZB	AZG
LEC112G 36					36	914					AZF	AZL
LEC085JK 12	1.125	28.58	0.085	2.16	12	305	1.89	0.855	11.7	70	AZ	AZD
LEC085JK 24					24	610					AZD	AZJ
LEC085JK 36					36	914					AZG	AZO
LEC125JK 12	1.125	28.58	0.125	3.18	12	305	5.51	2.494	8.0	351	AZC	AZG
LEC125JK 24					24	610					AZH	AZM
LEC125JK 36					36	914					AZL	AZO



CONTINUOUS LENGTH
EXTENSION SPRINGS

SPECIAL INSTRUCTIONS FOR CONTINUOUS LENGTH SPRINGS

STOCK NUMBERS: Add "M" to end of Stock Number for Music Wire; "S" for Type 302 Stainless.

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs. visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Stiffness and Initial Tension are for Music Wire. For Type 302 multiply figures shown by 5/6 (.833).

SPECIALTY STOCK PARTS: SPRING KITS

Compression, Extension, Instrument, HEFTY™



COMPRESSION SPRING KITS

252 Springs - 126 Different Sizes

KIT #200 Music Wire\$123

KIT #201 Stainless Steel 302*\$170

	MATERIAL	FINISH	WIRE RANGE INCHES	FREE LENGTH INCHES	OUTSIDE DIAMETER INCHES	LOAD CAPACITY POUNDS
Kit #200	Music Wire	Zinc Plated	.016 – .072	.250 – 2.000	.125 – .750	1.50 – 30
Kit #201	Stainless Steel 302	Passivated	.016 – .072	.250 – 2.000	.125 – .750	1.25 – 25



EXTENSION SPRING KITS

186 Springs - 93 Different Sizes

KIT #300 Music Wire\$208

KIT #301 Stainless Steel 302*\$247

	MATERIAL	FINISH	WIRE RANGE INCHES	FREE LENGTH INCHES	OUTSIDE DIAMETER INCHES	LOAD CAPACITY POUNDS
Kit #300	Music Wire	Zinc Plated	.007 – .075	.250 – 5.000	.062 – .750	.32 – 20.0
Kit #301	Stainless Steel 302	Passivated	.007 – .075	.250 – 5.000	.062 – .750	.25 – 17.2



INSTRUMENT SPRING KIT

216 Springs - 108 Different Sizes

KIT #100 Music Wire\$93

	MATERIAL	FINISH	WIRE RANGE INCHES	FREE LENGTH INCHES	OUTSIDE DIAMETER INCHES	LOAD CAPACITY POUNDS
Kit #100	Music Wire	Zinc Plated	.006 – .026	.125 – 1.250	.057 – .360	.30 – 6.75

*Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

You Asked and We Listened...

**MIL-SPEC Springs available from Stock at
www.leespring.com/milspec.asp**

When you need MIL-SPEC Springs, Lee simplifies your purchasing process by offering the full range of MIL-SPEC Compression Springs and Extension Springs.

- Simplified pricing – no complicated price grids.
- Paperwork included – no additional charges for material certifications or traceability.
- Easy on-line ordering – purchase up to 1000 springs on our secure website.
- Free ground shipping – on orders from 10 to 1000 pieces.
- DFARS Compliance – all Stainless Steel Mil-Spec springs meet DFARS specifications.
- Quick RFQ turnaround – over 1000, we'll respond rapidly!

For information, pricing and ordering, go to www.leespring.com/milspec.asp or call 888.SPRINGS.



About MIL- SPEC Springs

These products are part of the United States Defense Standard. They are used to help achieve standardization objectives set by the U.S. Department of Defense. They are known interchangeably as "military standards", "MIL-SPEC", "MIL-STD", or "MilSpecs." These high precision designs meet stringent technical requirements and are used in a multitude of Military and Aerospace applications, both defense and non-defense related. MIL-SPEC springs are increasingly specified by other non-Defense government organizations, technical organizations, and highly regulated industries. The MIL-SPEC standard for compression springs for loads below 20 lbs. is AS24585; this standard was formerly MS24585. The MIL-SPEC standard for extension springs for loads below 30 lbs. is AS24586; this was formerly MS24586.

Part Numbers

Be sure to specify the complete numbers as designated by AS24585 and AS24586. MIL-SPEC Springs begin with the prefix MS24585 or MS24586 followed by a hyphen and the part number, e.g., MS24585-1002 or MS24586-C13. The following chart is a helpful reference:

MIL-SPEC	Unplated	Cadmium Plated	Zinc Plated	Stainless Steel
Compression MS24585	MS24585-1 through MS24585-527	MS24585-1001 through MS24585-1527	MS24585-2010 through MS24585-2507	MS24585-C1 through MS24585-C527
Extension MS24586	MS24586-1 through MS24586-354	MS24586-521 through MS24586-854	MS24586-1006 through MS24586-1354	MS24586-C1 through MS24586-C354

Materials

All MIL-SPEC springs are available in the four authorized AS24585 and AS24586 materials:

- Uncoated Music Wire per ASTM A228.
- Cadmium Plated Music Wire in accordance with SAE-AMS-QQ-P-416, Type II, Class 2.
- Zinc Plated Music Wire in accordance with ASTM B633, Type II, Fe/Zn5.
- Corrosion Resistant Stainless Steel 302 per ASTM A313 with passivation treatment in accordance with ASTM A967. DFARS Compliant material only.

About DFARS Compliance

DFARS regulates the supply country for certain materials. It applies to Stainless Steel but does not apply to Music Wire. For a complete explanation of DFARS Compliance, go to the Regulatory Compliance and Certification Page 247.

MUSIC WIRE			STAINLESS STEEL	OD	W	FREE LENGTH	ACTIVE COILS	DEFLECTION PER COIL	LOAD	DEFLECTION	SOLID HEIGHT	RATE	PRICE GROUP			
UNPLATED (U)	CAD. PLATE (C)	ZINC PLATE (Z)	PASSIVATED (S)	IN	IN	IN		IN	LB	LB	IN	LB/IN	U	C	Z	S
MS24585-1	MS24585-1001		MS24585-C1			.250	4.500			.095	.104	19.30	AN	AO		AO
MS24585-2	MS24585-1002		MS24585-C2			.310	6.250			.131	.132	14.00	AN	AO		AO
MS24585-3	MS24585-1003		MS24585-C3			.380	7.750			.163	.156	11.30	AN	AO		AO
MS24585-4	MS24585-1004		MS24585-C4			.440	9.250			.194	.180	9.50	AN	AO		AO
MS24585-5	MS24585-1005		MS24585-C5	.120	.016	.500	10.500	.0210	1.837	.220	.200	8.30	AN	AO		AO
MS24585-6	MS24585-1006		MS24585-C6			.560	12.000			.252	.224	7.30	AN	AO		AO
MS24585-7	MS24585-1007		MS24585-C7			.620	13.250			.278	.244	6.60	AN	AO		AO
MS24585-8	MS24585-1008		MS24585-C8			.690	15.000			.315	.272	5.80	AN	AO		AO
MS24585-9	MS24585-1009		MS24585-C9			.750	16.500			.346	.296	5.30	AN	AO		AO
MS24585-10	MS24585-1010	MS24585-2010	MS24585-C10			.250	5.250			.091	.130	28.20	AN	AO	AN	AO
MS24585-11	MS24585-1011	MS24585-2011	MS24585-C11			.310	6.750			.117	.157	21.90	AN	AO	AN	AO
MS24585-12	MS24585-1012	MS24585-2012	MS24585-C12			.380	8.250			.143	.184	17.90	AN	AO	AN	AO
MS24585-13	MS24585-1013	MS24585-2013	MS24585-C13			.440	9.750			.169	.211	15.20	AN	AO	AN	AO
MS24585-14	MS24585-1014	MS24585-2014	MS24585-C14	.120	.018	.500	11.250	.0173	2.564	.195	.238	13.10	AN	AO	AN	AO
MS24585-15	MS24585-1015	MS24585-2015	MS24585-C15			.560	13.000			.224	.270	11.40	AN	AO	AN	AO
MS24585-16	MS24585-1016	MS24585-2016	MS24585-C16			.620	14.000			.242	.288	10.60	AN	AO	AN	AO
MS24585-17	MS24585-1017	MS24585-2017	MS24585-C17			.690	16.000			.276	.324	9.30	AN	AO	AN	AO
MS24585-18	MS24585-1018	MS24585-2018	MS24585-C18			.750	17.500			.302	.351	8.50	AN	AO	AN	AO
MS24585-19	MS24585-1019		MS24585-C19			.250	5.250			.063	.159	71.10	AN	AO		AO
MS24585-20	MS24585-1020		MS24585-C20			.310	7.000			.084	.198	53.30	AN	AO		AO
MS24585-21	MS24585-1021		MS24585-C21			.380	9.000			.108	.242	41.50	AN	AO		AO
MS24585-22	MS24585-1022		MS24585-C22			.440	10.250			.123	.269	36.40	AN	AO		AO
MS24585-23	MS24585-1023		MS24585-C23	.120	.022	.500	12.000	.0120	4.481	.144	.308	31.10	AN	AO		AO
MS24585-24	MS24585-1024		MS24585-C24			.560	13.250			.159	.335	28.20	AN	AO		AO
MS24585-25	MS24585-1025		MS24585-C25			.620	15.000			.180	.374	24.90	AN	AO		AO
MS24585-26	MS24585-1026		MS24585-C26			.690	17.000			.204	.418	22.00	AN	AO		AO
MS24585-27	MS24585-1027		MS24585-C27			.750	18.500			.222	.451	20.20	AN	AO		AO
MS24585-28	MS24585-1028		MS24585-C28			.810	20.000			.240	.484	18.70	AN	AO		AO
MS24585-29	MS24585-1029	MS24585-2029	MS24585-C29			.250	2.500			.141	.072	8.90	AN	AO	AN	AO
MS24585-30	MS24585-1030	MS24585-2030	MS24585-C30			.310	3.000			.167	.080	7.50	AN	AO	AN	AO
MS24585-31	MS24585-1031	MS24585-2031	MS24585-C31			.380	3.750			.212	.092	5.90	AN	AO	AN	AO
MS24585-32	MS24585-1032	MS24585-2032	MS24585-C32	.180	.016	.440	4.500	.0563	1.254	.253	.104	4.90	AN	AO	AN	AO
MS24585-33	MS24585-1033	MS24585-2033	MS24585-C33			.500	5.250			.295	.116	4.20	AN	AO	AN	AO
MS24585-34	MS24585-1034	MS24585-2034	MS24585-C34			.560	6.000			.337	.128	3.70	AN	AO	AN	AO
MS24585-35	MS24585-1035	MS24585-2035	MS24585-C35			.620	6.500			.366	.136	3.40	AN	AO	AN	AO
MS24585-36	MS24585-1036	MS24585-2036	MS24585-C36			.690	7.250			.407	.148	3.10	AN	AO	AN	AO
MS24585-37	MS24585-1037	MS24585-2037	MS24585-C37			.750	8.000			.450	.160	2.80	AN	AO	AN	AO
MS24585-38	MS24585-1038		MS24585-C38			.250	2.750			.130	.085	13.50	AN	AO		AO
MS24585-39	MS24585-1039		MS24585-C39			.310	3.250			.154	.094	11.40	AN	AO		AO
MS24585-40	MS24585-1040		MS24585-C40			.380	4.000			.190	.108	9.30	AN	AO		AO
MS24585-41	MS24585-1041		MS24585-C41	.180	.018	.440	4.750	.0475		.225	.121	7.80	AN	AO		AO
MS24585-42	MS24585-1042		MS24585-C42			.500	5.500			.261	.135	6.70	AN	AO		AO
MS24585-43	MS24585-1043		MS24585-C43			.560	6.500			.308	.153	5.70	AN	AO		AO
MS24585-44	MS24585-1044		MS24585-C44			.620	7.250			.344	.166	5.10	AN	AO		AO
MS24585-45	MS24585-1045		MS24585-C45			.690	8.000			.380	.180	4.60	AN	AO		AO
MS24585-46	MS24585-1046		MS24585-C46			.750	9.000			.427	.198	4.10	AN	AO		AO
MS24585-47	MS24585-1047	MS24585-2047	MS24585-C47			.250	3.000			.106	.110	29.60	AN	AO	AN	AO
MS24585-48	MS24585-1048	MS24585-2048	MS24585-C48			.310	3.750			.132	.126	23.70	AN	AO	AN	AO
MS24585-49	MS24585-1049	MS24585-2049	MS24585-C49			.380	4.500			.158	.143	19.80	AN	AO	AN	AO
MS24585-50	MS24585-1050	MS24585-2050	MS24585-C50			.440	5.250			.185	.159	16.90	AN	AO	AN	AO
MS24585-51	MS24585-1051	MS24585-2051	MS24585-C51	.180	.022	.500	6.250	.0352	3.134	.220	.181	14.20	AN	AO	AN	AO
MS24585-52	MS24585-1052	MS24585-2052	MS24585-C52			.560	7.500			.264	.209	11.90	AN	AO	AN	AO
MS24585-53	MS24585-1053	MS24585-2053	MS24585-C53			.620	8.500			.299	.231	10.50	AN	AO	AN	AO
MS24585-54	MS24585-1054	MS24585-2054	MS24585-C54			.690	9.250			.325	.247	9.60	AN	AO	AN	AO
MS24585-55	MS24585-1055	MS24585-2055	MS24585-C55			.750	10.250			.361	.269	8.70	AN	AO	AN	AO
MS24585-56	MS24585-1056	MS24585-2056	MS24585-C56			.810	11.500			.405	.297	7.70	AN	AO	AN	AO

SPECIAL INSTRUCTIONS FOR MS24585 COMPRESSION SPRINGS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs, visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate and Load at Solid Ht. are for Music Wire. For Stainless Steel, multiply figures shown by 5/6 (.833).
COMPLIANCE: All MS24585 Stainless Steel parts are DFARS Compliant; CAD Plated MS24585 parts are NOT RoHS compliant.

MUSIC WIRE			STAINLESS STEEL	OD	W	FREE LENGTH	ACTIVE COILS	DEFLECTION PER COIL	LOAD	DEFLECTION	SOLID HEIGHT	RATE	PRICE GROUP			
UNPLATED (U)	CAD. PLATE (C)	ZINC PLATE (Z)	PASSIVATED (S)	IN	IN	IN		IN	LB	LB	IN	LB/IN	U	C	Z	S
MS24585-57	MS24585-1057		MS24585-C57			.250	3.250			.087	.136	57.80	AN	AO		AO
MS24585-58	MS24585-1058		MS24585-C58			.310	4.000			.107	.156	47.00	AN	AO		AO
MS24585-59	MS24585-1059		MS24585-C59			.380	5.000			.134	.182	37.50	AN	AO		AO
MS24585-60	MS24585-1060		MS24585-C60			.440	6.000			.161	.208	31.20	AN	AO		AO
MS24585-61	MS24585-1061		MS24585-C61			.500	7.000			.188	.234	26.80	AN	AO		AO
MS24585-62	MS24585-1062		MS24585-C62	.180	.026	.560	8.000	.0268	5.032	.214	.260	23.50	AN	AO		AO
MS24585-63	MS24585-1063		MS24585-C63			.620	9.000			.241	.286	20.90	AN	AO		AO
MS24585-64	MS24585-1064		MS24585-C64			.690	10.000			.268	.312	18.80	AN	AO		AO
MS24585-65	MS24585-1065		MS24585-C65			.750	11.000			.295	.338	17.00	AN	AO		AO
MS24585-66	MS24585-1066		MS24585-C66			.810	12.000			.322	.364	15.60	AN	AO		AO
MS24585-67	MS24585-1067		MS24585-C67			.880	13.000			.348	.390	14.40	AN	AO		AO
MS24585-68	MS24585-1068	MS24585-2068	MS24585-C68			.310	4.000			.072	.192	122.70	AN	AO	AN	AO
MS24585-69	MS24585-1069	MS24585-2069	MS24585-C69			.380	5.000			.091	.224	97.00	AN	AO	AN	AO
MS24585-70	MS24585-1070	MS24585-2070	MS24585-C70			.440	6.250			.114	.264	77.30	AN	AO	AN	AO
MS24585-71	MS24585-1071	MS24585-2071	MS24585-C71			.500	7.500			.136	.304	64.90	AN	AO	AN	AO
MS24585-72	MS24585-1072	MS24585-2072	MS24585-C72			.560	8.250			.150	.328	58.90	AN	AO	AN	AO
MS24585-73	MS24585-1073	MS24585-2073	MS24585-C73	.180	.032	.620	9.500	.0182	8.833	.172	.368	51.30	AN	AO	AN	AO
MS24585-74	MS24585-1074	MS24585-2074	MS24585-C74			.690	10.250			.186	.392	47.50	AN	AO	AN	AO
MS24585-75	MS24585-1075	MS24585-2075	MS24585-C75			.750	11.750			.214	.440	41.30	AN	AO	AN	AO
MS24585-76	MS24585-1076	MS24585-2076	MS24585-C76			.810	13.000			.237	.480	37.30	AN	AO	AN	AO
MS24585-77	MS24585-1077	MS24585-2077	MS24585-C77			.880	14.500			.264	.528	33.50	AN	AO	AN	AO
MS24585-78	MS24585-1078	MS24585-2078	MS24585-C78			.940	15.500			.282	.560	31.30	AN	AO	AN	AO
MS24585-79	MS24585-1079	MS24585-2079	MS24585-C79			1.000	16.500			.300	.592	29.40	AN	AO	AN	AO
MS24585-80	MS24585-1080		MS24585-C80			.380	2.750			.194	.104	12.30	AN	AO		AO
MS24585-81	MS24585-1081		MS24585-C81			.440	3.500			.247	.121	9.70	AN	AO		AO
MS24585-82	MS24585-1082		MS24585-C82			.500	4.000			.282	.132	8.50	AN	AO		AO
MS24585-83	MS24585-1083		MS24585-C83	.240	.022	.560	4.500	.0706	2.394	.318	.143	7.50	AN	AO		AO
MS24585-84	MS24585-1084		MS24585-C84			.620	5.000			.353	.154	6.80	AN	AO		AO
MS24585-85	MS24585-1085		MS24585-C85			.690	5.500			.388	.165	6.20	AN	AO		AO
MS24585-86	MS24585-1086		MS24585-C86			.750	6.000			.423	.176	5.60	AN	AO		AO
MS24585-87	MS24585-1087		MS24585-C87			.810	6.500			.458	.187	5.20	AN	AO		AO
MS24585-88	MS24585-1088	MS24585-2088	MS24585-C88			.380	3.000			.165	.130	23.30	AN	AO	AN	AO
MS24585-89	MS24585-1089	MS24585-2089	MS24585-C89			.440	3.500			.193	.143	19.90	AN	AO	AN	AO
MS24585-90	MS24585-1090	MS24585-2090	MS24585-C90			.500	4.000			.221	.156	17.40	AN	AO	AN	AO
MS24585-91	MS24585-1091	MS24585-2091	MS24585-C91			.560	4.750			.262	.175	14.70	AN	AO	AN	AO
MS24585-92	MS24585-1092	MS24585-2092	MS24585-C92	.240	.026	.620	5.500	.0552	3.846	.303	.195	12.70	AN	AO	AN	AO
MS24585-93	MS24585-1093	MS24585-2093	MS24585-C93			.690	6.250			.345	.214	11.10	AN	AO	AN	AO
MS24585-94	MS24585-1094	MS24585-2094	MS24585-C94			.750	7.000			.386	.234	10.00	AN	AO	AN	AO
MS24585-95	MS24585-1095	MS24585-2095	MS24585-C95			.810	7.500			.414	.247	9.30	AO	AP	AO	AP
MS24585-96	MS24585-1096	MS24585-2096	MS24585-C96			.880	8.250			.455	.266	8.40	AO	AP	AO	AP
MS24585-97	MS24585-1097		MS24585-C97			.310	2.750			.108	.152	63.80	AN	AO		AO
MS24585-98	MS24585-1098		MS24585-C98			.380	3.250			.128	.168	53.80	AN	AO		AO
MS24585-99	MS24585-1099		MS24585-C99			.440	4.000			.158	.192	43.20	AN	AO		AO
MS24585-100	MS24585-1100		MS24585-C100			.500	4.750			.187	.216	36.80	AN	AO		AO
MS24585-101	MS24585-1101		MS24585-C101			.560	5.500			.216	.240	31.90	AN	AO		AO
MS24585-102	MS24585-1102		MS24585-C102	.240	.032	.620	6.250	.0394	6.892	.246	.264	28.00	AN	AO		AO
MS24585-103	MS24585-1103		MS24585-C103			.690	7.000			.276	.288	25.00	AN	AO		AO
MS24585-104	MS24585-1104		MS24585-C104			.750	8.000			.315	.320	21.90	AN	AO		AO
MS24585-105	MS24585-1105		MS24585-C105			.810	8.750			.344	.344	20.00	AO	AP		AP
MS24585-106	MS24585-1106		MS24585-C106			.880	9.500			.374	.368	18.40	AO	AP		AP
MS24585-107	MS24585-1107		MS24585-C107			.940	10.250			.403	.392	17.10	AO	AP		AP
MS24585-108	MS24585-1108		MS24585-C108			1.000	11.000			.433	.416	15.90	AO	AP		AP

SPECIAL INSTRUCTIONS FOR MS24585 COMPRESSION SPRINGS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs, visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Ht. are for Music Wire. For Stainless Steel, multiply figures shown by 5/6 (.833).

COMPLIANCE: All MS24585 Stainless Steel parts are DFARS Compliant; CAD Plated MS24585 parts are NOT RoHS compliant.

MUSIC WIRE			STAINLESS STEEL	OD	W	FREE LENGTH	ACTIVE COILS	DEFLECTION PER COIL	LOAD	DEFLECTION	SOLID HEIGHT	RATE	PRICE GROUP			
UNPLATED (U)	CAD. PLATE (C)	ZINC PLATE (Z)	PASSIVATED (S)	IN	IN	IN		IN	LB	LB	IN	LB/IN	U	C	Z	S
MS24585-109	MS24585-1109	MS24585-2109	MS24585-C109	.240	.038	.310	3.000	.0291	11.060	.087	.190	127.10	AN	AO	AN	AO
MS24585-110	MS24585-1110	MS24585-2110	MS24585-C110			.380	3.750			.109	.218	101.50	AN	AO	AN	AO
MS24585-111	MS24585-1111	MS24585-2111	MS24585-C111			.440	4.500			.131	.247	84.40	AN	AO	AN	AO
MS24585-112	MS24585-1112	MS24585-2112	MS24585-C112			.500	5.250			.153	.275	72.30	AN	AO	AN	AO
MS24585-113	MS24585-1113	MS24585-2113	MS24585-C113			.560	6.000			.175	.304	63.20	AN	AO	AN	AO
MS24585-114	MS24585-1114	MS24585-2114	MS24585-C114			.620	6.750			.196	.332	56.40	AN	AO	AN	AO
MS24585-115	MS24585-1115	MS24585-2115	MS24585-C115			.690	7.500			.218	.361	50.70	AN	AO	AN	AO
MS24585-116	MS24585-1116	MS24585-2116	MS24585-C116			.750	8.250			.240	.389	46.10	AN	AO	AN	AO
MS24585-117	MS24585-1117	MS24585-2117	MS24585-C117			.810	9.000			.262	.418	42.20	AO	AP	AO	AP
MS24585-118	MS24585-1118	MS24585-2118	MS24585-C118			.880	10.000			.291	.456	38.00	AO	AP	AO	AP
MS24585-119	MS24585-1119	MS24585-2119	MS24585-C119			.940	11.000			.320	.494	34.60	AO	AP	AO	AP
MS24585-120	MS24585-1120	MS24585-2120	MS24585-C120			1.000	11.750			.342	.522	32.30	AO	AP	AO	AP
MS24585-121	MS24585-1121	MS24585-2121	MS24585-C121			1.120	13.250			.385	.579	28.70	AO	AP	AO	AP
MS24585-122	MS24585-1122	MS24585-2122	MS24585-C122			1.250	14.750			.429	.636	25.80	AO	AP	AO	AP
MS24585-123	MS24585-1123	MS24585-2123	MS24585-C123			1.380	16.250			.473	.693	23.40	AO	AP	AO	AP
MS24585-124	MS24585-1124	MS24585-2124	MS24585-C124			1.500	17.750			.516	.750	21.40	AO	AP	AO	AP
MS24585-125	MS24585-1125		MS24585-C125	.240	.042	.380	3.500	.0239	14.390	.084	.231	171.30	AN	AO		AO
MS24585-126	MS24585-1126		MS24585-C126			.440	4.500			.107	.273	134.50	AN	AO		AO
MS24585-127	MS24585-1127		MS24585-C127			.500	5.250			.125	.304	115.10	AN	AO		AO
MS24585-128	MS24585-1128		MS24585-C128			.560	6.000			.143	.336	100.60	AN	AO		AO
MS24585-129	MS24585-1129		MS24585-C129			.620	6.750			.161	.367	89.40	AN	AO		AO
MS24585-130	MS24585-1130		MS24585-C130			.690	7.500			.179	.399	80.40	AN	AO		AO
MS24585-131	MS24585-1131		MS24585-C131			.750	8.500			.203	.441	70.90	AN	AO		AO
MS24585-132	MS24585-1132		MS24585-C132			.810	9.250			.221	.472	65.10	AO	AP		AP
MS24585-133	MS24585-1133		MS24585-C133			.880	10.000			.239	.504	60.20	AO	AP		AP
MS24585-134	MS24585-1134		MS24585-C134			.940	11.000			.263	.546	54.70	AO	AP		AP
MS24585-135	MS24585-1135		MS24585-C135			1.000	11.750			.281	.577	51.20	AO	AP		AP
MS24585-136	MS24585-1136		MS24585-C136			1.120	13.250			.317	.640	45.40	AO	AP		AP
MS24585-137	MS24585-1137		MS24585-C137			1.250	14.750			.352	.703	40.90	AO	AP		AP
MS24585-138	MS24585-1138		MS24585-C138			1.380	16.500			.394	.777	36.50	AO	AP		AP
MS24585-139	MS24585-1139		MS24585-C139			1.500	18.500			.442	.861	32.50	AO	AP		AP
MS24585-140	MS24585-1140	MS24585-2140	MS24585-C140	.300	.022	.500	2.500	.1181	1.931	.295	.099	6.60	AN	AO	AN	AO
MS24585-141	MS24585-1141	MS24585-2141	MS24585-C141			.560	2.750			.325	.104	5.90	AN	AO	AN	AO
MS24585-142	MS24585-1142	MS24585-2142	MS24585-C142			.620	3.250			.383	.115	5.00	AN	AO	AN	AO
MS24585-143	MS24585-1143	MS24585-2143	MS24585-C143			.690	3.500			.413	.121	4.70	AN	AO	AN	AO
MS24585-144	MS24585-1144	MS24585-2144	MS24585-C144			.750	4.000			.472	.132	4.10	AN	AO	AN	AO
MS24585-145	MS24585-1145	MS24585-2145	MS24585-C145			.810	4.250			.501	.137	3.80	AN	AO	AN	AO
MS24585-146	MS24585-1146	MS24585-2146	MS24585-C146			.880	4.500			.531	.143	3.60	AN	AO	AN	AO
MS24585-147	MS24585-1147		MS24585-C147	.300	.026	.440	2.500	.0937	3.122	.234	.117	13.30	AN	AO		AO
MS24585-148	MS24585-1148		MS24585-C148			.500	3.000			.281	.130	11.10	AN	AO		AO
MS24585-149	MS24585-1149		MS24585-C149			.560	3.250			.304	.136	10.30	AN	AO		AO
MS24585-150	MS24585-1150		MS24585-C150			.620	3.750			.351	.149	8.90	AN	AO		AO
MS24585-151	MS24585-1151		MS24585-C151			.690	4.250			.398	.162	7.80	AN	AO		AO
MS24585-152	MS24585-1152		MS24585-C152			.750	4.500			.422	.169	7.40	AN	AO		AO
MS24585-153	MS24585-1153		MS24585-C153			.810	5.000			.468	.182	6.70	AN	AO		AO
MS24585-154	MS24585-1154		MS24585-C154			.880	5.500			.515	.195	6.10	AN	AO		AO
MS24585-155	MS24585-1155		MS24585-C155			.940	6.000			.562	.208	5.50	AN	AO		AO
MS24585-156	MS24585-1156		MS24585-C156			1.000	6.500			.609	.221	5.10	AN	AO		AO
MS24585-157	MS24585-1157	MS24585-2157	MS24585-C157	.300	.032	.440	3.000	.0684	5.593	.205	.160	27.30	AN	AO	AN	AO
MS24585-158	MS24585-1158	MS24585-2158	MS24585-C158			.500	3.500			.237	.176	23.60	AN	AO	AN	AO
MS24585-159	MS24585-1159	MS24585-2159	MS24585-C159			.560	4.000			.274	.192	20.40	AN	AO	AN	AO
MS24585-160	MS24585-1160	MS24585-2160	MS24585-C160			.620	4.500			.308	.208	18.20	AN	AO	AN	AO
MS24585-161	MS24585-1161	MS24585-2161	MS24585-C161			.690	5.000			.342	.224	16.30	AN	AO	AN	AO
MS24585-162	MS24585-1162	MS24585-2162	MS24585-C162			.750	5.500			.376	.240	14.90	AN	AO	AN	AO
MS24585-163	MS24585-1163	MS24585-2163	MS24585-C163			.810	6.000			.410	.256	13.60	AN	AO	AN	AO
MS24585-164	MS24585-1164	MS24585-2164	MS24585-C164			.880	6.500			.445	.272	12.60	AN	AO	AN	AO
MS24585-165	MS24585-1165	MS24585-2165	MS24585-C165			.940	7.250			.496	.296	11.30	AN	AO	AN	AO
MS24585-166	MS24585-1166	MS24585-2166	MS24585-C166			1.000	7.750			.530	.312	10.60	AN	AO	AN	AO

SPECIAL INSTRUCTIONS FOR MS24585 COMPRESSION SPRINGS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs, visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Ht. are for Music Wire. For Stainless Steel, multiply figures shown by 5/6 (.833).

COMPLIANCE: All MS24585 Stainless Steel parts are DFARS Compliant; CAD Plated MS24585 parts are NOT RoHS compliant.

MUSIC WIRE			STAINLESS STEEL	OD	W	FREE LENGTH	ACTIVE COILS	DEFLECTION PER COIL	LOAD	DEFLECTION	SOLID HEIGHT	RATE	PRICE GROUP			
UNPLATED (U)	CAD. PLATE (C)	ZINC PLATE (Z)	PASSIVATED (S)	IN	IN	IN		IN	LB	LB	IN	LB/IN	U	C	Z	S
MS24585-167	MS24585-1167		MS24585-C167	.300	.038	.380	2.500	.0519	9.043	.130	.171	69.60	AN	AO		AO
MS24585-168	MS24585-1168		MS24585-C168			.440	3.250			.169	.199	53.50	AN	AO		AO
MS24585-169	MS24585-1169		MS24585-C169			.500	3.750			.195	.218	46.40	AN	AO		AO
MS24585-170	MS24585-1170		MS24585-C170			.560	4.500			.233	.247	38.80	AN	AO		AO
MS24585-171	MS24585-1171		MS24585-C171			.620	5.000			.259	.266	34.90	AN	AO		AO
MS24585-172	MS24585-1172		MS24585-C172			.690	5.750			.298	.294	30.30	AN	AO		AO
MS24585-173	MS24585-1173		MS24585-C173			.750	6.250			.324	.313	27.90	AN	AO		AO
MS24585-174	MS24585-1174		MS24585-C174			.810	6.750			.350	.332	25.80	AN	AO		AO
MS24585-175	MS24585-1175		MS24585-C175			.880	7.500			.389	.361	23.20	AN	AO		AO
MS24585-176	MS24585-1176		MS24585-C176			.940	8.000			.415	.380	21.80	AN	AO		AO
MS24585-177	MS24585-1177		MS24585-C177			1.000	8.500			.441	.399	20.50	AN	AO		AO
MS24585-178	MS24585-1178		MS24585-C178			1.120	9.500			.493	.437	18.30	AN	AO		AO
MS24585-179	MS24585-1179		MS24585-C179			1.250	10.500			.545	.475	16.60	AN	AO		AO
MS24585-180	MS24585-1180		MS24585-C180			1.380	11.500			.597	.513	15.10	AN	AO		AO
MS24585-181	MS24585-1181		MS24585-C181			1.500	12.500			.648	.551	13.90	AN	AO		AO
MS24585-182	MS24585-1182	MS24585-2182	MS24585-C182	.300	.042	.380	2.500	.0436	11.810	.109	.189	108.30	AN	AO		AO
MS24585-183	MS24585-1183	MS24585-2183	MS24585-C183			.440	3.000			.130	.210	90.80	AN	AO		AO
MS24585-184	MS24585-1184	MS24585-2184	MS24585-C184			.500	3.750			.167	.241	70.70	AN	AO		AO
MS24585-185	MS24585-1185	MS24585-2185	MS24585-C185			.560	4.500			.196	.273	60.20	AN	AO		AO
MS24585-186	MS24585-1186	MS24585-2186	MS24585-C186			.620	5.250			.229	.304	51.60	AN	AO		AO
MS24585-187	MS24585-1187	MS24585-2187	MS24585-C187			.690	6.000			.262	.336	45.10	AN	AO		AO
MS24585-188	MS24585-1188	MS24585-2188	MS24585-C188			.750	6.500			.283	.357	41.70	AN	AO		AO
MS24585-189	MS24585-1189	MS24585-2189	MS24585-C189			.810	7.250			.316	.388	37.40	AN	AO		AO
MS24585-190	MS24585-1190	MS24585-2190	MS24585-C190			.880	8.000			.349	.420	33.80	AN	AO		AO
MS24585-191	MS24585-1191	MS24585-2191	MS24585-C191			.940	8.500			.370	.441	31.90	AN	AO		AO
MS24585-192	MS24585-1192	MS24585-2192	MS24585-C192			1.000	9.000			.392	.462	30.10	AN	AO		AO
MS24585-193	MS24585-1193	MS24585-2193	MS24585-C193			1.120	10.000			.436	.504	27.10	AN	AO		AO
MS24585-194	MS24585-1194	MS24585-2194	MS24585-C194			1.250	11.250			.490	.556	24.10	AN	AO		AO
MS24585-195	MS24585-1195	MS24585-2195	MS24585-C195			1.380	12.500			.545	.609	21.70	AN	AO		AO
MS24585-196	MS24585-1196	MS24585-2196	MS24585-C196			1.500	13.750			.599	.661	19.70	AN	AO		AO
MS24585-197	MS24585-1197		MS24585-C197	.300	.045	.380	2.500	.0384	14.260	.096	.202	148.50	AN	AO		AO
MS24585-198	MS24585-1198		MS24585-C198			.440	3.250			.125	.236	114.10	AN	AO		AO
MS24585-199	MS24585-1199		MS24585-C199			.500	4.000			.154	.270	92.60	AN	AO		AO
MS24585-200	MS24585-1200		MS24585-C200			.560	4.750			.182	.304	78.30	AN	AO		AO
MS24585-201	MS24585-1201		MS24585-C201			.620	5.500			.211	.337	67.60	AN	AO		AO
MS24585-202	MS24585-1202		MS24585-C202			.690	6.000			.230	.360	62.00	AN	AO		AO
MS24585-203	MS24585-1203		MS24585-C203			.750	6.750			.259	.394	55.00	AN	AO		AO
MS24585-204	MS24585-1204		MS24585-C204			.810	7.250			.278	.416	51.30	AN	AO		AO
MS24585-205	MS24585-1205		MS24585-C205			.880	8.000			.307	.450	46.40	AN	AO		AO
MS24585-206	MS24585-1206		MS24585-C206			.940	8.750			.336	.484	42.40	AN	AO		AO
MS24585-207	MS24585-1207		MS24585-C207			1.000	9.250			.355	.506	40.20	AN	AO		AO
MS24585-208	MS24585-1208		MS24585-C208			1.120	10.250			.394	.551	36.20	AN	AO		AO
MS24585-209	MS24585-1209		MS24585-C209			1.250	11.500			.441	.607	32.30	AN	AO		AO
MS24585-210	MS24585-1210		MS24585-C210			1.380	12.750			.490	.664	29.10	AN	AO		AO
MS24585-211	MS24585-1211		MS24585-C211			1.500	14.000			.538	.720	26.50	AN	AO		AO
MS24585-212	MS24585-1212	MS24585-2212	MS24585-C212	.360	.022	.500	2.000	.1782	1.622	.356	.088	4.50	AN	AO	AN	AO
MS24585-213	MS24585-1213	MS24585-2213	MS24585-C213			.620	2.250			.401	.093	4.00	AN	AO	AN	AO
MS24585-214	MS24585-1214	MS24585-2214	MS24585-C214			.690	2.500			.445	.099	3.60	AN	AO	AN	AO
MS24585-215	MS24585-1215	MS24585-2215	MS24585-C215			.750	2.750			.490	.104	3.30	AN	AO	AN	AO
MS24585-216	MS24585-1216	MS24585-2216	MS24585-C216			.810	3.000			.535	.110	3.00	AN	AO	AN	AO
MS24585-217	MS24585-1217	MS24585-2217	MS24585-C217			.880	3.250			.579	.115	2.80	AN	AO	AN	AO
MS24585-218	MS24585-1218	MS24585-2218	MS24585-C218			.940	3.500			.624	.121	2.60	AN	AO	AN	AO
MS24585-219	MS24585-1219	MS24585-2219	MS24585-C219			1.000	3.750			.668	.126	2.40	AN	AO	AN	AO

SPECIAL INSTRUCTIONS FOR MS24585 COMPRESSION SPRINGS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs, visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Ht. are for Music Wire. For Stainless Steel, multiply figures shown by 5/6 (.833).

COMPLIANCE: All MS24585 Stainless Steel parts are DFARS Compliant; CAD Plated MS24585 parts are NOT RoHS compliant.

MUSIC WIRE			STAINLESS STEEL	OD	W	FREE LENGTH	ACTIVE COILS	DEFLECTION PER COIL	LOAD	DEFLECTION	SOLID HEIGHT	RATE	PRICE GROUP			
UNPLATED (U)	CAD. PLATE (C)	ZINC PLATE (Z)	PASSIVATED (S)	IN	IN	IN		IN	LB	LB	IN	LB/IN	U	C	Z	S
MS24585-220	MS24585-1220		MS24585-C220			.500	2.000			.285	.104	9.20	AN	AO		AO
MS24585-221	MS24585-1221		MS24585-C221			.560	2.250			.321	.110	8.20	AN	AO		AO
MS24585-222	MS24585-1222		MS24585-C222			.620	2.500			.356	.117	7.40	AN	AO		AO
MS24585-223	MS24585-1223		MS24585-C223			.690	2.750			.392	.123	6.70	AN	AO		AO
MS24585-224	MS24585-1224		MS24585-C224	.360	.026	.750	3.000	.1425	2.621	.427	.130	6.10	AN	AO		AO
MS24585-225	MS24585-1225		MS24585-C225			.810	3.250			.463	.136	5.70	AN	AO		AO
MS24585-226	MS24585-1226		MS24585-C226			.880	3.750			.534	.149	4.90	AN	AO		AO
MS24585-227	MS24585-1227		MS24585-C227			.940	4.000			.570	.156	4.60	AN	AO		AO
MS24585-228	MS24585-1228		MS24585-C228			1.000	4.500			.641	.169	4.10	AN	AO		AO
MS24585-229	MS24585-1229		MS24585-C229			1.120	4.750			.677	.175	3.90	AN	AO		AO
MS24585-230	MS24585-1230	MS24585-2230	MS24585-C230			.500	2.500			.263	.144	17.90	AN	AO	AN	AO
MS24585-231	MS24585-1231	MS24585-2231	MS24585-C231			.560	2.750			.290	.152	16.30	AN	AO	AN	AO
MS24585-232	MS24585-1232	MS24585-2232	MS24585-C232			.620	3.000			.316	.160	14.90	AN	AO	AN	AO
MS24585-233	MS24585-1233	MS24585-2233	MS24585-C233			.690	3.500			.369	.176	12.80	AN	AO	AN	AO
MS24585-234	MS24585-1234	MS24585-2234	MS24585-C234			.750	3.750			.395	.184	11.90	AN	AO	AN	AO
MS24585-235	MS24585-1235	MS24585-2235	MS24585-C235	.360	.032	.810	4.000	.1054	4.718	.422	.192	11.20	AN	AO	AN	AO
MS24585-236	MS24585-1236	MS24585-2236	MS24585-C236			.880	4.500			.474	.208	9.90	AN	AO	AN	AO
MS24585-237	MS24585-1237	MS24585-2237	MS24585-C237			.940	4.750			.501	.216	9.40	AN	AO	AN	AO
MS24585-238	MS24585-1238	MS24585-2238	MS24585-C238			1.000	5.250			.553	.232	8.50	AN	AO	AN	AO
MS24585-239	MS24585-1239	MS24585-2239	MS24585-C239			1.120	6.000			.632	.256	7.50	AN	AO	AN	AO
MS24585-240	MS24585-1240	MS24585-2240	MS24585-C240			1.380	7.500			.790	.304	6.00	AN	AO	AN	AO
MS24585-241	MS24585-1241	MS24585-2241	MS24585-C241			1.500	8.250			.869	.328	5.40	AN	AO	AN	AO
MS24585-242	MS24585-1242		MS24585-C242			.440	2.500			.204	.171	37.40	AN	AO		AO
MS24585-243	MS24585-1243		MS24585-C243			.500	2.750			.224	.180	34.10	AN	AO		AO
MS24585-244	MS24585-1244		MS24585-C244			.560	3.250			.265	.199	28.80	AN	AO		AO
MS24585-245	MS24585-1245		MS24585-C245			.620	3.750			.306	.218	24.90	AN	AO		AO
MS24585-246	MS24585-1246		MS24585-C246			.690	4.250			.346	.237	22.10	AN	AO		AO
MS24585-247	MS24585-1247		MS24585-C247			.750	4.500			.367	.247	20.80	AN	AO		AO
MS24585-248	MS24585-1248		MS24585-C248	.360	.038	.810	5.000	.0815	7.631	.407	.266	18.70	AN	AO		AO
MS24585-249	MS24585-1249		MS24585-C249			.880	5.500			.448	.285	17.00	AN	AO		AO
MS24585-250	MS24585-1250		MS24585-C250			.940	6.000			.489	.304	15.60	AN	AO		AO
MS24585-251	MS24585-1251		MS24585-C251			1.000	6.250			.509	.313	15.00	AN	AO		AO
MS24585-252	MS24585-1252		MS24585-C252			1.120	7.250			.591	.351	12.90	AN	AO		AO
MS24585-253	MS24585-1253		MS24585-C253			1.250	8.000			.652	.380	11.70	AN	AO		AO
MS24585-254	MS24585-1254		MS24585-C254			1.380	9.000			.733	.418	10.40	AN	AO		AO
MS24585-255	MS24585-1255		MS24585-C255			1.500	9.750			.795	.446	9.60	AN	AO		AO
MS24585-256	MS24585-1256		MS24585-C256			.440	2.500			.172	.189	58.10	AN	AO		AO
MS24585-257	MS24585-1257		MS24585-C257			.500	3.000			.207	.210	48.30	AN	AO		AO
MS24585-258	MS24585-1258		MS24585-C258			.560	3.500			.242	.231	41.30	AN	AO		AO
MS24585-259	MS24585-1259		MS24585-C259			.620	3.750			.259	.241	38.60	AN	AO		AO
MS24585-260	MS24585-1260		MS24585-C260			.690	4.250			.294	.262	34.00	AN	AO		AO
MS24585-261	MS24585-1261		MS24585-C261	.360	.042	.750	4.750	.0691	10.000	.328	.283	30.50	AN	AO		AO
MS24585-262	MS24585-1262		MS24585-C262			.810	5.250			.363	.304	27.50	AN	AO		AO
MS24585-263	MS24585-1263		MS24585-C263			.880	5.750			.397	.325	25.20	AN	AO		AO
MS24585-264	MS24585-1264		MS24585-C264			.940	6.250			.432	.346	23.10	AN	AO		AO
MS24585-265	MS24585-1265		MS24585-C265			1.000	6.750			.466	.367	21.50	AN	AO		AO
MS24585-266	MS24585-1266		MS24585-C266			1.120	7.750			.535	.409	18.70	AN	AO		AO
MS24585-267	MS24585-1267		MS24585-C267			1.250	8.500			.587	.441	17.00	AN	AO		AO
MS24585-268	MS24585-1268		MS24585-C268			1.380	9.250			.639	.472	15.60	AN	AO		AO
MS24585-269	MS24585-1269		MS24585-C269			1.500	10.000			.691	.504	14.50	AN	AO		AO

SPECIAL INSTRUCTIONS FOR MS24585 COMPRESSION SPRINGS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs, visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate and Load at Solid Ht. are for Music Wire. For Stainless Steel, multiply figures shown by 5/6 (.833).
COMPLIANCE: All MS24585 Stainless Steel parts are DFARS Compliant; CAD Plated MS24585 parts are NOT RoHS compliant.

MUSIC WIRE			STAINLESS STEEL	OD	W	FREE LENGTH	ACTIVE COILS	DEFLECTION PER COIL	LOAD	DEFLECTION	SOLID HEIGHT	RATE	PRICE GROUP			
UNPLATED (U)	CAD. PLATE (C)	ZINC PLATE (Z)	PASSIVATED (S)	IN	IN	IN		IN	LB	LB	IN	LB/IN	U	C	Z	S
MS24585-270	MS24585-1270	MS24585-2270	MS24585-C270	.360	.045	.440	2.500	.0614	12.090	.153	.202	79.00	AN	AO	AN	AO
MS24585-271	MS24585-1271	MS24585-2271	MS24585-C271			.500	3.000			.184	.225	65.70	AN	AO	AN	AO
MS24585-272	MS24585-1272	MS24585-2272	MS24585-C272			.560	3.500			.215	.247	56.20	AN	AO	AN	AO
MS24585-273	MS24585-1273	MS24585-2273	MS24585-C273			.620	4.000			.246	.270	49.10	AN	AO	AN	AO
MS24585-274	MS24585-1274	MS24585-2274	MS24585-C274			.690	4.500			.276	.292	43.80	AN	AO	AN	AO
MS24585-275	MS24585-1275	MS24585-2275	MS24585-C275			.750	5.000			.307	.315	39.40	AN	AO	AN	AO
MS24585-276	MS24585-1276	MS24585-2276	MS24585-C276			.810	5.500			.338	.337	35.80	AN	AO	AN	AO
MS24585-277	MS24585-1277	MS24585-2277	MS24585-C277			.880	6.000			.368	.360	32.80	AN	AO	AN	AO
MS24585-278	MS24585-1278	MS24585-2278	MS24585-C278			.940	6.500			.399	.382	30.30	AN	AO	AN	AO
MS24585-279	MS24585-1279	MS24585-2279	MS24585-C279			1.000	7.000			.430	.405	28.10	AN	AO	AN	AO
MS24585-280	MS24585-1280	MS24585-2280	MS24585-C280			1.120	8.000			.491	.450	24.60	AN	AO	AN	AO
MS24585-281	MS24585-1281	MS24585-2281	MS24585-C281			1.250	9.000			.552	.495	21.90	AN	AO	AN	AO
MS24585-282	MS24585-1282	MS24585-2282	MS24585-C282			1.380	10.000			.614	.540	19.70	AN	AO	AN	AO
MS24585-283	MS24585-1283	MS24585-2283	MS24585-C283			1.500	11.000			.675	.585	17.90	AN	AO	AN	AO
MS24585-284	MS24585-1284	MS24585-2284	MS24585-C284	.450	.038	.620	2.500	.1378	6.167	.344	.171	17.90	AN	AO	AN	AO
MS24585-285	MS24585-1285	MS24585-2285	MS24585-C285			.690	2.750			.379	.180	16.30	AN	AO	AN	AO
MS24585-286	MS24585-1286	MS24585-2286	MS24585-C286			.750	3.000			.413	.190	14.90	AN	AO	AN	AO
MS24585-287	MS24585-1287	MS24585-2287	MS24585-C287			.810	3.250			.448	.199	13.80	AN	AO	AN	AO
MS24585-288	MS24585-1288	MS24585-2288	MS24585-C288			.880	3.500			.482	.209	12.80	AN	AO	AN	AO
MS24585-289	MS24585-1289	MS24585-2289	MS24585-C289			.940	3.750			.517	.218	11.90	AN	AO	AN	AO
MS24585-290	MS24585-1290	MS24585-2290	MS24585-C290			1.000	4.000			.551	.228	11.20	AN	AO	AN	AO
MS24585-291	MS24585-1291	MS24585-2291	MS24585-C291			1.120	4.750			.654	.256	9.40	AN	AO	AN	AO
MS24585-292	MS24585-1292	MS24585-2292	MS24585-C292			1.250	5.250			.723	.275	8.50	AN	AO	AN	AO
MS24585-293	MS24585-1293	MS24585-2293	MS24585-C293			1.380	5.750			.792	.294	7.80	AN	AO	AN	AO
MS24585-294	MS24585-1294	MS24585-2294	MS24585-C294			1.500	6.500			.896	.323	6.90	AN	AO	AN	AO
MS24585-295	MS24585-1295		MS24585-C295	.450	.042	.620	2.500	.1183	8.136	.296	.189	27.50	AN	AO		AO
MS24585-296	MS24585-1296		MS24585-C296			.690	3.000			.354	.210	23.00	AN	AO		AO
MS24585-297	MS24585-1297		MS24585-C297			.750	3.250			.384	.220	21.20	AN	AO		AO
MS24585-298	MS24585-1298		MS24585-C298			.810	3.500			.414	.231	19.60	AN	AO		AO
MS24585-299	MS24585-1299		MS24585-C299			.880	4.000			.473	.252	17.20	AN	AO		AO
MS24585-300	MS24585-1300		MS24585-C300			.940	4.250			.503	.262	16.20	AN	AO		AO
MS24585-301	MS24585-1301		MS24585-C301			1.000	4.500			.532	.273	15.30	AN	AO		AO
MS24585-302	MS24585-1302		MS24585-C302			1.120	5.000			.591	.294	13.70	AO	AP		AP
MS24585-303	MS24585-1303		MS24585-C303			1.250	5.750			.680	.325	12.00	AO	AP		AP
MS24585-304	MS24585-1304		MS24585-C304			1.380	6.500			.769	.357	10.60	AO	AP		AP
MS24585-305	MS24585-1305		MS24585-C305			1.500	7.250			.858	.388	9.50	AO	AP		AP
MS24585-306	MS24585-1306	MS24585-2306	MS24585-C306	.450	.045	.560	2.500	.1057	9.785	.264	.202	37.10	AN	AO	AN	AO
MS24585-307	MS24585-1307	MS24585-2307	MS24585-C307			.620	2.750			.291	.214	33.60	AN	AO	AN	AO
MS24585-308	MS24585-1308	MS24585-2308	MS24585-C308			.690	3.250			.343	.236	28.50	AN	AO	AN	AO
MS24585-309	MS24585-1309	MS24585-2309	MS24585-C309			.750	3.500			.370	.247	26.40	AN	AO	AN	AO
MS24585-310	MS24585-1310	MS24585-2310	MS24585-C310			.810	3.750			.396	.259	24.70	AN	AO	AN	AO
MS24585-311	MS24585-1311	MS24585-2311	MS24585-C311			.880	4.250			.449	.281	21.70	AN	AO	AN	AO
MS24585-312	MS24585-1312	MS24585-2312	MS24585-C312			.940	4.500			.476	.292	20.50	AN	AO	AN	AO
MS24585-313	MS24585-1313	MS24585-2313	MS24585-C313			1.000	4.750			.502	.304	19.50	AN	AO	AN	AO
MS24585-314	MS24585-1314	MS24585-2314	MS24585-C314			1.120	5.500			.581	.337	16.80	AO	AP	AO	AP
MS24585-315	MS24585-1315	MS24585-2315	MS24585-C315			1.250	6.000			.634	.360	15.40	AO	AP	AO	AP
MS24585-316	MS24585-1316	MS24585-2316	MS24585-C316			1.380	6.750			.713	.394	13.70	AO	AP	AO	AP
MS24585-317	MS24585-1317	MS24585-2317	MS24585-C317			1.500	7.500			.793	.427	12.30	AO	AP	AO	AP
MS24585-318	MS24585-1318		MS24585-C318	.450	.055	.500	2.500	.0764	17.020	.191	.247	89.10	AN	AO		AO
MS24585-319	MS24585-1319		MS24585-C319			.560	2.750			.210	.261	81.00	AN	AO		AO
MS24585-320	MS24585-1320		MS24585-C320			.620	3.250			.248	.289	68.60	AN	AO		AO
MS24585-321	MS24585-1321		MS24585-C321			.690	3.750			.286	.316	59.50	AN	AO		AO
MS24585-322	MS24585-1322		MS24585-C322			.750	4.000			.306	.330	55.60	AN	AO		AO
MS24585-323	MS24585-1323		MS24585-C323			.810	4.250			.325	.344	52.40	AN	AO		AO
MS24585-324	MS24585-1324		MS24585-C324			.880	4.750			.363	.371	46.90	AN	AO		AO
MS24585-325	MS24585-1325		MS24585-C325			.940	5.250			.401	.399	42.40	AN	AO		AO
MS24585-326	MS24585-1326		MS24585-C326			1.000	5.750			.439	.426	38.80	AN	AO		AO
MS24585-327	MS24585-1327		MS24585-C327			1.120	6.500			.497	.467	34.20	AO	AP		AP
MS24585-328	MS24585-1328		MS24585-C328			1.250	7.250			.554	.509	30.70	AO	AP		AP
MS24585-329	MS24585-1329		MS24585-C329			1.380	8.000			.611	.550	27.80	AO	AP		AP
MS24585-330	MS24585-1330		MS24585-C330			1.500	8.750			.668	.591	25.50	AO	AP		AP

SPECIAL INSTRUCTIONS FOR MS24585 COMPRESSION SPRINGS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs, visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate and Load at Solid Ht. are for Music Wire. For Stainless Steel, multiply figures shown by 5/6 (.833).
COMPLIANCE: All MS24585 Stainless Steel parts are DFARS Compliant; CAD Plated MS24585 parts are NOT RoHS compliant.

SPECIALTY STOCK PARTS: MIL-SPEC

ENDS ARE GROUND • Compression Springs (MS24585)

MUSIC WIRE			STAINLESS STEEL	OD	W	FREE LENGTH	ACTIVE COILS	DEFLECTION PER COIL	LOAD	DEFLECTION	SOLID HEIGHT	RATE	PRICE GROUP			
UNPLATED (U)	CAD. PLATE (C)	ZINC PLATE (Z)	PASSIVATED (S)	IN	IN	IN		IN	LB	LB	IN	LB/IN	U	C	Z	S
MS24585-331	MS24585-1331		MS24585-C331			.620	2.000			.351	.152	15.90	AN	AO		AO
MS24585-332	MS24585-1332		MS24585-C332			.690	2.250			.395	.161	14.10	AN	AO		AO
MS24585-333	MS24585-1333		MS24585-C333			.750	2.500			.439	.171	12.70	AN	AO		AO
MS24585-334	MS24585-1334		MS24585-C334			.810	2.750			.483	.180	11.50	AN	AO		AO
MS24585-335	MS24585-1335		MS24585-C335			.880	3.000			.527	.190	10.60	AN	AO		AO
MS24585-336	MS24585-1336		MS24585-C336	.500	.038	.940	3.250	.1757	5.575	.571	.199	9.80	AN	AO		AO
MS24585-337	MS24585-1337		MS24585-C337			1.000	3.500			.614	.209	9.10	AN	AO		AO
MS24585-338	MS24585-1338		MS24585-C338			1.120	3.750			.659	.218	8.50	AO	AP		AP
MS24585-339	MS24585-1339		MS24585-C339			1.250	4.250			.747	.237	7.50	AO	AP		AP
MS24585-340	MS24585-1340		MS24585-C340			1.380	4.750			.834	.256	6.70	AO	AP		AP
MS24585-341	MS24585-1341		MS24585-C341			1.500	5.250			.922	.275	6.00	AO	AP		AP
MS24585-342	MS24585-1342		MS24585-C342			.560	2.000			.302	.168	24.30	AN	AO		AO
MS24585-343	MS24585-1343		MS24585-C343			.620	2.250			.340	.178	21.60	AN	AO		AO
MS24585-344	MS24585-1344		MS24585-C344			.690	2.500			.378	.189	19.40	AN	AO		AO
MS24585-345	MS24585-1345		MS24585-C345			.750	2.750			.416	.199	17.60	AN	AO		AO
MS24585-346	MS24585-1346		MS24585-C346			.810	3.000			.454	.210	16.10	AN	AO		AO
MS24585-347	MS24585-1347		MS24585-C347	.500	.042	.880	3.250	.1513	7.336	.492	.220	14.90	AN	AO		AO
MS24585-348	MS24585-1348		MS24585-C348			.940	3.500			.529	.231	13.90	AN	AO		AO
MS24585-349	MS24585-1349		MS24585-C349			1.000	3.750			.567	.241	12.90	AN	AO		AO
MS24585-350	MS24585-1350		MS24585-C350			1.120	4.250			.643	.262	11.40	AO	AP		AP
MS24585-351	MS24585-1351		MS24585-C351			1.250	4.750			.719	.283	10.20	AO	AP		AP
MS24585-352	MS24585-1352		MS24585-C352			1.380	5.250			.794	.304	9.20	AO	AP		AP
MS24585-353	MS24585-1353		MS24585-C353			1.500	5.750			.870	.325	8.40	AO	AP		AP
MS24585-354	MS24585-1354	MS24585-2354	MS24585-C354			.560	2.000			.271	.180	32.70	AN	AO	AN	AO
MS24585-355	MS24585-1355	MS24585-2355	MS24585-C355			.620	2.250			.305	.191	29.10	AN	AO	AN	AO
MS24585-356	MS24585-1356	MS24585-2356	MS24585-C356			.690	2.500			.339	.202	26.20	AN	AO	AN	AO
MS24585-357	MS24585-1357	MS24585-2357	MS24585-C357			.750	2.750			.373	.214	23.80	AN	AO	AN	AO
MS24585-358	MS24585-1358	MS24585-2358	MS24585-C358			.810	3.000			.407	.225	21.80	AN	AO	AN	AO
MS24585-359	MS24585-1359	MS24585-2359	MS24585-C359	.500	.045	.880	3.500	.1358	8.870	.475	.247	18.70	AN	AO	AN	AO
MS24585-360	MS24585-1360	MS24585-2360	MS24585-C360			.940	3.750			.509	.259	17.40	AN	AO	AN	AO
MS24585-361	MS24585-1361	MS24585-2361	MS24585-C361			1.000	4.000			.543	.270	16.30	AN	AO	AN	AO
MS24585-362	MS24585-1362	MS24585-2362	MS24585-C362			1.120	4.500			.611	.292	14.50	AO	AP	AO	AP
MS24585-363	MS24585-1363	MS24585-2363	MS24585-C363			1.250	5.000			.679	.315	13.10	AO	AP	AO	AP
MS24585-364	MS24585-1364	MS24585-2364	MS24585-C364			1.380	5.500			.747	.337	11.90	AO	AP	AO	AP
MS24585-365	MS24585-1365	MS24585-2365	MS24585-C365			1.500	6.000			.815	.360	10.90	AO	AS	AO	AS
MS24585-366	MS24585-1366		MS24585-C366			.500	2.000			.198	.220	77.90	AN	AP		AP
MS24585-367	MS24585-1367		MS24585-C367			.560	2.250			.223	.234	69.10	AN	AP		AP
MS24585-368	MS24585-1368		MS24585-C368			.620	2.750			.272	.261	56.70	AN	AP		AP
MS24585-369	MS24585-1369		MS24585-C369			.690	3.000			.297	.275	51.90	AN	AP		AP
MS24585-370	MS24585-1370		MS24585-C370			.750	3.250			.322	.289	47.90	AN	AP		AP
MS24585-371	MS24585-1371		MS24585-C371			.810	3.750			.371	.316	41.60	AN	AP		AP
MS24585-372	MS24585-1372		MS24585-C372	.500	.055	.880	4.000	.0990	15.420	.396	.330	38.90	AN	AP		AP
MS24585-373	MS24585-1373		MS24585-C373			.940	4.500			.445	.357	34.60	AN	AP		AP
MS24585-374	MS24585-1374		MS24585-C374			1.000	4.750			.470	.371	32.80	AN	AP		AP
MS24585-375	MS24585-1375		MS24585-C375			1.120	5.250			.520	.399	29.60	AO	AP		AP
MS24585-376	MS24585-1376		MS24585-C376			1.250	6.000			.594	.440	25.90	AO	AP		AP
MS24585-377	MS24585-1377		MS24585-C377			1.380	6.500			.643	.467	24.00	AO	AP		AP
MS24585-378	MS24585-1378		MS24585-C378			1.500	7.250			.718	.509	21.50	AO	AP		AP
MS24585-379	MS24585-1379	MS24585-2379	MS24585-C379			.750	2.000			.435	.152	11.60	AN	AP	AN	AP
MS24585-380	MS24585-1380	MS24585-2380	MS24585-C380			.810	2.300			.500	.163	10.10	AN	AP	AN	AP
MS24585-381	MS24585-1381	MS24585-2381	MS24585-C381			.880	2.500			.543	.171	9.30	AN	AP	AN	AP
MS24585-382	MS24585-1382	MS24585-2382	MS24585-C382			.940	2.700			.587	.179	8.60	AN	AP	AN	AP
MS24585-383	MS24585-1383	MS24585-2383	MS24585-C383	.550	.038	1.000	2.900	.2174	5.043	.630	.186	8.00	AN	AP	AN	AP
MS24585-384	MS24585-1384	MS24585-2384	MS24585-C384			1.120	3.300			.717	.201	7.00	AO	AP	AO	AP
MS24585-385	MS24585-1385	MS24585-2385	MS24585-C385			1.250	3.600			.783	.213	6.40	AO	AP	AO	AP
MS24585-386	MS24585-1386	MS24585-2386	MS24585-C386			1.380	4.000			.870	.228	5.80	AO	AP	AO	AP
MS24585-387	MS24585-1387	MS24585-2387	MS24585-C387			1.500	4.400			.956	.243	5.30	AO	AP	AO	AP

SPECIAL INSTRUCTIONS FOR MS24585 COMPRESSION SPRINGS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs, visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate and Load at Solid Ht. are for Music Wire. For Stainless Steel, multiply figures shown by 5/6 (.833).
COMPLIANCE: All MS24585 Stainless Steel parts are DFARS Compliant; CAD Plated MS24585 parts are NOT RoHS compliant.

MUSIC WIRE			STAINLESS STEEL	OD	W	FREE LENGTH	ACTIVE COILS	DEFLECTION PER COIL	LOAD	DEFLECTION	SOLID HEIGHT	RATE	PRICE GROUP			
UNPLATED (U)	CAD. PLATE (C)	ZINC PLATE (Z)	PASSIVATED (S)	IN	IN	IN		IN	LB	LB	IN	LB/IN	U	C	Z	S
MS24585-388	MS24585-1388	MS24585-2388	MS24585-C388	.550	.045	.620	2.000	.1694	8.091	.339	.180	23.90	AN	AP	AN	AP
MS24585-389	MS24585-1389	MS24585-2389	MS24585-C389			.690	2.250			.381	.191	21.20	AN	AP	AN	AP
MS24585-390	MS24585-1390	MS24585-2390	MS24585-C390			.750	2.500			.423	.202	19.10	AN	AP	AN	AP
MS24585-391	MS24585-1391	MS24585-2391	MS24585-C391			.810	2.700			.457	.211	17.70	AN	AP	AN	AP
MS24585-392	MS24585-1392	MS24585-2392	MS24585-C392			.880	2.950			.500	.223	16.20	AN	AP	AN	AP
MS24585-393	MS24585-1393	MS24585-2393	MS24585-C393			.940	3.200			.542	.234	14.90	AN	AP	AN	AP
MS24585-394	MS24585-1394	MS24585-2394	MS24585-C394			1.000	3.400			.576	.243	14.00	AN	AP	AN	AP
MS24585-395	MS24585-1395	MS24585-2395	MS24585-C395			1.120	3.850			.652	.263	12.40	AO	AP	AO	AP
MS24585-396	MS24585-1396	MS24585-2396	MS24585-C396			1.250	4.350			.737	.286	11.00	AO	AP	AO	AP
MS24585-397	MS24585-1397	MS24585-2397	MS24585-C397			1.380	4.800			.813	.306	9.90	AO	AP	AO	AP
MS24585-398	MS24585-1398	MS24585-2398	MS24585-C398			1.500	5.300			.898	.328	9.00	AO	AP	AO	AP
MS24585-399	MS24585-1399		MS24585-C399	.550	.055	.560	2.000	.1241	14.050	.248	.220	56.60	AN	AO		AO
MS24585-400	MS24585-1400		MS24585-C400			.620	2.250			.279	.234	50.30	AN	AO		AO
MS24585-401	MS24585-1401		MS24585-C401			.690	2.650			.329	.256	42.70	AN	AO		AO
MS24585-402	MS24585-1402		MS24585-C402			.750	2.900			.360	.269	39.00	AN	AO		AO
MS24585-403	MS24585-1403		MS24585-C403			.810	3.200			.397	.286	35.40	AN	AO		AO
MS24585-404	MS24585-1404		MS24585-C404			.880	3.500			.434	.302	32.40	AN	AO		AO
MS24585-405	MS24585-1405		MS24585-C405			.940	3.800			.471	.319	29.80	AN	AO		AO
MS24585-406	MS24585-1406		MS24585-C406			1.000	4.100			.509	.335	27.60	AN	AO		AO
MS24585-407	MS24585-1407		MS24585-C407			1.120	4.600			.571	.363	24.60	AO	AP		AP
MS24585-408	MS24585-1408		MS24585-C408			1.250	5.200			.645	.396	21.80	AO	AP		AP
MS24585-409	MS24585-1409		MS24585-C409			1.380	5.800			.720	.429	19.50	AO	AP		AP
MS24585-410	MS24585-1410		MS24585-C410			1.500	6.400			.794	.462	17.70	AO	AP		AP
MS24585-411	MS24585-1411	MS24585-2411	MS24585-C411	.550	.063	.560	2.200	.1002	20.330	.220	.265	92.40	AN	AP	AN	AP
MS24585-412	MS24585-1412	MS24585-2412	MS24585-C412			.620	2.500			.250	.283	81.30	AN	AP	AN	AP
MS24585-413	MS24585-1413	MS24585-2413	MS24585-C413			.690	2.900			.290	.309	70.10	AN	AP	AN	AP
MS24585-414	MS24585-1414	MS24585-2414	MS24585-C414			.750	3.200			.320	.328	63.50	AN	AP	AN	AP
MS24585-415	MS24585-1415	MS24585-2415	MS24585-C415			.810	3.500			.350	.346	58.10	AN	AP	AN	AP
MS24585-416	MS24585-1416	MS24585-2416	MS24585-C416			.880	3.800			.380	.365	53.50	AN	AP	AN	AP
MS24585-417	MS24585-1417	MS24585-2417	MS24585-C417			.940	4.200			.420	.391	48.40	AN	AP	AN	AP
MS24585-418	MS24585-1418	MS24585-2418	MS24585-C418			1.000	4.500			.450	.409	45.20	AO	AR	AO	AR
MS24585-419	MS24585-1419	MS24585-2419	MS24585-C419			1.120	5.100			.511	.447	39.80	AO	AR	AO	AR
MS24585-420	MS24585-1420	MS24585-2420	MS24585-C420			1.250	5.700			.571	.485	35.60	AO	AR	AO	AR
MS24585-421	MS24585-1421	MS24585-2421	MS24585-C421			1.380	6.400			.641	.529	31.70	AO	AR	AO	AR
MS24585-422	MS24585-1422	MS24585-2422	MS24585-C422			1.500	7.000			.701	.567	29.00	AO	AR	AO	AR
MS24585-423	MS24585-1423		MS24585-C423	.650	.042	.880	2.000	.2751	5.714	.550	.168	10.40	AN	AP		AP
MS24585-424	MS24585-1424		MS24585-C424			.940	2.100			.578	.172	9.90	AO	AR		AR
MS24585-425	MS24585-1425		MS24585-C425			1.000	2.300			.633	.181	9.00	AO	AR		AR
MS24585-426	MS24585-1426		MS24585-C426			1.120	2.600			.715	.193	8.00	AO	AR		AR
MS24585-427	MS24585-1427		MS24585-C427			1.250	2.900			.798	.206	7.20	AO	AR		AR
MS24585-428	MS24585-1428		MS24585-C428			1.380	3.200			.880	.218	6.50	AO	AR		AR
MS24585-429	MS24585-1429		MS24585-C429			1.500	3.500			.963	.231	5.90	AO	AR		AR
MS24585-430	MS24585-1430	MS24585-2430	MS24585-C430	.650	.045	.880	2.100	.2481	6.894	.521	.184	13.20	AN	AP	AN	AP
MS24585-431	MS24585-1431	MS24585-2431	MS24585-C431			.940	2.300			.570	.193	12.10	AO	AR	AO	AR
MS24585-432	MS24585-1432	MS24585-2432	MS24585-C432			1.000	2.500			.620	.202	11.10	AO	AR	AO	AR
MS24585-433	MS24585-1433	MS24585-2433	MS24585-C433			1.120	2.800			.695	.216	9.90	AO	AR	AO	AR
MS24585-434	MS24585-1434	MS24585-2434	MS24585-C434			1.250	3.100			.769	.229	9.00	AO	AR	AO	AR
MS24585-435	MS24585-1435	MS24585-2435	MS24585-C435			1.380	3.500			.868	.247	7.90	AO	AR	AO	AR
MS24585-436	MS24585-1436	MS24585-2436	MS24585-C436			1.500	3.800			.943	.261	7.30	AO	AR	AO	AR
MS24585-437	MS24585-1437		MS24585-C437	.650	.055	.750	2.100	.1843	12.010	.387	.225	31.00	AP	AS		AS
MS24585-438	MS24585-1438		MS24585-C438			.810	2.300			.424	.236	28.30	AP	AS		AS
MS24585-439	MS24585-1439		MS24585-C439			.880	2.600			.479	.253	25.10	AP	AS		AS
MS24585-440	MS24585-1440		MS24585-C440			.940	2.800			.516	.264	23.30	AP	AS		AS
MS24585-441	MS24585-1441		MS24585-C441			1.000	3.000			.553	.275	21.70	AP	AS		AS
MS24585-442	MS24585-1442		MS24585-C442			1.120	3.400			.627	.297	19.20	AP	AS		AS
MS24585-443	MS24585-1443		MS24585-C443			1.250	3.800			.700	.319	17.20	AP	AS		AS
MS24585-444	MS24585-1444		MS24585-C444			1.380	4.300			.792	.346	15.20	AP	AS		AS
MS24585-445	MS24585-1445		MS24585-C445			1.500	4.700			.866	.368	13.90	AP	AS		AS

SPECIAL INSTRUCTIONS FOR MS24585 COMPRESSION SPRINGS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs, visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Ht. are for Music Wire. For Stainless Steel, multiply figures shown by 5/6 (.833).

COMPLIANCE: All MS24585 Stainless Steel parts are DFARS Compliant; CAD Plated MS24585 parts are NOT RoHS compliant.

MUSIC WIRE			STAINLESS STEEL	OD	W	FREE LENGTH	ACTIVE COILS	DEFLECTION PER COIL	LOAD	DEFLECTION	SOLID HEIGHT	RATE	PRICE GROUP			
UNPLATED (U)	CAD. PLATE (C)	ZINC PLATE (Z)	PASSIVATED (S)	IN	IN	IN		IN	LB	LB	IN	LB/IN	U	C	Z	S
MS24585-446	MS24585-1446	MS24585-2446	MS24585-C446			.690	2.150			.322	.261	53.90	AP	AS	AP	AS
MS24585-447	MS24585-1447	MS24585-2447	MS24585-C447			.750	2.400			.360	.277	48.20	AP	AS	AP	AS
MS24585-448	MS24585-1448	MS24585-2448	MS24585-C448			.810	2.650			.397	.293	43.70	AP	AS	AP	AS
MS24585-449	MS24585-1449	MS24585-2449	MS24585-C449			.880	2.900			.435	.309	39.90	AP	AS	AP	AS
MS24585-450	MS24585-1450	MS24585-2450	MS24585-C450	.650	.063	.940	3.100	.1499	17.360	.465	.321	37.30	AP	AS	AP	AS
MS24585-451	MS24585-1451	MS24585-2451	MS24585-C451			1.000	3.400			.510	.340	34.00	AP	AS	AP	AS
MS24585-452	MS24585-1452	MS24585-2452	MS24585-C452			1.120	3.800			.570	.365	30.50	AR	AS	AR	AS
MS24585-453	MS24585-1453	MS24585-2453	MS24585-C453			1.250	4.300			.644	.397	27.00	AR	AS	AR	AS
MS24585-454	MS24585-1454	MS24585-2454	MS24585-C454			1.380	4.800			.719	.428	24.10	AR	AS	AR	AS
MS24585-455	MS24585-1455	MS24585-2455	MS24585-C455			1.500	5.300			.794	.460	21.90	AR	AS	AR	AS
MS24585-456	MS24585-1456		MS24585-C456			1.000	2.000			.650	.168	8.20	AO	AS		AS
MS24585-457	MS24585-1457		MS24585-C457			1.120	2.200			.714	.176	7.50	AO	AS		AS
MS24585-458	MS24585-1458		MS24585-C458	.700	.042	1.250	2.500	.3248	5.323	.812	.189	6.60	AO	AS		AS
MS24585-459	MS24585-1459		MS24585-C459			1.380	2.800			.909	.202	5.90	AO	AS		AS
MS24585-460	MS24585-1460		MS24585-C460			1.500	3.100			1.001	.214	5.30	AO	AS		AS
MS24585-461	MS24585-1461	MS24585-2461	MS24585-C461			1.000	2.100			.616	.184	10.40	AO	AS	AO	AS
MS24585-462	MS24585-1462	MS24585-2462	MS24585-C462			1.120	2.400			.704	.198	9.10	AO	AS	AO	AS
MS24585-463	MS24585-1463	MS24585-2463	MS24585-C463	.700	.045	1.250	2.700	.2932	6.420	.792	.211	8.10	AO	AS	AO	AS
MS24585-464	MS24585-1464	MS24585-2464	MS24585-C464			1.380	3.000			.880	.225	7.30	AO	AS	AO	AS
MS24585-465	MS24585-1465	MS24585-2465	MS24585-C465			1.500	3.300			.967	.236	6.60	AO	AS	AO	AS
MS24585-466	MS24585-1466		MS24585-C466			.810	2.000			.437	.220	25.60	AO	AS		AS
MS24585-467	MS24585-1467		MS24585-C467			.880	2.200			.481	.231	23.20	AO	AS		AS
MS24585-468	MS24585-1468		MS24585-C468			.940	2.400			.524	.242	21.30	AO	AS		AS
MS24585-469	MS24585-1469		MS24585-C469	.700	.055	1.000	2.600	.2185	11.180	.568	.253	19.70	AO	AS		AS
MS24585-470	MS24585-1470		MS24585-C470			1.120	3.000			.655	.275	17.10	AO	AS		AS
MS24585-471	MS24585-1471		MS24585-C471			1.250	3.300			.721	.291	15.50	AO	AS		AS
MS24585-472	MS24585-1472		MS24585-C472			1.380	3.700			.808	.313	13.80	AO	AS		AS
MS24585-473	MS24585-1473		MS24585-C473			1.500	4.100			.896	.335	12.50	AO	AS		AS
MS24585-474	MS24585-1474	MS24585-2474	MS24585-C474			.750	2.100			.374	.258	43.20	AO	AS	AO	AS
MS24585-475	MS24585-1475	MS24585-2475	MS24585-C475			.810	2.300			.410	.270	39.40	AO	AS	AO	AS
MS24585-476	MS24585-1476	MS24585-2476	MS24585-C476			.880	2.500			.446	.283	36.30	AO	AS	AO	AS
MS24585-477	MS24585-1477	MS24585-2477	MS24585-C477			.940	2.700			.481	.296	33.60	AO	AS	AO	AS
MS24585-478	MS24585-1478	MS24585-2478	MS24585-C478	.700	.063	1.000	2.900	.1783	16.170	.517	.309	31.30	AO	AS	AO	AS
MS24585-479	MS24585-1479	MS24585-2479	MS24585-C479			1.120	3.300			.588	.334	27.50	AP	AS	AP	AS
MS24585-480	MS24585-1480	MS24585-2480	MS24585-C480			1.250	3.700			.660	.359	24.50	AP	AS	AP	AS
MS24585-481	MS24585-1481	MS24585-2481	MS24585-C481			1.380	4.200			.749	.391	21.60	AP	AS	AP	AS
MS24585-482	MS24585-1482	MS24585-2482	MS24585-C482			1.500	4.600			.820	.416	19.70	AP	AS	AP	AS
MS24585-483	MS24585-1483		MS24585-C483			.690	2.000			.326	.268	59.50	AO	AS		AS
MS24585-484	MS24585-1484		MS24585-C484			.750	2.200			.359	.281	54.10	AO	AS		AS
MS24585-485	MS24585-1485		MS24585-C485			.810	2.400			.391	.295	49.60	AO	AS		AS
MS24585-486	MS24585-1486		MS24585-C486			.880	2.600			.424	.308	45.80	AO	AS		AS
MS24585-487	MS24585-1487		MS24585-C487	.700	.067	.940	2.900	.1630	19.410	.473	.328	41.00	AO	AS		AS
MS24585-488	MS24585-1488		MS24585-C488			1.000	3.100			.505	.342	38.40	AR	AS		AS
MS24585-489	MS24585-1489		MS24585-C489			1.120	3.500			.570	.368	34.10	AR	AS		AS
MS24585-490	MS24585-1490		MS24585-C490			1.250	4.000			.652	.402	29.80	AR	AS		AS
MS24585-491	MS24585-1491		MS24585-C491			1.380	4.400			.717	.429	27.10	AR	AS		AS
MS24585-492	MS24585-1492		MS24585-C492			1.500	4.900			.799	.462	24.30	AR	AS		AS
MS24585-493	MS24585-1493	MS24585-2493	MS24585-C493			.880	2.000			.512	.220	20.40	AO	AS	AO	AS
MS24585-494	MS24585-1494	MS24585-2494	MS24585-C494			.940	2.100			.537	.225	19.50	AO	AS	AO	AS
MS24585-495	MS24585-1495	MS24585-2495	MS24585-C495	.750	.055	1.000	2.300	.2559	10.470	.568	.236	17.80	AO	AS	AO	AS
MS24585-496	MS24585-1496	MS24585-2496	MS24585-C496			1.120	2.600			.665	.253	15.70	AO	AS	AO	AS
MS24585-497	MS24585-1497	MS24585-2497	MS24585-C497			1.250	2.900			.742	.269	14.10	AO	AS	AO	AS
MS24585-498	MS24585-1498	MS24585-2498	MS24585-C498			1.380	3.300			.844	.291	12.40	AO	AS	AO	AS
MS24585-499	MS24585-1499	MS24585-2499	MS24585-C499			1.500	3.600			.921	.308	11.40	AO	AS	AO	AS

SPECIAL INSTRUCTIONS FOR MS24585 COMPRESSION SPRINGS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs, visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Ht. are for Music Wire. For Stainless Steel, multiply figures shown by 5/6 (.833).

COMPLIANCE: All MS24585 Stainless Steel parts are DFARS Compliant; CAD Plated MS24585 parts are NOT RoHS compliant.

MUSIC WIRE			STAINLESS STEEL	OD	W	FREE LENGTH	ACTIVE COILS	DEFLECTION PER COIL	LOAD	DEFLECTION	SOLID HEIGHT	RATE	PRICE GROUP			
UNPLATED (U)	CAD. PLATE (C)	ZINC PLATE (Z)	PASSIVATED (S)	IN	IN	IN		IN	LB	LB	IN	LB/IN	U	C	Z	S
MS24585-500	MS24585-1500	MS24585-2500	MS24585-C500	.750	.063	.810	2.000	.2094	15.330	.419	.252	36.10	AO	AS	AO	AS
MS24585-501	MS24585-1501	MS24585-2501	MS24585-C501			.880	2.200			.461	.265	32.80	AO	AS	AO	AS
MS24585-502	MS24585-1502	MS24585-2502	MS24585-C502			.940	2.400			.502	.277	30.10	AO	AS	AO	AS
MS24585-503	MS24585-1503	MS24585-2503	MS24585-C503			1.000	2.600			.544	.290	27.80	AO	AS	AO	AS
MS24585-504	MS24585-1504	MS24585-2504	MS24585-C504			1.120	2.900			.607	.308	24.90	AP	AS	AP	AS
MS24585-505	MS24585-1505	MS24585-2505	MS24585-C505			1.250	3.300			.691	.334	21.90	AP	AS	AP	AS
MS24585-506	MS24585-1506	MS24585-2506	MS24585-C506			1.380	3.700			.774	.359	19.50	AP	AS	AP	AS
MS24585-507	MS24585-1507	MS24585-2507	MS24585-C507			1.500	4.100			.858	.384	17.60	AP	AS	AP	AS
MS24585-508	MS24585-1508		MS24585-C508	.750	.067	.750	1.900	.1915	18.170	.364	.261	49.90	AO	AS		AS
MS24585-509	MS24585-1509		MS24585-C509			.810	2.100			.402	.275	45.20	AO	AS		AS
MS24585-510	MS24585-1510		MS24585-C510			.880	2.300			.440	.288	41.30	AO	AS		AS
MS24585-511	MS24585-1511		MS24585-C511			.940	2.500			.479	.301	37.90	AO	AS		AS
MS24585-512	MS24585-1512		MS24585-C512			1.000	2.700			.517	.315	35.10	AO	AS		AS
MS24585-513	MS24585-1513		MS24585-C513			1.120	3.100			.594	.342	30.60	AP	AS		AS
MS24585-514	MS24585-1514		MS24585-C514			1.250	3.500			.670	.368	27.10	AP	AS		AS
MS24585-515	MS24585-1515		MS24585-C515			1.380	3.900			.747	.395	24.30	AP	AS		AS
MS24585-516	MS24585-1516		MS24585-C516			1.500	4.300			.823	.422	22.10	AP	AS		AS
MS24585-517	MS24585-1517		MS24585-C517	.850	.063	1.000	1.900	.2973	13.420	.564	.246	23.60	AR	AT		AT
MS24585-518	MS24585-1518		MS24585-C518			1.120	2.200			.654	.265	20.50	AR	AT		AT
MS24585-519	MS24585-1519		MS24585-C519			1.250	2.500			.743	.283	18.10	AR	AT		AT
MS24585-520	MS24585-1520		MS24585-C520			1.380	2.800			.832	.302	16.10	AR	AT		AT
MS24585-521	MS24585-1521		MS24585-C521			1.500	3.000			.892	.315	15.00	AR	AT		AT
MS24585-522	MS24585-1522		MS24585-C522	.850	.067	.940	2.000	.2561	16.100	.512	.268	31.40	AR	AT		AT
MS24585-523	MS24585-1523		MS24585-C523			1.000	2.100			.538	.275	29.90	AR	AT		AT
MS24585-524	MS24585-1524		MS24585-C524			1.120	2.400			.615	.295	26.20	AR	AT		AT
MS24585-525	MS24585-1525		MS24585-C525			1.250	2.800			.717	.322	22.30	AR	AT		AT
MS24585-526	MS24585-1526		MS24585-C526			1.380	3.100			.794	.342	20.30	AR	AT		AT
MS24585-527	MS24585-1527		MS24585-C527			1.500	3.400			.871	.362	18.50	AR	AT		AT

SPECIAL INSTRUCTIONS FOR MS24585 COMPRESSION SPRINGS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs, visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate and Load at Solid Ht. are for Music Wire. For Stainless Steel, multiply figures shown by 5/6 (.833).

COMPLIANCE: All MS24585 Stainless Steel parts are DFARS Compliant; CAD Plated MS24585 parts are NOT RoHS compliant.

SPECIALTY STOCK PARTS: MIL-SPEC

LOOPS IN-LINE POSITION • Extension Springs (MS24586)

MUSIC WIRE			STAINLESS STEEL	OD	W	FREE LENGTH	ACTIVE COILS	DEFLECTION PER COIL	MAX LOAD	INIT TENSION	MAX EXT	RATE	PRICE GROUP			
UNPLATED (U)	CAD. PLATE (C)	ZINC PLATE (Z)	PASSIVATED (S)	IN	IN	IN		IN	LB	LB	IN	LB/IN	U	C	Z	S
MS24586-1	MS24586-501		MS24586-C1	.120	.016	1.000	50.5	.0161	1.6	.2	1.81	1.74	AP	AR		AR
MS24586-2	MS24586-502		MS24586-C2			1.125	58.5				2.07	1.49	AP	AR		AR
MS24586-3	MS24586-503		MS24586-C3			1.250	66.0				2.31	1.32	AR	AS		AS
MS24586-4	MS24586-504		MS24586-C4			1.375	74.0				2.57	1.18	AR	AS		AS
MS24586-5	MS24586-505		MS24586-C5			1.500	82.0				2.82	1.06	AR	AS		AS
MS24586-6	MS24586-506	MS24586-1006	MS24586-C6	.120	.018	1.000	45.5	.0133	2.2	.2	1.60	3.33	AR	AS	AR	AS
MS24586-7	MS24586-507	MS24586-1007	MS24586-C7			1.125	52.0				1.81	2.89	AR	AS	AR	AS
MS24586-8	MS24586-508	MS24586-1008	MS24586-C8			1.250	59.0				2.03	2.55	AR	AS	AR	AS
MS24586-9	MS24586-509	MS24586-1009	MS24586-C9			1.375	66.5				2.25	2.28	AR	AS	AR	AS
MS24586-10	MS24586-510	MS24586-1010	MS24586-C10			1.500	73.0				2.47	2.06	AR	AS	AR	AS
MS24586-11	MS24586-511	MS24586-1011	MS24586-C11			1.625	80.0				2.69	1.88	AR	AS	AR	AS
MS24586-12	MS24586-512	MS24586-1012	MS24586-C12			1.750	87.0				2.90	1.72	AR	AS	AR	AS
MS24586-13	MS24586-513	MS24586-1013	MS24586-C13			1.875	94.0				3.12	1.60	AR	AS	AR	AS
MS24586-14	MS24586-514	MS24586-1014	MS24586-C14			2.000	101.0				3.34	1.49	AR	AS	AR	AS
MS24586-15	MS24586-515		MS24586-C15	.120	.020	1.000	41.0	.0111	3.0	.3	1.45	6.00	AP	AP		AR
MS24586-16	MS24586-516		MS24586-C16			1.125	47.0				1.64	4.24	AP	AP		AR
MS24586-17	MS24586-517		MS24586-C17			1.250	53.5				1.84	4.58	AP	AP		AR
MS24586-18	MS24586-518		MS24586-C18			1.375	60.0				2.04	4.06	AP	AP		AR
MS24586-19	MS24586-519		MS24586-C19			1.500	66.0				2.23	3.70	AP	AP		AR
MS24586-20	MS24586-520		MS24586-C20			1.625	72.5				2.43	3.35	AP	AP		AR
MS24586-21	MS24586-521		MS24586-C21			1.750	78.5				2.62	3.10	AR	AS		AS
MS24586-22	MS24586-522		MS24586-C22			1.875	84.5				2.81	2.89	AR	AS		AS
MS24586-23	MS24586-523		MS24586-C23			2.000	91.0				3.01	2.67	AR	AS		AS
MS24586-24	MS24586-524		MS24586-C24	.120	.022	1.000	37.5	.0090	3.9	.4	1.34	10.38	AP	AR		AR
MS24586-25	MS24586-525		MS24586-C25			1.125	43.0				1.51	9.04	AP	AR		AR
MS24586-26	MS24586-526		MS24586-C26			1.250	49.0				1.69	7.94	AR	AS		AS
MS24586-27	MS24586-527		MS24586-C27			1.375	54.5				1.86	7.20	AR	AS		AS
MS24586-28	MS24586-528		MS24586-C28			1.500	60.0				2.04	6.48	AR	AS		AS
MS24586-29	MS24586-529		MS24586-C29			1.625	66.0				2.22	5.89	AR	AS		AS
MS24586-30	MS24586-530		MS24586-C30			1.750	71.5				2.39	5.48	AR	AS		AS
MS24586-31	MS24586-531		MS24586-C31			1.875	77.0				2.57	5.05	AR	AS		AS
MS24586-32	MS24586-532		MS24586-C32			2.000	83.0				2.75	4.68	AR	AS		AS
MS24586-33	MS24586-533		MS24586-C33			2.125	88.5				2.92	4.42	AR	AS		AS
MS24586-34	MS24586-534		MS24586-C34			2.250	94.5				3.10	4.12	AR	AS		AS
MS24586-35	MS24586-535		MS24586-C35			2.375	100.0				3.28	3.89	AR	AS		AS
MS24586-36	MS24586-536		MS24586-C36			2.500	106.5				3.45	3.67	AR	AS		AS
MS24586-37	MS24586-537	MS24586-1037	MS24586-C37	.240	.026	1.000	23.0	.0424	3.3	.3	1.97	3.08	AO	AP	AO	AP
MS24586-38	MS24586-538	MS24586-1038	MS24586-C38			1.125	28.0				2.31	2.53	AO	AP	AO	AP
MS24586-39	MS24586-539	MS24586-1039	MS24586-C39			1.250	32.5				2.64	2.18	AO	AP	AO	AP
MS24586-40	MS24586-540	MS24586-1040	MS24586-C40			1.375	37.5				2.96	1.89	AO	AP	AO	AP
MS24586-41	MS24586-541	MS24586-1041	MS24586-C41			1.500	42.0				3.28	1.69	AO	AP	AO	AP
MS24586-42	MS24586-542	MS24586-1042	MS24586-C42			1.625	47.0				3.62	1.51	AO	AP	AO	AP
MS24586-43	MS24586-543	MS24586-1043	MS24586-C43			1.750	52.0				3.95	1.36	AP	AR	AP	AR
MS24586-44	MS24586-544	MS24586-1044	MS24586-C44			1.875	56.5				4.27	1.25	AP	AR	AP	AR
MS24586-45	MS24586-545	MS24586-1045	MS24586-C45			2.000	61.5				4.60	1.15	AP	AR	AP	AR
MS24586-46	MS24586-546	MS24586-1046	MS24586-C46	.240	.031	1.000	20.0	.0318	5.3	.5	1.64	7.54	AO	AP	AO	AP
MS24586-47	MS24586-547	MS24586-1047	MS24586-C47			1.125	24.0				1.89	6.52	AO	AP	AO	AP
MS24586-48	MS24586-548	MS24586-1048	MS24586-C48			1.250	28.0				2.14	5.39	AO	AP	AO	AP
MS24586-49	MS24586-549	MS24586-1049	MS24586-C49			1.375	31.0				2.36	4.87	AO	AP	AO	AP
MS24586-50	MS24586-550	MS24586-1050	MS24586-C50			1.500	36.0				2.64	4.20	AO	AP	AO	AP
MS24586-51	MS24586-551	MS24586-1051	MS24586-C51			1.625	40.0				2.89	3.77	AO	AP	AO	AP
MS24586-52	MS24586-552	MS24586-1052	MS24586-C52			1.750	44.0				3.14	3.43	AO	AP	AO	AP
MS24586-53	MS24586-553	MS24586-1053	MS24586-C53			1.875	47.0				3.37	3.21	AP	AR	AP	AR
MS24586-54	MS24586-554	MS24586-1054	MS24586-C54			2.000	52.0				3.65	2.90	AP	AR	AP	AR
MS24586-55	MS24586-555	MS24586-1055	MS24586-C55			2.125	56.0				3.91	2.70	AP	AR	AP	AR
MS24586-56	MS24586-556	MS24586-1056	MS24586-C56			2.250	60.0				4.16	2.52	AP	AR	AP	AR
MS24586-57	MS24586-557	MS24586-1057	MS24586-C57			2.375	64.0				4.41	2.36	AP	AR	AP	AR
MS24586-58	MS24586-558	MS24586-1058	MS24586-C58			2.500	68.0				4.66	2.22	AP	AR	AP	AR

SPECIAL INSTRUCTIONS FOR MS24586 EXTENSION SPRINGS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs, visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate, Maximum Load and Initial Tension are for Music Wire. For Stainless Steel, multiply figures shown by 5/6 (.833)
COMPLIANCE: All Stainless Steel MS24586 parts are DFARS Compliant; CADPlated MS24586 parts are NOT RoHS compliant.

MUSIC WIRE			STAINLESS STEEL	OD	W	FREE LENGTH	ACTIVE COILS	DEFLECTION PER COIL	MAX LOAD	INIT TENSION	MAX EXT	RATE	PRICE GROUP			
UNPLATED (U)	CAD. PLATE (C)	ZINC PLATE (Z)	PASSIVATED (S)	IN	IN	IN		IN	LB	LB	IN	LB/IN	U	C	Z	S
MS24586-59	MS24586-559		MS24586-C59	.240	.037	1.000	17.0	.0235	8.7	.8	1.40	19.80	AO	AP		AP
MS24586-60	MS24586-560		MS24586-C60			1.125	20.5				1.61	16.42	AO	AP		AP
MS24586-61	MS24586-561		MS24586-C61			1.250	24.0				1.81	14.01	AO	AP		AP
MS24586-62	MS24586-562		MS24586-C62			1.375	27.0				2.01	12.46	AO	AP		AP
MS24586-63	MS24586-563		MS24586-C63			1.500	30.5				2.20	11.20	AO	AP		AP
MS24586-64	MS24586-564		MS24586-C64			1.625	34.0				2.42	9.89	AP	AR		AR
MS24586-65	MS24586-565		MS24586-C65			1.750	37.5				2.63	8.97	AP	AR		AR
MS24586-66	MS24586-566		MS24586-C66			1.875	40.5				2.83	8.31	AP	AR		AR
MS24586-67	MS24586-567		MS24586-C67			2.000	44.0				3.04	7.64	AP	AR		AR
MS24586-68	MS24586-568		MS24586-C68			2.125	47.5				3.24	7.08	AP	AR		AR
MS24586-69	MS24586-569		MS24586-C69			2.250	51.0				3.45	6.59	AP	AR		AR
MS24586-70	MS24586-570		MS24586-C70			2.375	54.5				3.59	6.16	AP	AR		AR
MS24586-71	MS24586-571		MS24586-C71			2.500	57.5				3.85	5.85	AR	AS		AS
MS24586-72	MS24586-572		MS24586-C72			2.750	64.5				4.27	5.21	AR	AS		AS
MS24586-73	MS24586-573		MS24586-C73			3.000	71.0				4.67	4.74	AR	AS		AS
MS24586-74	MS24586-574	MS24586-1074	MS24586-C74	.240	.041	1.000	15.5	.0194	11.4	1.0	1.30	34.55	AP	AR	AP	AR
MS24586-75	MS24586-575	MS24586-1075	MS24586-C75			1.125	18.5				1.48	28.97	AP	AR	AP	AR
MS24586-76	MS24586-576	MS24586-1076	MS24586-C76			1.250	21.5				1.67	24.94	AP	AR	AP	AR
MS24586-77	MS24586-577	MS24586-1077	MS24586-C77			1.375	25.0				1.86	21.44	AP	AR	AP	AR
MS24586-78	MS24586-578	MS24586-1078	MS24586-C78			1.500	28.0				2.04	19.15	AP	AR	AP	AR
MS24586-79	MS24586-579	MS24586-1079	MS24586-C79			1.625	31.0				2.23	17.30	AP	AR	AP	AR
MS24586-80	MS24586-580	MS24586-1080	MS24586-C80			1.750	34.0				2.41	15.76	AR	AS	AR	AS
MS24586-81	MS24586-581	MS24586-1081	MS24586-C81			1.875	37.0				2.59	14.48	AR	AS	AR	AS
MS24586-82	MS24586-582	MS24586-1082	MS24586-C82			2.000	40.0				2.78	13.40	AR	AS	AR	AS
MS24586-83	MS24586-583	MS24586-1083	MS24586-C83			2.125	43.0				2.96	12.47	AR	AS	AR	AS
MS24586-84	MS24586-584	MS24586-1084	MS24586-C84			2.250	46.0				3.14	11.66	AR	AS	AR	AS
MS24586-85	MS24586-585	MS24586-1085	MS24586-C85			2.375	49.0				3.33	10.94	AR	AS	AR	AS
MS24586-86	MS24586-586	MS24586-1086	MS24586-C86			2.500	52.0				3.51	10.31	AR	AS	AR	AS
MS24586-87	MS24586-587	MS24586-1087	MS24586-C87			2.750	58.5				3.88	9.16	AR	AS	AR	AS
MS24586-88	MS24586-588	MS24586-1088	MS24586-C88			3.000	64.5				4.25	8.31	AR	AS	AR	AS
MS24586-89	MS24586-589	MS24586-1089	MS24586-C89			3.250	70.5				4.62	7.60	AR	AS	AR	AS
MS24586-90	MS24586-590	MS24586-1090	MS24586-C90			3.500	76.5				4.98	7.01	AR	AS	AR	AS
MS24586-91	MS24586-591	MS24586-1091	MS24586-C91	.360	.031	1.000	12.0	.0850	3.6	.3	2.02	3.24	AO	AP	AO	AP
MS24586-92	MS24586-592	MS24586-1092	MS24586-C92			1.125	16.0				2.48	2.43	AO	AP	AO	AP
MS24586-93	MS24586-593	MS24586-1093	MS24586-C93			1.250	20.0				2.95	1.94	AO	AP	AO	AP
MS24586-94	MS24586-594	MS24586-1094	MS24586-C94			1.375	24.0				3.41	1.62	AO	AP	AO	AP
MS24586-95	MS24586-595	MS24586-1095	MS24586-C95			1.500	28.0				3.81	1.43	AO	AP	AO	AP
MS24586-96	MS24586-596		MS24586-C96	.360	.037	1.000	10.5	.0650	5.9	.5	1.68	7.92	AO	AP		AP
MS24586-97	MS24586-597		MS24586-C97			1.125	14.0				2.04	5.93	AO	AP		AP
MS24586-98	MS24586-598		MS24586-C98			1.250	17.5				2.39	4.75	AO	AP		AP
MS24586-99	MS24586-599		MS24586-C99			1.375	20.5				2.71	4.05	AO	AP		AP
MS24586-100	MS24586-600		MS24586-C100			1.500	24.0				3.06	3.46	AO	AP		AP
MS24586-101	MS24586-601		MS24586-C101			1.625	27.5				3.41	3.02	AO	AP		AP
MS24586-102	MS24586-602		MS24586-C102			1.750	31.0				3.77	2.67	AO	AP		AP
MS24586-103	MS24586-603		MS24586-C103			1.875	34.0				4.09	2.44	AP	AR		AR
MS24586-104	MS24586-604		MS24586-C104			2.000	37.5				4.44	2.22	AP	AR		AR
MS24586-105	MS24586-605		MS24586-C105			2.125	41.0				4.79	2.03	AP	AS		AS
MS24586-106	MS24586-606		MS24586-C106			2.250	44.5				5.14	1.87	AP	AS		AS
MS24586-107	MS24586-607		MS24586-C107			2.375	47.5				5.46	1.75	AP	AS		AS
MS24586-108	MS24586-608		MS24586-C108			2.500	51.0				5.81	1.63	AP	AS		AS

SPECIAL INSTRUCTIONS FOR MS24586 EXTENSION SPRINGS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs, visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate, Maximum Load and Initial Tension are for Music Wire. For Stainless Steel, multiply figures shown by 5/6 (.833)
COMPLIANCE: All Stainless Steel MS24586 parts are DFARS Compliant; CADPlated MS24586 parts are NOT RoHS compliant.

SPECIALTY STOCK PARTS: MIL-SPEC

LOOPS IN-LINE POSITION • Extension Springs (MS24586)

MUSIC WIRE			STAINLESS STEEL	OD	W	FREE LENGTH	ACTIVE COILS	DEFLECTION PER COIL	MAX LOAD	INIT TENSION	MAX EXT	RATE	PRICE GROUP			
UNPLATED (U)	CAD. PLATE (C)	ZINC PLATE (Z)	PASSIVATED (S)	IN	IN	IN		IN	LB	LB	IN	LB/IN	U	C	Z	S
MS24586-109	MS24586-609	MS24586-1109	MS24586-C109	.360	.041	1.000	10.0	.0555	7.9	.7	1.55	12.97	AO	AP	AO	AP
MS24586-110	MS24586-610	MS24586-1110	MS24586-C110			1.125	13.0				1.85	9.99	AO	AP	AO	AP
MS24586-111	MS24586-611	MS24586-1111	MS24586-C111			1.250	16.0				2.14	8.11	AO	AP	AO	AP
MS24586-112	MS24586-612	MS24586-1112	MS24586-C112			1.375	19.0				2.43	6.83	AO	AP	AO	AP
MS24586-113	MS24586-613	MS24586-1113	MS24586-C113			1.500	22.0				2.72	5.90	AO	AP	AO	AP
MS24586-114	MS24586-614	MS24586-1114	MS24586-C114			1.625	25.0				3.01	5.19	AO	AP	AO	AP
MS24586-115	MS24586-615	MS24586-1115	MS24586-C115			1.750	28.0				3.30	4.63	AO	AP	AO	AP
MS24586-116	MS24586-616	MS24586-1116	MS24586-C116			1.875	31.0				3.60	4.19	AP	AS	AP	AS
MS24586-117	MS24586-617	MS24586-1117	MS24586-C117			2.000	34.0				3.89	3.82	AP	AS	AP	AS
MS24586-118	MS24586-618	MS24586-1118	MS24586-C118			2.125	37.0				4.18	3.51	AP	AS	AP	AS
MS24586-119	MS24586-619	MS24586-1119	MS24586-C119			2.250	40.5				4.50	3.20	AP	AS	AP	AS
MS24586-120	MS24586-620	MS24586-1120	MS24586-C120			2.375	43.5				4.79	2.98	AR	AS	AR	AS
MS24586-121	MS24586-621	MS24586-1121	MS24586-C121			2.500	46.5				5.08	2.79	AR	AS	AR	AS
MS24586-122	MS24586-622	MS24586-1122	MS24586-C122	.360	.045	1.000	9.0	.0472	10.2	.9	1.43	21.88	AO	AP	AO	AP
MS24586-123	MS24586-623	MS24586-1123	MS24586-C123			1.125	12.0				1.69	16.43	AO	AP	AO	AP
MS24586-124	MS24586-624	MS24586-1124	MS24586-C124			1.250	14.5				1.93	13.60	AO	AP	AO	AP
MS24586-125	MS24586-625	MS24586-1125	MS24586-C125			1.375	17.5				2.20	11.26	AO	AP	AO	AP
MS24586-126	MS24586-626	MS24586-1126	MS24586-C126			1.500	20.5				2.47	9.61	AO	AP	AO	AP
MS24586-127	MS24586-627	MS24586-1127	MS24586-C127			1.625	23.0				2.71	8.56	AO	AP	AO	AP
MS24586-128	MS24586-628	MS24586-1128	MS24586-C128			1.750	26.0				2.98	7.58	AO	AP	AO	AP
MS24586-129	MS24586-629	MS24586-1129	MS24586-C129			1.875	28.5				3.22	6.91	AO	AR	AO	AR
MS24586-130	MS24586-630	MS24586-1130	MS24586-C130			2.000	31.5				3.49	6.25	AO	AR	AO	AR
MS24586-131	MS24586-631	MS24586-1131	MS24586-C131			2.125	34.0				3.77	5.79	AP	AS	AP	AS
MS24586-132	MS24586-632	MS24586-1132	MS24586-C132			2.250	37.0				4.00	5.33	AP	AS	AP	AS
MS24586-133	MS24586-633	MS24586-1133	MS24586-C133			2.375	40.0				4.26	4.92	AR	AS	AR	AS
MS24586-134	MS24586-634	MS24586-1134	MS24586-C134	.360	.055	2.500	42.5	.0331	17.6	1.6	4.51	4.64	AR	AS	AR	AS
MS24586-135	MS24586-635	MS24586-1135	MS24586-C135			2.750	48.0				5.02	4.10	AR	AS	AR	AS
MS24586-136	MS24586-636	MS24586-1136	MS24586-C136			3.000	53.5				5.53	3.68	AR	AS	AR	AS
MS24586-137	MS24586-637		MS24586-C137			1.125	10.5				1.49	45.98	AP	AS		AS
MS24586-138	MS24586-638		MS24586-C138			1.250	12.5				1.66	38.65	AP	AS		AS
MS24586-139	MS24586-639		MS24586-C139			1.375	15.0				1.87	32.19	AP	AS		AS
MS24586-140	MS24586-640		MS24586-C140			1.500	17.0				2.06	28.42	AP	AS		AS
MS24586-141	MS24586-641		MS24586-C141			1.625	19.5				2.27	24.81	AP	AS		AS
MS24586-142	MS24586-642		MS24586-C142			1.750	21.5				2.46	22.47	AP	AS		AS
MS24586-143	MS24586-643		MS24586-C143			1.875	24.0				2.67	20.15	AR	AS		AS
MS24586-144	MS24586-644		MS24586-C144			2.000	26.5				2.87	18.24	AR	AS		AS
MS24586-145	MS24586-645		MS24586-C145	.360	.055	2.125	28.5	.0331	17.6	1.6	3.07	16.97	AS	AT		AT
MS24586-146	MS24586-646		MS24586-C146			2.250	31.0				3.28	15.59	AS	AT		AT
MS24586-147	MS24586-647		MS24586-C147			2.375	33.0				3.47	14.65	AS	AT		AT
MS24586-148	MS24586-648		MS24586-C148			2.500	34.5				3.68	13.62	AS	AT		AT
MS24586-149	MS24586-649		MS24586-C149			2.750	40.0				4.07	12.08	AS	AT		AT
MS24586-150	MS24586-650		MS24586-C150			3.000	44.5				4.47	10.86	AS	AU		AU
MS24586-151	MS24586-651		MS24586-C151			3.250	49.0				4.87	9.86	AS	AW		AW
MS24586-152	MS24586-652		MS24586-C152			3.500	53.5				5.27	9.03	AS	AW		AW
MS24586-153	MS24586-653		MS24586-C153			3.750	58.0				5.67	8.33	AS	AW		AW
MS24586-154	MS24586-654		MS24586-C154			4.000	62.5				6.10	7.73	AS	AW		AW
MS24586-155	MS24586-655		MS24586-C155			4.250	67.0				6.47	7.21	AT	AX		AX
MS24586-156	MS24586-656		MS24586-C156			4.500	71.5				6.81	6.76	AT	AX		AX
MS24586-157	MS24586-657	MS24586-1157	MS24586-C157	.500	.037	1.250	10.0	.1402	4.4	.4	2.65	2.85	AP	AS	AP	AS
MS24586-158	MS24586-658	MS24586-1158	MS24586-C158			1.375	13.0				3.20	2.19	AP	AS	AP	AS
MS24586-159	MS24586-659	MS24586-1159	MS24586-C159			1.500	16.5				3.81	1.73	AP	AS	AP	AS
MS24586-160	MS24586-660	MS24586-1160	MS24586-C160			1.625	20.0				4.43	1.43	AR	AS	AR	AS
MS24586-161	MS24586-661	MS24586-1161	MS24586-C161			1.750	23.0				4.98	1.24	AR	AS	AR	AS

SPECIAL INSTRUCTIONS FOR MS24586 EXTENSION SPRINGS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs, visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate, Maximum Load and Initial Tension are for Music Wire. For Stainless Steel, multiply figures shown by 5/6 (.833)
COMPLIANCE: All Stainless Steel MS24586 parts are DFARS Compliant; CADPlated MS24586 parts are NOT RoHS compliant.

MUSIC WIRE			STAINLESS STEEL	OD	W	FREE LENGTH	ACTIVE COILS	DEFLECTION PER COIL	MAX LOAD	INIT TENSION	MAX EXT	RATE	PRICE GROUP			
UNPLATED (U)	CAD. PLATE (C)	ZINC PLATE (Z)	PASSIVATED (S)	IN	IN	IN		IN	LB	LB	IN	LB/IN	U	C	Z	S
MS24586-162	MS24586-662		MS24586-C162	.500	.041	1.250	9.0	.1210	5.8	.5	2.34	4.87	AP	AS		AS
MS24586-163	MS24586-663		MS24586-C163			1.375	12.0				2.83	3.66	AP	AS		AS
MS24586-164	MS24586-664		MS24586-C164			1.500	15.0				3.32	2.92	AP	AS		AS
MS24586-165	MS24586-665		MS24586-C165			1.625	18.0				3.80	2.43	AR	AS		AS
MS24586-166	MS24586-666		MS24586-C166			1.750	21.0				4.29	2.09	AR	AS		AS
MS24586-167	MS24586-667		MS24586-C167			1.875	24.5				4.84	1.79	AR	AT		AT
MS24586-168	MS24586-668		MS24586-C168			2.000	27.5				5.33	1.59	AR	AT		AT
MS24586-169	MS24586-669		MS24586-C169			2.125	30.5				5.82	1.44	AS	AT		AT
MS24586-170	MS24586-670		MS24586-C170			2.250	33.5				6.30	1.31	AS	AT		AT
MS24586-171	MS24586-671	MS24586-1171	MS24586-C171	.500	.045	1.375	11.5	.1045	7.5	.7	2.58	5.66	AP	AS	AP	AS
MS24586-172	MS24586-672	MS24586-1172	MS24586-C172			1.500	14.0				2.94	4.65	AP	AS	AP	AS
MS24586-173	MS24586-673	MS24586-1173	MS24586-C173			1.625	17.0				3.40	3.83	AR	AS	AR	AS
MS24586-174	MS24586-674	MS24586-1174	MS24586-C174			1.750	19.5				3.79	3.34	AR	AS	AR	AS
MS24586-175	MS24586-675	MS24586-1175	MS24586-C175			1.875	22.5				4.23	2.89	AR	AT	AR	AT
MS24586-176	MS24586-676	MS24586-1176	MS24586-C176			2.000	25.0				4.61	2.60	AR	AT	AR	AT
MS24586-177	MS24586-677	MS24586-1177	MS24586-C177			2.125	28.0				5.05	2.32	AS	AT	AS	AT
MS24586-178	MS24586-678	MS24586-1178	MS24586-C178			2.250	31.0				5.49	2.10	AS	AT	AS	AT
MS24586-179	MS24586-679		MS24586-C179	.500	.055	1.375	10.0	.0761	13.1	1.2	2.14	15.64	AR	AS		AS
MS24586-180	MS24586-680		MS24586-C180			1.500	12.0				2.41	13.03	AR	AS		AS
MS24586-181	MS24586-681		MS24586-C181			1.625	14.5				2.73	10.79	AR	AS		AS
MS24586-182	MS24586-682		MS24586-C182			1.750	16.5				3.01	9.00	AR	AS		AS
MS24586-183	MS24586-683		MS24586-C183			1.875	19.0				3.92	8.23	AR	AS		AS
MS24586-184	MS24586-684		MS24586-C184			2.000	21.0				3.60	7.45	AR	AS		AS
MS24586-185	MS24586-685		MS24586-C185			2.125	23.5				3.91	6.66	AR	AT		AT
MS24586-186	MS24586-686		MS24586-C186			2.250	25.5				4.29	6.13	AR	AT		AT
MS24586-187	MS24586-687		MS24586-C187			2.375	28.0				4.51	5.58	AR	AT		AT
MS24586-188	MS24586-688		MS24586-C188			2.500	30.5				4.82	5.13	AR	AT		AT
MS24586-189	MS24586-689		MS24586-C189			2.750	35.0				5.41	4.47	AS	AW		AW
MS24586-190	MS24586-690		MS24586-C190			3.000	39.5				6.01	3.96	AT	AW		AW
MS24586-191	MS24586-691		MS24586-C191			3.250	43.0				6.52	3.64	AT	AX		AX
MS24586-192	MS24586-692		MS24586-C192			3.500	48.5				7.19	3.22	AT	AY		AY
MS24586-193	MS24586-693		MS24586-C193			3.750	54.0				7.86	2.90	AU	AY		AY
MS24586-194	MS24586-694		MS24586-C194			4.000	57.5				8.38	2.72	AU	AY		AY
MS24586-195	MS24586-695		MS24586-C195			4.250	62.0				8.97	2.52	AU	AZ		AZ
MS24586-196	MS24586-696		MS24586-C196			4.500	66.5				9.56	2.35	AU	AZ		AZ
MS24586-197	MS24586-697	MS24586-1197	MS24586-C197	.500	.063	1.375	9.0	.0608	18.8	1.7	1.92	31.26	AR	AS	AR	AS
MS24586-198	MS24586-698	MS24586-1198	MS24586-C198			1.500	11.0				2.17	25.56	AR	AS	AR	AS
MS24586-199	MS24586-699	MS24586-1199	MS24586-C199			1.625	13.0				2.42	21.63	AR	AS	AR	AS
MS24586-200	MS24586-700	MS24586-1200	MS24586-C200			1.750	15.0				2.66	18.75	AR	AS	AR	AS
MS24586-201	MS24586-701	MS24586-1201	MS24586-C201			1.875	17.0				2.91	16.54	AR	AS	AR	AS
MS24586-202	MS24586-702	MS24586-1202	MS24586-C202			2.000	19.0				3.16	14.81	AR	AS	AR	AS
MS24586-203	MS24586-703	MS24586-1203	MS24586-C203			2.125	21.0				3.40	13.39	AR	AS	AR	AS
MS24586-204	MS24586-704	MS24586-1204	MS24586-C204			2.250	23.0				3.65	12.23	AR	AU	AR	AU
MS24586-205	MS24586-705	MS24586-1205	MS24586-C205			2.375	25.0				3.90	11.25	AR	AU	AR	AU
MS24586-206	MS24586-706	MS24586-1206	MS24586-C206			2.500	27.0				4.12	10.41	AR	AU	AR	AU
MS24586-207	MS24586-707	MS24586-1207	MS24586-C207			2.750	30.5				4.60	9.22	AS	AW	AS	AW
MS24586-208	MS24586-708	MS24586-1208	MS24586-C208			3.000	34.5				5.10	8.15	AT	AW	AT	AW
MS24586-209	MS24586-709	MS24586-1209	MS24586-C209			3.250	38.5				5.59	7.30	AT	AX	AT	AX
MS24586-210	MS24586-710	MS24586-1210	MS24586-C210			3.500	42.5				6.08	6.62	AT	AX	AT	AX
MS24586-211	MS24586-711	MS24586-1211	MS24586-C211			3.750	46.5				6.58	6.05	AU	AW	AU	AW
MS24586-212	MS24586-712	MS24586-1212	MS24586-C212			4.000	50.5				7.07	5.57	AU	AW	AU	AW
MS24586-213	MS24586-713	MS24586-1213	MS24586-C213			4.250	54.5				7.56	5.16	AU	AZ	AU	AZ
MS24586-214	MS24586-714	MS24586-1214	MS24586-C214			4.500	58.5				8.06	4.81	AU	AZ	AU	AZ
MS24586-215	MS24586-715	MS24586-1215	MS24586-C215			4.750	62.5				8.55	4.50	AW	AZA	AW	AZA
MS24586-216	MS24586-716	MS24586-1216	MS24586-C216			5.000	66.5				9.04	4.23	AW	AZA	AW	AZA

SPECIAL INSTRUCTIONS FOR MS24586 EXTENSION SPRINGS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs, visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate, Maximum Load and Initial Tension are for Music Wire. For Stainless Steel, multiply figures shown by 5/6 (.833)

COMPLIANCE: All Stainless Steel MS24586 parts are DFARS Compliant; CADPlated MS24586 parts are NOT RoHS compliant.

SPECIALTY STOCK PARTS: MIL-SPEC

LOOPS IN-LINE POSITION • Extension Springs (MS24586)

MUSIC WIRE			STAINLESS STEEL	OD	W	FREE LENGTH	ACTIVE COILS	DEFLECTION PER COIL	MAX LOAD	INIT TENSION	MAX EXT	RATE	PRICE GROUP			
UNPLATED (U)	CAD. PLATE (C)	ZINC PLATE (Z)	PASSIVATED (S)	IN	IN	IN		IN	LB	LB	IN	LB/IN	U	C	Z	S
MS24586-217	MS24586-717		MS24586-C217			2.000	15.5				4.20	4.18	AR	AT		AT
MS24586-218	MS24586-718		MS24586-C218			2.125	18.0				4.68	3.60	AR	AT		AT
MS24586-219	MS24586-719		MS24586-C219			2.250	20.0				5.13	3.24	AR	AT		AT
MS24586-220	MS24586-720		MS24586-C220			2.375	22.5				5.57	2.88	AS	AW		AW
MS24586-221	MS24586-721		MS24586-C221	.650	.055	2.500	24.5	.1420	10.1	.9	6.98	2.64	AS	AW		AW
MS24586-222	MS24586-722		MS24586-C222			2.750	29.5				6.94	2.20	AS	AW		AW
MS24586-223	MS24586-723		MS24586-C223			3.000	34.0				7.83	1.90	AT	AX		AX
MS24586-224	MS24586-724		MS24586-C224			3.250	38.5				8.72	1.68	AU	AY		AY
MS24586-225	MS24586-725		MS24586-C225			3.500	43.0				9.61	1.51	AU	AY		AY
MS24586-226	MS24586-726		MS24586-C226			3.750	47.5				10.50	1.36	AU	AZ		AZ
MS24586-227	MS24586-727		MS24586-C227			4.000	52.0				11.38	1.25	AU	AZ		AZ
MS24586-228	MS24586-728	MS24586-1228	MS24586-C228			2.000	14.0				3.61	8.32	AS	AU	AS	AU
MS24586-229	MS24586-729	MS24586-1229	MS24586-C229			2.125	16.0				3.97	7.28	AS	AW	AS	AW
MS24586-230	MS24586-730	MS24586-1230	MS24586-C230			2.250	18.0				4.32	6.47	AS	AW	AS	AW
MS24586-231	MS24586-731	MS24586-1231	MS24586-C231			2.375	20.0				4.68	5.83	AS	AW	AS	AW
MS24586-232	MS24586-732	MS24586-1232	MS24586-C232			2.500	22.0				5.06	5.30	AS	AW	AS	AW
MS24586-233	MS24586-733	MS24586-1233	MS24586-C233	.650	.063	2.750	26.0	.1150	14.8	1.4	5.74	4.48	AS	AX	AS	AX
MS24586-234	MS24586-734	MS24586-1234	MS24586-C234			3.000	30.0				6.45	3.88	AT	AY	AT	AY
MS24586-235	MS24586-735	MS24586-1235	MS24586-C235			3.250	34.0				7.16	3.43	AU	AZ	AU	AZ
MS24586-236	MS24586-736	MS24586-1236	MS24586-C236			3.500	38.0				7.87	3.07	AU	AZ	AU	AZ
MS24586-237	MS24586-737	MS24586-1237	MS24586-C237			3.750	42.0				8.58	2.77	AU	AZA	AU	AZA
MS24586-238	MS24586-738	MS24586-1238	MS24586-C238			4.000	46.0				9.29	2.53	AU	AZA	AU	AZA
MS24586-239	MS24586-739	MS24586-1239	MS24586-C239			4.250	50.0				10.00	2.33	AW	AZA	AW	AZA
MS24586-240	MS24586-740	MS24586-1240	MS24586-C240			4.500	54.0				10.71	2.16	AW	AZA	AW	AZA
MS24586-241	MS24586-741		MS24586-C241			2.000	12.0				4.36	3.38	AS	AW		AS
MS24586-242	MS24586-742		MS24586-C242			2.125	14.5				4.98	2.80	AT	AX		AT
MS24586-243	MS24586-743		MS24586-C243			2.250	16.5				5.00	2.46	AT	AX		AT
MS24586-244	MS24586-744		MS24586-C244			2.375	19.0				6.19	2.14	AT	AY		AY
MS24586-245	MS24586-745		MS24586-C245	.750	.055	2.500	21.0	.1970	8.8	.8	6.64	1.93	AT	AY		AY
MS24586-246	MS24586-746		MS24586-C246			2.750	25.5				7.77	1.59	AU	AZ		AZ
MS24586-247	MS24586-747		MS24586-C247			3.000	30.0				8.91	1.35	AU	AZ		AZ
MS24586-248	MS24586-748		MS24586-C248			3.250	35.0				10.15	1.16	AW	AZA		AZA
MS24586-249	MS24586-749		MS24586-C249			3.500	39.5				11.28	1.03	AW	AZA		AZA
MS24586-250	MS24586-750	MS24586-1250	MS24586-C250			2.000	11.0				3.77	6.55	AS	AW	AS	AW
MS24586-251	MS24586-751	MS24586-1251	MS24586-C251			2.125	13.0				4.22	5.54	AS	AX	AS	AX
MS24586-252	MS24586-752	MS24586-1252	MS24586-C252			2.250	15.0				4.67	4.80	AS	AX	AS	AX
MS24586-253	MS24586-753	MS24586-1253	MS24586-C253			2.375	17.0				5.11	4.24	AS	AY	AS	AY
MS24586-254	MS24586-754	MS24586-1254	MS24586-C254			2.500	19.0				5.56	3.79	AS	AY	AS	AY
MS24586-255	MS24586-755	MS24586-1255	MS24586-C255			2.750	22.0				6.29	3.27	AT	AY	AT	AY
MS24586-256	MS24586-756	MS24586-1256	MS24586-C256			3.000	27.0				7.35	2.67	AT	AZ	AT	AZ
MS24586-257	MS24586-757	MS24586-1257	MS24586-C257	.750	.063	3.250	30.5	.1610	12.8	1.2	8.16	2.36	AU	AZA	AU	AZA
MS24586-258	MS24586-758	MS24586-1258	MS24586-C258			3.500	34.5				9.05	2.09	AU	AZA	AU	AZA
MS24586-259	MS24586-759	MS24586-1259	MS24586-C259			3.750	38.5				9.95	1.87	AW	AZA	AW	AZA
MS24586-260	MS24586-760	MS24586-1260	MS24586-C260			4.000	42.5				10.84	1.70	AW	AZB	AW	AZB
MS24586-261	MS24586-761	MS24586-1261	MS24586-C261			4.250	46.5				11.74	1.55	AX	AZC	AX	AZC
MS24586-262	MS24586-762	MS24586-1262	MS24586-C262			4.500	50.5				12.63	1.43	AX	AZD	AX	AZD
MS24586-263	MS24586-763	MS24586-1263	MS24586-C263			4.750	54.5				13.53	1.32	AY	AZE	AY	AZE
MS24586-264	MS24586-764	MS24586-1264	MS24586-C264			5.000	58.5				14.42	1.23	AY	AZE	AY	AZE

SPECIAL INSTRUCTIONS FOR MS24586 EXTENSION SPRINGS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs, visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate, Maximum Load and Initial Tension are for Music Wire. For Stainless Steel, multiply figures shown by 5/6 (.833)
COMPLIANCE: All Stainless Steel MS24586 parts are DFARS Compliant; CADPlated MS24586 parts are NOT RoHS compliant.

MUSIC WIRE			STAINLESS STEEL	OD	W	FREE LENGTH	ACTIVE COILS	DEFLECTION PER COIL	MAX LOAD	INIT TENSION	MAX EXT	RATE	PRICE GROUP			
UNPLATED (U)	CAD. PLATE (C)	ZINC PLATE (Z)	PASSIVATED (S)	IN	IN	IN		IN	LB	LB	IN	LB/IN	U	C	Z	S
MS24586-265	MS24586-765	MS24586-1265	MS24586-C265			2.000	9.5				3.16	16.25	AS	AW	AS	AW
MS24586-266	MS24586-766	MS24586-1266	MS24586-C266			2.125	11.5				3.63	13.42	AS	AW	AS	AW
MS24586-267	MS24586-767	MS24586-1267	MS24586-C267			2.250	13.0				3.83	11.88	AS	AY	AS	AY
MS24586-268	MS24586-768	MS24586-1268	MS24586-C268			2.375	14.5				4.14	10.65	AT	AY	AT	AY
MS24586-269	MS24586-769	MS24586-1269	MS24586-C269			2.500	16.5				4.51	9.35	AT	AY	AT	AY
MS24586-270	MS24586-770	MS24586-1270	MS24586-C270			2.750	19.5				5.13	7.92	AT	AZ	AT	AZ
MS24586-271	MS24586-771	MS24586-1271	MS24586-C271	.750	.075	3.000	23.0	.1218	20.7	1.9	5.00	6.71	AU	AZA	AU	AZA
MS24586-272	MS24586-772	MS24586-1272	MS24586-C272			3.250	26.5				6.48	5.82	AT	AZB	AT	AZB
MS24586-273	MS24586-773	MS24586-1273	MS24586-C273			3.500	29.5				7.09	5.23	AW	AZB	AW	AZB
MS24586-274	MS24586-774	MS24586-1274	MS24586-C274			3.750	33.0				7.77	4.68	AW	AZC	AW	AZC
MS24586-275	MS24586-775	MS24586-1275	MS24586-C275			4.000	36.5				8.45	4.23	AX	AZD	AX	AZD
MS24586-276	MS24586-776	MS24586-1276	MS24586-C276			4.250	39.5				9.06	3.91	AX	AZE	AX	AZE
MS24586-277	MS24586-777	MS24586-1277	MS24586-C277			4.500	43.0				9.74	3.59	AX	AZE	AX	AZE
MS24586-278	MS24586-778	MS24586-1278	MS24586-C278			4.750	46.5				10.41	3.32	AY	AZE	AY	AZE
MS24586-279	MS24586-779	MS24586-1279	MS24586-C279			5.000	49.5				11.03	3.12	AY	AZE	AY	AZE
MS24586-280	MS24586-780		MS24586-C280			2.000	8.5				4.22	3.20	AX	AZC		AZC
MS24586-281	MS24586-781		MS24586-C281			2.125	10.5				4.87	2.59	AX	AZC		AZC
MS24586-282	MS24586-782		MS24586-C282	.850	.055	2.250	13.0	.2613	7.8	.7	5.65	2.09	AX	AZC		AZC
MS24586-283	MS24586-783		MS24586-C283			2.375	15.0				6.29	1.81	AX	AZC		AZC
MS24586-284	MS24586-784		MS24586-C284			2.500	17.5				7.07	1.55	AX	AZC		AZC
MS24586-285	MS24586-785		MS24586-C285			2.750	22.0				8.50	1.24	AX	AZC		AZC
MS24586-286	MS24586-786		MS24586-C286			2.125	9.5				4.30	4.74	AX	AZD		AZD
MS24586-287	MS24586-787		MS24586-C287			2.250	11.5				4.88	3.92	AX	AZD		AZD
MS24586-288	MS24586-788		MS24586-C288			2.375	13.5				5.46	3.34	AX	AZD		AZD
MS24586-289	MS24586-789		MS24586-C289	.850	.063	2.500	15.5	.2286	11.3	1.0	6.04	2.91	AX	AZD		AZD
MS24586-290	MS24586-790		MS24586-C290			2.750	19.5				7.21	2.31	AX	AZD		AZD
MS24586-291	MS24586-791		MS24586-C291			3.000	23.5				8.37	1.92	AY	AZE		AZE
MS24586-292	MS24586-792		MS24586-C292			3.250	27.5				9.54	1.64	AY	AZE		AZE
MS24586-293	MS24586-793		MS24586-C293			3.500	31.5				10.70	1.43	AY	AZE		AZE
MS24586-294	MS24586-794		MS24586-C294			2.250	10.5				3.97	9.70	AY	AZE		AZE
MS24586-295	MS24586-795		MS24586-C295			2.375	12.0				5.34	8.49	AY	AZE		AZE
MS24586-296	MS24586-796		MS24586-C296			2.500	13.5				4.71	7.54	AY	AZE		AZE
MS24586-297	MS24586-797		MS24586-C297			2.750	17.0				5.54	5.99	AY	AZE		AZE
MS24586-298	MS24586-798		MS24586-C298			3.000	20.5				6.36	4.97	AY	AZE		AZE
MS24586-299	MS24586-799		MS24586-C299			3.250	23.5				7.10	4.33	AY	AZE		AZE
MS24586-300	MS24586-800		MS24586-C300	.850	.075	3.500	27.0	.1640	18.4	1.7	7.93	3.77	AY	AZE		AZE
MS24586-301	MS24586-801		MS24586-C301			3.750	30.5				8.75	3.34	AY	AZE		AZE
MS24586-302	MS24586-802		MS24586-C302			4.000	33.0				9.49	3.04	AY	AZE		AZE
MS24586-303	MS24586-803		MS24586-C303			4.250	37.0				10.32	2.75	AZ	AZF		AZF
MS24586-304	MS24586-804		MS24586-C304			4.500	40.5				11.40	2.51	AZ	AZF		AZF
MS24586-305	MS24586-805		MS24586-C305			4.750	43.5				11.88	2.34	AZ	AZF		AZF
MS24586-306	MS24586-806		MS24586-C306			5.000	47.0				12.71	2.17	AZ	AZF		AZF
MS24586-307	MS24586-807		MS24586-C307			2.250	9.5				3.52	19.15	AY	AZE		AZE
MS24586-308	MS24586-808		MS24586-C308			2.375	11.0				3.85	15.90	AY	AZE		AZE
MS24586-309	MS24586-809		MS24586-C309			2.500	12.5				4.18	13.99	AY	AZE		AZE
MS24586-310	MS24586-810		MS24586-C310			2.750	15.5				4.83	11.28	AY	AZE		AZE
MS24586-311	MS24586-811		MS24586-C311			3.000	18.5				5.49	9.45	AY	AZE		AZE
MS24586-312	MS24586-812		MS24586-C312			3.250	21.5				6.14	8.13	AZ	AZF		AZF
MS24586-313	MS24586-813		MS24586-C313	.850	.085	3.500	24.0	.1344	25.9	2.4	6.73	7.28	AZ	AZF		AZF
MS24586-314	MS24586-814		MS24586-C314			3.750	27.0				7.38	6.48	AZ	AZF		AZF
MS24586-315	MS24586-815		MS24586-C315			4.000	30.0				8.03	5.83	AZ	AZF		AZF
MS24586-316	MS24586-816		MS24586-C316			4.250	33.0				8.68	5.30	AZ	AZF		AZF
MS24586-317	MS24586-817		MS24586-C317			4.500	36.0				9.34	4.86	AZ	AZF		AZF
MS24586-318	MS24586-818		MS24586-C318			4.750	39.0				9.99	4.48	AZ	AZF		AZF
MS24586-319	MS24586-819		MS24586-C319			5.000	42.0				10.64	4.16	AZ	AZF		AZF
MS24586-320	MS24586-820	MS24586-1320	MS24586-C320			2.500	11.0				5.91	2.58	AY	AZE	AY	AZE
MS24586-321	MS24586-821	MS24586-1321	MS24586-C321	1.000	.063	2.750	15.0	.3100	9.7	.9	7.40	1.89	AY	AZE	AY	AZE
MS24586-322	MS24586-822	MS24586-1322	MS24586-C322			3.000	19.0				8.89	1.49	AY	AZE	AY	AZE
MS24586-323	MS24586-823	MS24586-1323	MS24586-C323			3.250	23.0				10.38	1.23	AY	AZE	AY	AZE

SPECIAL INSTRUCTIONS FOR MS24586 EXTENSION SPRINGS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs, visit leespring.com; 1000+ pcs. contact Lee Spring.

CALCULATIONS: Spring Rate, Maximum Load and Initial Tension are for Music Wire. For Stainless Steel, multiply figures shown by 5/6 (.833)

COMPLIANCE: All Stainless Steel MS24586 parts are DFARS Compliant; CADPlated MS24586 parts are NOT RoHS compliant.

SPECIALTY STOCK PARTS: MIL-SPEC

LOOPS IN-LINE POSITION • Extension Springs (MS24586)

MUSIC WIRE			STAINLESS STEEL	OD	W	FREE LENGTH	ACTIVE COILS	DEFLECTION PER COIL	MAX LOAD	INIT TENSION	MAX EXT	RATE	PRICE GROUP			
UNPLATED (U)	CAD. PLATE (C)	ZINC PLATE (Z)	PASSIVATED (S)	IN	IN	IN		IN	LB	LB	IN	LB/IN	U	C	Z	S
MS24586-324	MS24586-824	MS24586-1324	MS24586-C324	1.000	.075	2.500	9.5	.2387	15.7	1.4	4.77	6.31	AZ	AZE	AZ	AZE
MS24586-325	MS24586-825	MS24586-1325	MS24586-C325			2.750	13.0				5.85	4.61	AZ	AZE	AZ	AZE
MS24586-326	MS24586-826	MS24586-1326	MS24586-C326			3.000	16.5				6.94	3.63	AZ	AZE	AZ	AZE
MS24586-327	MS24586-827	MS24586-1327	MS24586-C327			3.250	19.5				7.91	3.07	AZ	AZF	AZ	AZF
MS24586-328	MS24586-828	MS24586-1328	MS24586-C328			3.500	23.0				8.99	2.60	AZ	AZF	AZ	AZF
MS24586-329	MS24586-829	MS24586-1329	MS24586-C329			3.750	26.5				10.07	2.26	AZ	AZF	AZ	AZF
MS24586-330	MS24586-830	MS24586-1330	MS24586-C330			4.000	29.5				11.04	2.03	AZ	AZF	AZ	AZF
MS24586-331	MS24586-831	MS24586-1331	MS24586-C331			4.250	33.0				12.13	1.82	AZ	AZG	AZ	AZG
MS24586-332	MS24586-832	MS24586-1332	MS24586-C332			4.500	36.5				13.21	1.64	AZ	AZG	AZ	AZG
MS24586-333	MS24586-833	MS24586-1333	MS24586-C333			4.750	39.5				14.18	1.52	AZ	AZG	AZ	AZG
MS24586-334	MS24586-834	MS24586-1334	MS24586-C334			5.000	43.0				15.26	1.39	AZ	AZG	AZ	AZG
MS24586-335	MS24586-835		MS24586-C335	1.000	.085	2.750	12.0	.1974	22.2	2.0	5.12	8.53	AZ	AZF		AZF
MS24586-336	MS24586-836		MS24586-C336			3.000	15.0				5.96	6.82	AZ	AZF		AZF
MS24586-337	MS24586-837		MS24586-C337			3.250	18.0				6.80	5.69	AZ	AZF		AZF
MS24586-338	MS24586-838		MS24586-C338			3.500	20.5				7.55	4.99	AZ	AZF		AZF
MS24586-339	MS24586-839		MS24586-C339			3.750	23.5				8.39	4.35	AZ	AZF		AZF
MS24586-340	MS24586-840		MS24586-C340			4.000	26.5				9.23	3.86	AZ	AZF		AZF
MS24586-341	MS24586-841		MS24586-C341			4.250	29.5				10.07	3.47	AZA	AZG		AZG
MS24586-342	MS24586-842		MS24586-C342			4.500	32.5				10.92	3.15	AZA	AZG		AZG
MS24586-343	MS24586-843		MS24586-C343			4.750	35.5				11.76	2.88	AZA	AZG		AZG
MS24586-344	MS24586-844		MS24586-C344			5.000	38.5				12.60	2.66	AZA	AZG		AZG
MS24586-345	MS24586-845	MS24586-1345	MS24586-C345	1.000	.095	2.750	11.0	.1657	30.0	2.7	4.57	14.98	AZ	AZF	AZ	AZF
MS24586-346	MS24586-846	MS24586-1346	MS24586-C346			3.000	13.5				5.24	12.20	AZ	AZF	AZ	AZF
MS24586-347	MS24586-847	MS24586-1347	MS24586-C347			3.250	16.0				5.90	10.30	AZ	AZF	AZ	AZF
MS24586-348	MS24586-848	MS24586-1348	MS24586-C348			3.500	19.0				6.65	8.67	AZ	AZF	AZ	AZF
MS24586-349	MS24586-849	MS24586-1349	MS24586-C349			3.750	21.5				7.31	7.66	AZ	AZF	AZ	AZF
MS24586-350	MS24586-850	MS24586-1350	MS24586-C350			4.000	24.0				7.98	6.86	AZA	AZG	AZA	AZG
MS24586-351	MS24586-851	MS24586-1351	MS24586-C351			4.250	26.5				8.64	6.22	AZA	AZG	AZA	AZG
MS24586-352	MS24586-852	MS24586-1352	MS24586-C352			4.500	29.5				9.39	5.59	AZA	AZG	AZA	AZG
MS24586-353	MS24586-853	MS24586-1353	MS24586-C353			4.750	32.0				10.50	5.15	AZA	AZG	AZA	AZG
MS24586-354	MS24586-854	MS24586-1354	MS24586-C354			5.000	34.5				10.72	4.78	AZA	AZH	AZA	AZH

SPECIAL INSTRUCTIONS FOR MS24586 EXTENSION SPRINGS

PRICING: See Inside Front Cover for 10 to 199 pricing. To price or order up to 1000 pcs, visit leespring.com; 1000+ pcs. contact Lee Spring.
CALCULATIONS: Spring Rate, Maximum Load and Initial Tension are for Music Wire. For Stainless Steel, multiply figures shown by 5/6 (.833)
COMPLIANCE: All Stainless Steel MS24586 parts are DFARS Compliant; CADPlated MS24586 parts are NOT RoHS compliant.

Custom Springs
& Formed
Wire Parts

CUSTOM

Manufactured
to Your
Specifications

Custom Springs & Formed Wire Parts




Lee Spring®

leespring.com



We turn ideas into reality.

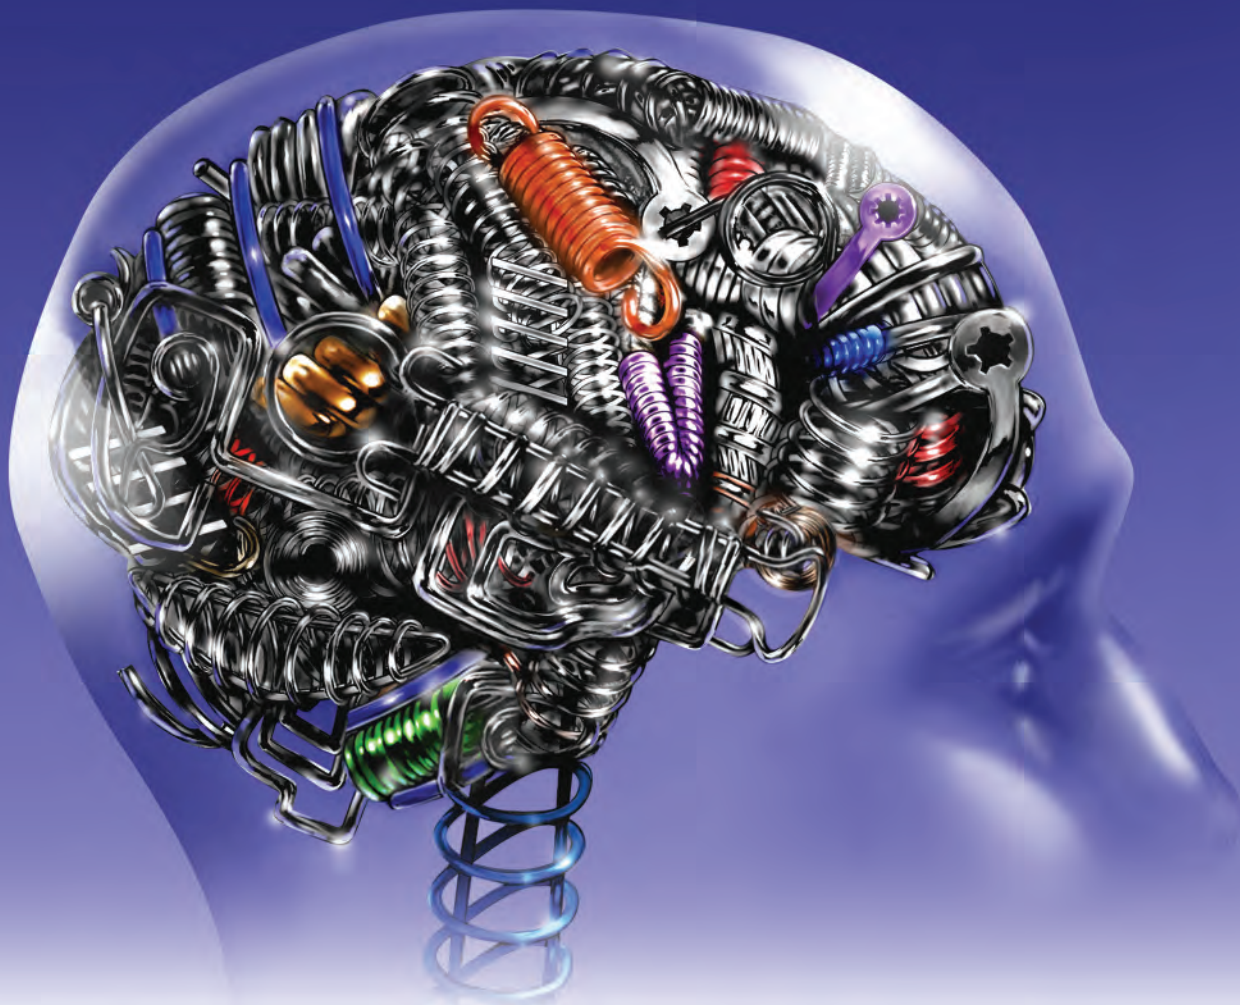

Custom springs and wire forms made to your specifications.

You *know* what you want. Now how do you make it happen? That's where we come in. Since 1918, Lee Spring has been manufacturing custom springs and wire forms for just about any application you can think of. If needed, our experienced engineers will work closely with you from inception to completion so there is nothing left to chance. The result? A world-class custom product you can count on each and every time.

- Custom Springs Made to Any Specifications
- Complete Engineering Support Available
- Formed Wire Parts, Stampings and Fourslide Parts
- 90 Years of Spring Engineering Experience
- Over 19,000 Spring Designs in Stock

For your next spring project, give us a call at 1-888-777-4647, prompt 3 for Engineering. With your ingenuity and our experience, the possibilities are endless.

 **ROHS**
COMPLIANT



 **Lee Spring®**
leespring.com

Custom Springs, Wire Forms, Stampings & Fourslide Parts

Lee Spring offers support for every stage of custom design, manufacturing and distribution:

- Application/Concurrent Engineering staff
- Regulatory expertise including RoHS, REACH and DFARS
- Proof of concept methodologies
- CAD assisted product design, drawing and modeling
- In-house prototype production services
- Factories outfitted to effectively accommodate both short and long production run
- In-house tooling production including EDM
- Extensive experience working with Aerospace/Military specifications (AS9100), Automotive Specifications (TS16949) and FDA Trial Support (21 CFR Part 820)
- Proprietary integrated quality control system
- State of the art computerized spring testing equipment
- Global supply chain network for both production and distribution
- Blanket agreement and consignment inventory management capabilities
- Pull/Kanban capabilities
- Ongoing Customer/Supplier improvement initiatives
- ISO 9001 Registered Quality Management System

From Start to Finish, Lee Spring Has the Custom Capabilities You Need!

Compression Springs:

Outside Diameter: 0.025 – 5.75"/0.64 – 146.1 mm
Wire Diameter : 0.004" – 0.625"/0.10 mm – 15.88 mm

Extension Springs:

Outside Diameter: 0.025 – 5.75"/0.64 – 146.1 mm
Wire Diameter: 0.005" – 0.625"/0.13 mm – 15.88 mm

Torsion Springs:

Outside Diameter: 0.025 – 5.75"/0.64 – 146.1 mm
Wire Diameter : 0.005" – 0.187"/0.13 mm – 4.75 mm

Wave Springs:

Outside Diameter: 0.200" – 8.000"/5.08 mm – 203.2 mm
Inside Diameter: 0.150" – 4.54"/3.81 mm – 115.32 mm

Constant Force Springs:

Min. Outside Diameter: 0.340" – 8.636 mm
Inside Diameter: 0.280" – 1.97"/7.11 mm – 50.04mm
Min Length: 11.80"/299.72 mm

Distinct Production Capabilities:

- **Plastic Compression Springs • Drawbar Springs • Cone Springs • Double Torsion Springs • Extension Springs with Swivel Hooks**
- **Wire Forms:** Wire Diameters: 0.010" – 0.24" / 0.25 mm – 6 mm • Maximum Finished Length: 60" / 1524 mm
- **Stampings:** Strip Width: up to 3" / 76.20 mm • Strip Thickness: 0.005 to 0.062" / 0.13mm – 1.57 mm
- **Fourslide Parts:** Strip Width: 0.010" – 0.500"/0.25 mm – 12.70 mm • Strip Thickness: 0.003" – 0.125" / 0.08 mm – 3.18 mm • Wire Diameter: 0.005" – 0.187"/0.13 mm – 4.75 mm

Secondary Operations and Finishing:

- Assembly • Color Coding • Electropolishing • Grinding • Heat Treating • Looping
- Passivation • Powder Coating • Shot Peening • Spring Setting • Plating: Nickel, Zinc, Cadmium
- Special Finishes (e.g., Black Oxide)

Materials:

- Beryllium Copper • Beryllium Copper, Silver Coated • Carbon Steel, Hard Drawn
- Carbon Steel, Oil Tempered • Chrome Silicon, Oil Tempered • Chrome Vanadium, Oil Tempered
- Elgiloy®* • Hastelloy®** • Inconel®† 600, 718 & x750 • Music Wire • Phosphor Bronze
- Plastic Composites • Stainless Steel, 300 Series • Stainless Steel, 17-7

Please inquire regarding other materials.

*Elgiloy is a trademark of Elgiloy Ltd. Partnership.

**Hastelloy is a registered trademark of Haynes International Inc.

† Inconel is registered trademark of Special Metals Corporation.

Active Coils — those coils which are free to deflect under load.

Allow for Set — spring is supplied longer than specified to compensate for length loss when fully compressed in assembly by customer. Usually recommended for large quantity orders to reduce cost.

Angular Relationship of Ends — the relative position of the plane of the hooks or loops of extension springs to each other.

Blue — a thin blue film of oxide on ferrous alloys, sometimes used to indicate that the material has been stress relieved.

Baking — heating of electroplated springs to relieve hydrogen embrittlement.

Buckling — bowing or lateral deflection of compression springs when compressed, related to the slenderness ratio (L/D).

Closed Ends — ends of compression springs where pitch of the end coils is reduced so that the end coils touch.

Closed and Ground Ends — same as with closed ends, except that the end is ground to provide a flat plane.

Closed Length — see Solid Height.

Close-Wound — coiled with adjacent coils in contact.

Coils Per Inch — see Pitch.

Deflection Motion — of spring ends or arms under the application or removal of an external load.

Elastic Limit — maximum stress to which a material may be subjected without producing permanent set.

Endurance Limit — maximum stress at which any given material will operate indefinitely without failure for a given minimum stress.

Free Angle — angle between the arms of a torsion spring when the spring is not loaded.

Free Length — the overall length of a spring in the unloaded position.

Frequency (natural) — the lowest inherent rate of free vibration of a spring itself (usually in cycles per second) with ends restrained.

Gradient — see Rate.

Heat Setting — fixturing a spring at elevated temperature to minimize loss of load at operating temperature.

Helix — the spiral form (open or closed) of compression, extension and torsion springs.

Hooks — open loops or ends of extension springs.

Hot Pressing — see Heat Setting.

Hydrogen Embrittlement — hydrogen absorbed in electroplating or pickling of carbon steels, tending to make the spring material brittle and susceptible to cracking and failure, particularly under sustained loads.

Hysteresis — the mechanical energy loss that always occurs under cyclic loading and unloading of a spring, proportional to the area between the loading and unloading load-deflection curves within the elastic range to a spring.

Initial Tension — the force that keeps the coils of an extension spring closed and which must be overcome before the coils start to open.

Load — the force applied to a spring that causes a deflection.

Loops — coil-like wire shapes at the ends of extension springs that provide for attachment and force application.

Mean Coil Diameter — outside spring diameter minus one wire diameter.

Modulus in Shear or Torsion — coefficient of stiffness for extension and compression springs.

Modulus in Tension or Bending — coefficient of stiffness used for torsion and flat springs (Young's Modulus).

Moment — see Torque.

Open Ends, Not Ground — end of a compression spring with a constant pitch for each coil.

Open and Ground End — "open ends, not ground" followed by an end grinding operation.

Passivating — acid treatment of stainless steel to remove contaminants and improve corrosion resistance.

Permanent Set — a material that is deflected so far that its elastic properties have been exceeded and it does not return to its original condition upon release of load is said to have taken a "permanent set".

Pitch — the distance from center to center of the wire in adjacent active coils (recommended practice is to specify number of active coils rather than pitch).

Preset — see Remove Set.

Rate — change in load per unit deflection, generally given in pounds per inch.

Remove Set — full compression of a spring to solid state by manufacturer when needed to prevent length loss in operation.

Residual Stress — stresses induced by set removal, shot peening, cold working, forming or other means. These stresses may or may not be beneficial, depending on the application.

Set — length loss in operation due to the high stress condition of the spring.

Shot Peening — a cold working process in which the material surface is peened to induce compressive stresses and thereby improve fatigue life.

Slenderness Ratio — ratio of spring length to mean coil diameter.

Solid Height — height of a compression spring when under sufficient load to bring all coils into contact with adjacent coils.

Spring Index — ratio of the mean coil diameter to wire diameter

Squared and Ground Ends — see Closed and Ground Ends.

Squared Ends — see Closed Ends.

Stress Range — the difference in operating stresses at minimum and maximum loads.

Stress Relieve — to subject springs to low-temperature heat treatment so as to relieve residual stresses.

Squareness of Ends — angular deviation between the axis of a compression spring and a normal to the plane of the ends.

Squareness Under Load — same as in Squareness of Ends, except with the spring under load.

Torque — a twisting action in torsion springs which tends to produce rotation, equal to the load multiplied by the distance (or moment arm) from the load to the axis of the spring body. Usually expressed in inch-oz., inch-pounds or in foot-pounds.

Total Number of Coils — number of active coils plus the coils forming the ends.

Trapped Stress — see Residual Stress.

ROHS COMPLIANCE

RoHS (European Directive 2002/95/EC on Restriction of the Use of Certain Hazardous Substances) is European legislation that restricts the levels of Lead, Mercury, Cadmium, Hexavalent Chromium, Polybrominated Biphenyls (PBB) and Polybrominated Diphenyl Ethers (PBDE) present in electrical and electronic equipment sold in the European Union, commencing July 1, 2006. **All Lee Spring Stock Products, with the exception of Cadmium Plated MIL-SPEC Springs, comply with the RoHS Directive.**

REACH COMPLIANCE

REACH (Regulation on Registration, Evaluation, Authorization and Restriction of Chemicals) refers to European Union Regulation No 1907/2006. The aim of REACH is to ensure a high level of protection of human health and the environment from the risks that can be posed by chemicals. **All Lee Spring Stock Products, with the exception of Cadmium Plated MIL-SPEC Springs, comply with this regulation.**

While the vast majority of Lee Spring Custom Products are also RoHS and REACH compliant, please note that certain specifications requested by our customers may not be compliant. Lee Spring only manufactures products that are not in compliance with these regulations upon customer request and can advise customers on RoHS or REACH compliance issues if there is any uncertainty.

DFARS COMPLIANCE

DFARS 252.225-7014, Alt.1 prohibits prime government contractors and all suppliers at every tier from incorporating “specialty metals” (as defined in the clause) into military parts, components and/or end item deliverables unless the specialty metals have been:

- melted in the United States
- its outlying areas, or
- a qualifying country listed in DFARS 225.872-1.

Articles manufactured in a qualifying country, regardless of where the specialty metal may have been melted, are not subject to the requirement.

Based on the definition of “specialty metals”, as given in DFARS 252.225-7014, Music Wire Hard Drawn MB, and Oil Tempered MB spring wire are excluded from this requirement. However, Stainless Steel 301, Stainless Steel 302, Stainless Steel 316, Stainless Steel 17-7, and Oil Tempered Chrome Silicon are considered “specialty metals” (are not excluded) and therefore may be restricted for use under DFARS 252.225-7014.

Not all of the wire used by Lee Spring in the manufacture of our products is melted in the United States or in any of the other qualifying countries. Should the products you need fall under the DFARS 252.225-7014 requirement, you will need to contact Lee Spring Customer Service or Engineering so that your requirement can be processed as a custom transaction. This may involve an increase in price, lead time, or both, on a case by case basis, depending on the availability of a suitable supply of the restricted alloy required.

MS (MATERIAL TRACEABILITY)

All Stock Spring products are available with Material Traceability certification; these products should be designated with the suffix MS. There is a documentation surcharge included in the price. Please contact Lee Spring for pricing.

All Custom Spring products are available with Material Traceability certification. Please be sure to specify your requirement for these documents when placing a custom order.

EXPORT REGULATIONS

All Lee Spring Stock products are exempt from and therefore compliant with the International Traffic in Arms Regulation (ITAR) (22 CFR 120-130). *Note that any customer required modifications to form, fit or function specifically for a military application would preclude such exemption.*

MIL-SPEC SPRINGS

Lee Spring now stocks the complete line of products meeting Military Standards Compression Springs (AS24585) and Extension Springs (AS24586) as detailed on page 225.



Compression springs are open-coil helical springs wound or constructed to oppose compression along the axis of wind. Helical Compression Springs are the most common spring configuration. Generally, they are either placed over a rod or fitted inside a hole. When you put a load on a compression spring, making it shorter, it pushes back against the load and tries to get back to its original length. Compression springs offer resistance to linear compressing forces (push), and are in fact one of the most efficient energy storage devices.

Compression springs can be supplied with ground ends for improved squareness and reduced solid heights.

Comprehensive Capabilities

Configurations:

- Cylindrical • Conical • Barrel • Hourglass
- Closed Ends • Open Ends • Reduced Ends
- Ground Ends • Unground Ends
- Constant Pitch • Variable Pitch

Secondaries:

- Stress Relieve • Heat Treating • Passivation
- Shot Peening Plating • Painting
- Powder Coating • Grinding




Wire sizes from .004" through .625"

Materials:

- Carbon Steels • Alloy Steels
- Stainless Steel 17-7, 301, 302* and 316
- Phosphor Bronze
- Hastelloy • Inconel 600, 718 and x750
- Beryllium Copper • Elgiloy®†

* Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

† Elgiloy is a trademark of Elgiloy Ltd. Partnership.

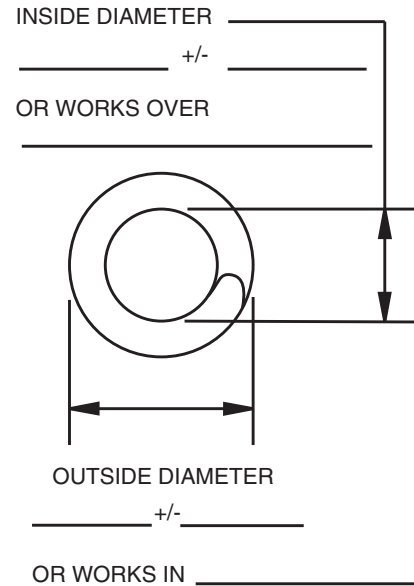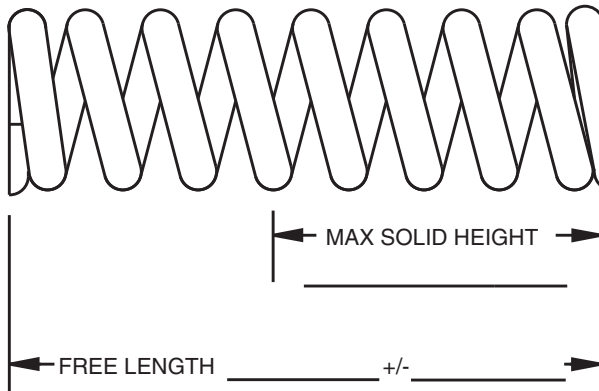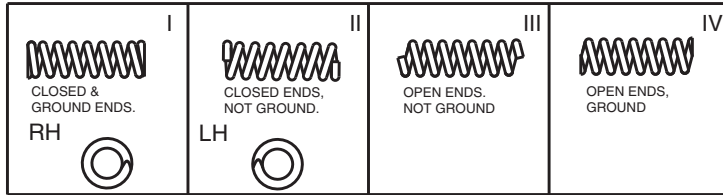

INDICATE UNITS OF MEASURE (IN. & LB.), (MM & KG)

- MATERIAL _____
- WIRE DIAMETER _____
- DIRECTION OF WIND OPT LH RH
- STYLE OF END I II III IV
- SQUARENESS _____
- RATE $\pm$ BETWEEN _____ & _____
- LOAD 1 $\pm$ @ _____
- LOAD 2 $\pm$ @ _____
- NUMBER OF ACTIVE COILS _____
- TOTAL NUMBER OF COILS _____
- FINISH _____
- FREQUENCY OF COMPRESSION
 _____ CYCLES/SEC. AND WORKING RANGE
 _____ IN. TO _____ IN. OF LENGTH
- OPERATING TEMP. _____ °F
- OTHER: _____

COMPANY: _____
ADDRESS: _____
CITY: _____
STATE: _____ ZIP: _____
CONTACT: _____
PHONE: _____
FAX: _____
EMAIL: _____
QUANTITIES TO BE QUOTED: _____
END USE OR APPLICATION: _____



Coned compression springs are often specified when the large end is meant to work in a hole and the small end is meant to work over a rod. They offer the advantage of a reduced solid height compared to straight compression springs particularly when designed to telescope.

Coned compression springs can be supplied with ground ends for improved squareness to further reduce solid heights.

Comprehensive Capabilities

Configurations:

- Closed Ends • Open Ends • Reduced Ends • Ground Ends
- Unground Ends • Eyelet • Double Spring
- Constant Pitch • Variable Pitch

Secondaries:

- Stress Relieve • Heat Treating • Passivation • Shot Peening
- Plating • Painting • Powder Coating • Grinding


Wire sizes from .004" through .625"

Materials:

- Carbon Steels • Alloy Steels
- Stainless Steel 17-7, 301, 302* and 316
- Phosphor Bronze
- Hastelloy • Inconel 600, 718 and x750
- Beryllium Copper • Elgiloy®†

* Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

† Elgiloy is a trademark of Elgiloy Ltd. Partnership.

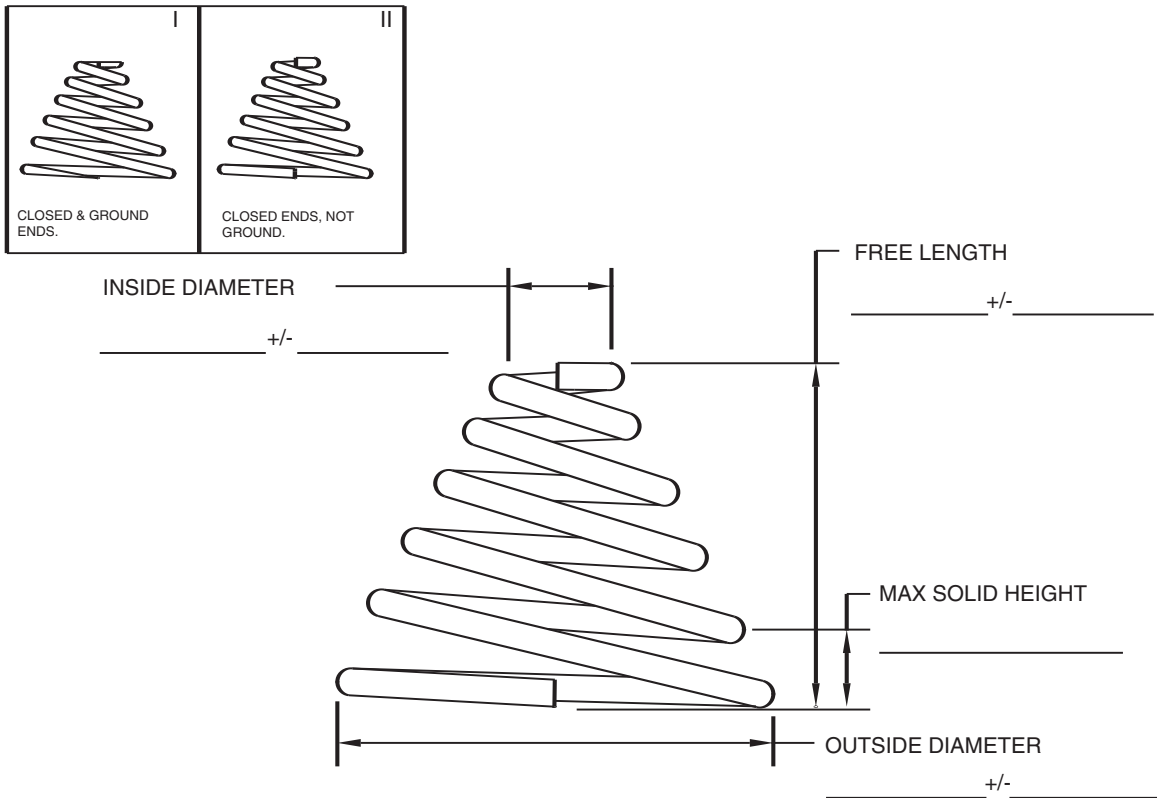

INDICATE UNITS OF MEASURE (IN. & LB.), (MM & KG)

1. MATERIAL _____
2. WIRE DIAMETER _____
3. DIRECTION OF WIND OPT LH RH
4. STYLE OF END I II
5. SQUARENESS _____
6. RATE _____ $\pm$ _____ BETWEEN _____ & _____
7. LOAD 1 _____ $\pm$ _____ @ _____
8. LOAD 2 _____ $\pm$ _____ @ _____
9. NUMBER OF ACTIVE COILS _____
10. TOTAL NUMBER OF COILS _____
11. FINISH _____
12. FREQUENCY OF COMPRESSION
 _____ CYCLES/SEC. AND WORKING RANGE
 _____ IN. TO _____ IN. OF LENGTH
13. OPERATING TEMP. _____ °F
14. OTHER: _____

COMPANY: _____

ADDRESS: _____

CITY: _____

STATE: _____ ZIP: _____

CONTACT: _____


PHONE: _____

FAX: _____

EMAIL: _____

QUANTITIES TO BE QUOTED: _____

END USE OR APPLICATION: _____

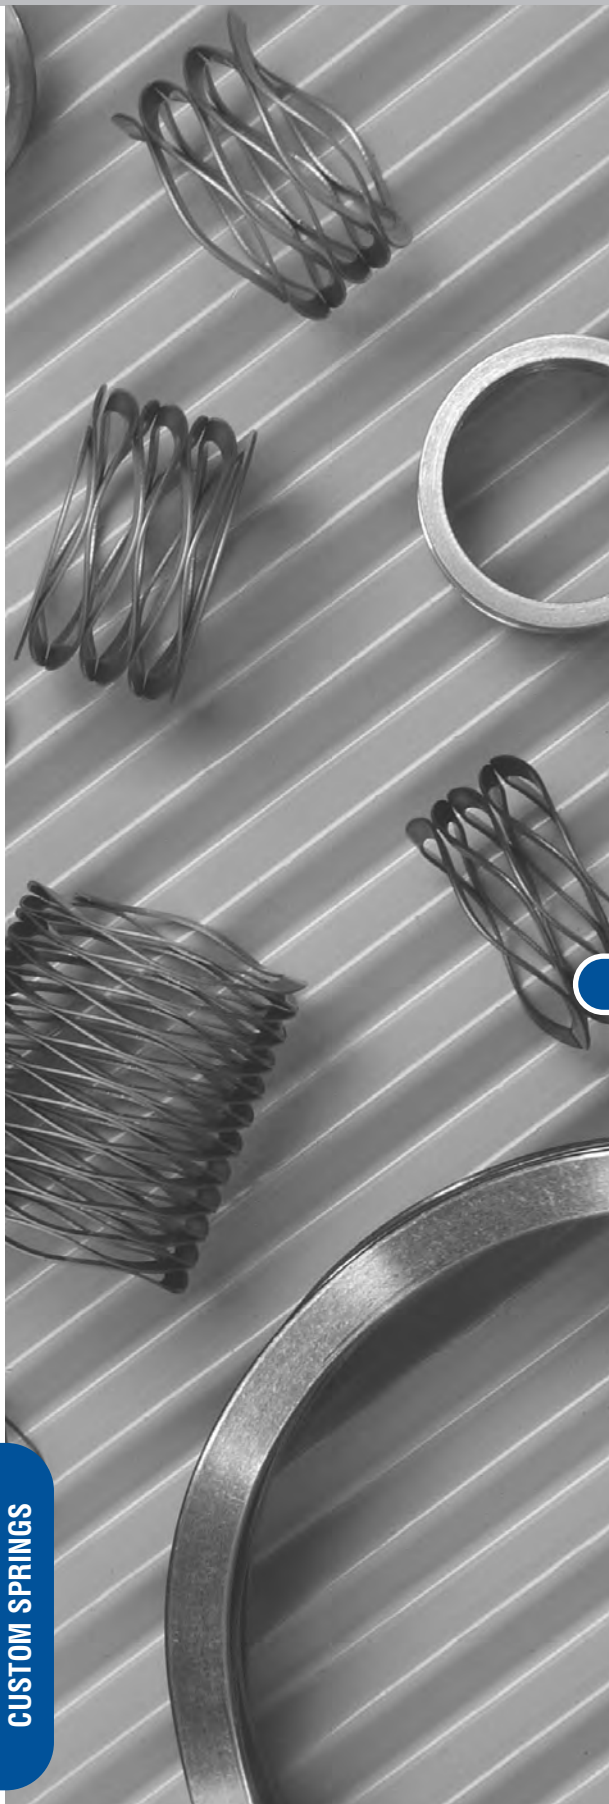

Wave Springs can be used in place of conventional round wire springs in space critical environments. Generally, they occupy thirty to fifty percent of the compressed height space of comparable round wire springs, offering equal deflections and load specifications.

Comprehensive Capabilities

Dimensions:


- Thickness Range .006" - .039"
- Radial Wall 0.024" - 0.230"
- Outside Diameter Range: .250" - 5.00"

Configurations:

- Regular (Wavy) • Flat (Shim) Ends

Materials:

- 17-7 Stainless Steel • Type 316 Stainless Steel • Carbon Steel

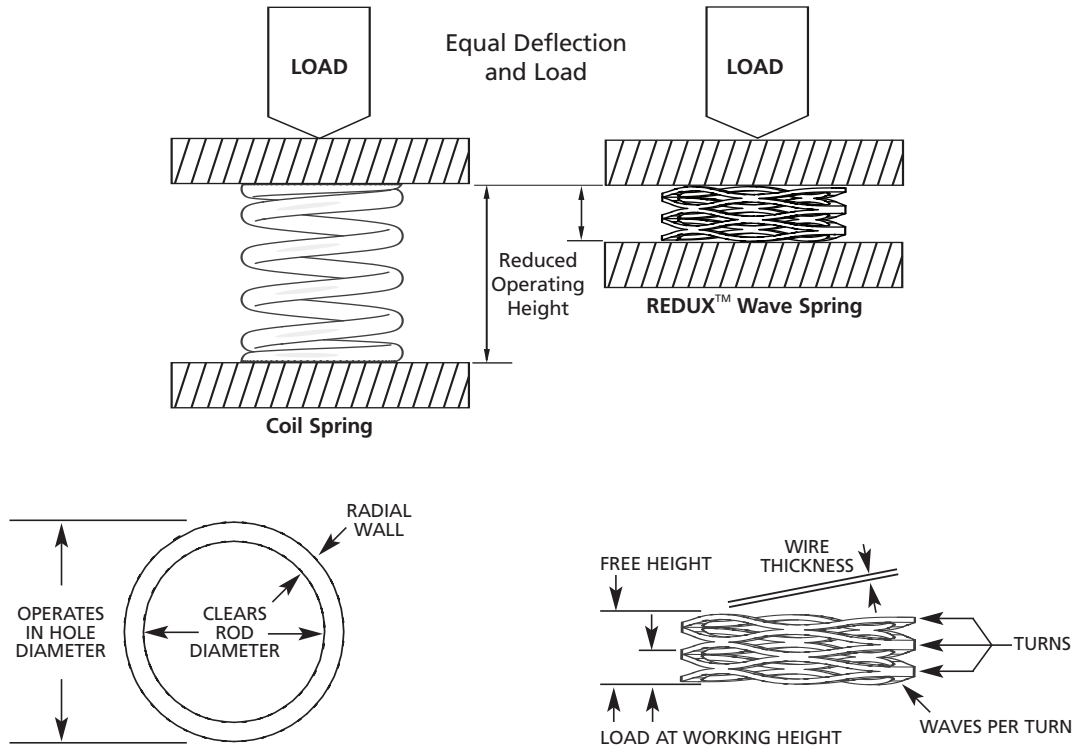

INDICATE UNITS OF MEASURE (IN. & LB.), (MM & KG)

1. MATERIAL _____
2. WIRE THICKNESS _____
3. RADIAL WALL _____
4. DIRECTION OF WIND OPT LH RH
OUTSIDE DIAMETER _____
INSIDE DIAMETER _____
5. FREE HEIGHT _____
6. RATE _____ +/- _____ BETWEEN _____ & _____
7. LOAD 1 _____ +/- _____ @ _____
8. LOAD 2 _____ +/- _____ @ _____
9. HOLE DIAMETER _____
10. ROD DIAMETER _____
11. NUMBER OF TURNS _____
12. WAVES PER TURN _____
13. SQUARENESS _____
14. FINISH _____
15. FREQUENCY OF COMPRESSION
_____ CYCLES/SEC. AND WORKING RANGE
_____ IN. TO _____ IN. OF LENGTH
16. OPERATING TEMP. _____ °F
17. OTHER: _____

COMPANY: _____

ADDRESS: _____

CITY: _____

STATE: _____ ZIP: _____

CONTACT: _____

PHONE: _____

FAX: _____

EMAIL: _____

QUANTITIES TO BE QUOTED: _____

END USE OR APPLICATION: _____





LeeP™ Plastic Composite Springs can be molded to exact customer specifications, with resulting tolerances exceeding those generally found in metal springs. Custom colors may be specified using the Pantone Matching System® (PMS) or other color systems. Although Lee Spring recommends Ultem* resins, we can produce Custom LeeP Springs in other plastic resins to meet application requirements.

Potential Applications

- Medical Products and Processing Equipment
- Pharmaceutical Delivery Devices
- Imaging and X-Ray Equipment
- Food Processing and Packaging Equipment
- Aerospace or Marine Products
- Electronics and Electrical Equipment
- Water Purification and Pollution Control Systems
- Chemical Environments
- Semi-conductors
- Instrumentation
- Communication Devices
- Cosmetics Packaging Equipment

*Trademark of SABIC Innovative Plastics IP BV.

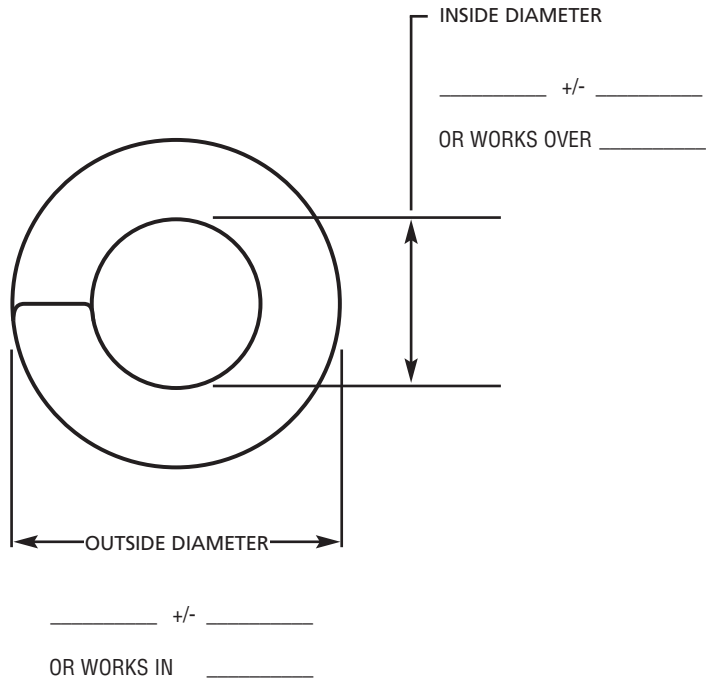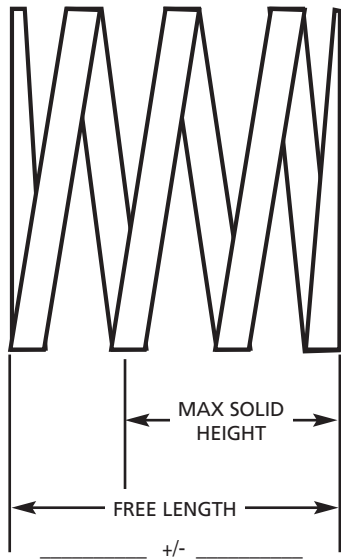
INDICATE UNITS OF MEASURE (IN. & LB.), (MM & KG)

1. MATERIAL _____
2. MATERIAL THICKNESS _____
3. RADIAL WALL _____
4. DIRECTION OF WIND OPT LH RH
OUTSIDE DIAMETER _____
INSIDE DIAMETER _____
5. FREE HEIGHT _____
6. RATE _____ +/- _____ BETWEEN _____ & _____
7. LOAD 1 _____ +/- _____ @ _____
8. LOAD 2 _____ +/- _____ @ _____
9. HOLE DIAMETER _____
10. ROD DIAMETER _____
11. NUMBER OF ACTIVE COILS _____
12. TOTAL NUMBER OF COILS _____
13. SQUARENESS _____
14. COLOR _____
15. FREQUENCY OF COMPRESSION
_____ CYCLES/SEC. AND WORKING RANGE
_____ IN. TO _____ IN. OF LENGTH
16. OPERATING TEMP. _____ °F
17. OTHER: _____

COMPANY: _____

ADDRESS: _____

CITY: _____

STATE: _____ ZIP: _____

CONTACT: _____

PHONE: _____

FAX: _____

EMAIL: _____

QUANTITIES TO BE QUOTED: _____

END USE OR APPLICATION: _____



Extension springs absorb and store energy as well as create a resistance to a pulling force. It is initial tension that determines how tightly together an extension spring is coiled. This initial tension can be manipulated to achieve the load requirements of a particular application.

Extension springs are often tightly wound in the free (no-load) position and have loops, hooks, eyes, or other interface geometry at the ends to attach to the components they connect. They are frequently used to provide return force to components that extend in the actuated position.

Comprehensive Capabilities

End Configurations:

- Machine (Twist) Loops • Crossover Center Loops
- Side Loops • Extended Hooks • Crossover Center Hooks
- Rectangular Ends • Teardrop Ends • Threaded Inserts

Secondaries:

- Stress Relieve • Heat Treating • Passivation • Plating
- Painting • Powder Coating

Wire sizes from .004" through .625"

Materials:

- Carbon Steels • Alloy Steels
- Stainless Steel 17-7, 301, 302* and 316
- Phosphor Bronze
- Hastelloy • Inconel 600, 718 and x750
- Beryllium Copper • Elgiloy®†



* Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

† Elgiloy is a trademark of Elgiloy Ltd. Partnership.

END STYLE	I MACHINE LOOPS	II CROSSOVER	III SIDE LOOPS	IV EXTENDED HOOKS
LOOP TYPE				
RECOMMENDED LOOP LENGTH:				
MIN	1/2 I.D.	I.D.	I.D.	1.1 x I.D.
MAX	1.1 x I.D.	I.D.	I.D.	AS REQUIRED

LOOP/HOOK **A** LENGTH _____ +/- _____ OPENING _____ +/- _____

LOOP/HOOK **B** LENGTH _____ +/- _____ OPENING _____ +/- _____

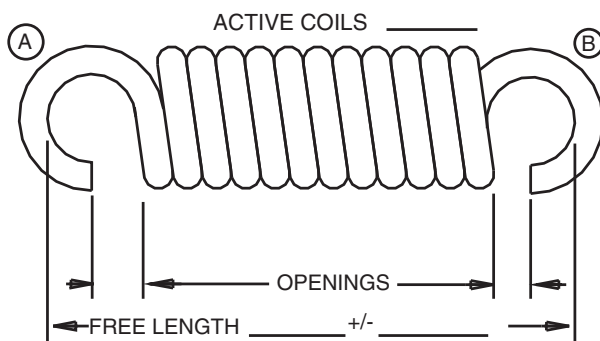

INDICATE UNITS OF MEASURE (IN. & LB.), (MM & KG)

1. MATERIAL _____

2. WIRE DIAMETER _____

3. DIRECTION OF WIND OPT LH RH

4. STYLE OF END **A** I II III IV

(See Above) **B** I II III IV

5. IT _____

6. RATE _____ +/- _____ BETWEEN _____ & _____

7. LOAD 1 _____ +/- _____ @ _____

8. LOAD 2 _____ +/- _____ @ _____

9. MAXIMUM EXTENDED LENGTH
(INSIDE ENDS) WITHOUT SET _____

10. RELATIVE LOOP POSITION:

_____ RANDOM OR _____

ALIGNED AT _____ DEGREES +/- _____ DEGREES

11. FINISH _____

12. FREQUENCY OF EXTENSION

_____ CYCLES/SEC. AND WORKING RANGE

_____ IN. TO _____ IN. OF LENGTH

13. OPERATING TEMP. _____ °F

14. OTHER: _____

COMPANY: _____

ADDRESS: _____

CITY: _____

STATE: _____ ZIP: _____

CONTACT: _____

PHONE: _____

FAX: _____

EMAIL: _____

QUANTITIES TO BE QUOTED: _____

END USE OR APPLICATION: _____



Coned Extension Springs or Conical End Reduced Extension Springs are made by coiling two or three or even four coils of the spring body gradually smaller in diameter.

As with straight-bodied extension springs, a wide variety of ends are available for Coned Extension Springs including machine (twist) loops, crossover center loops, side loops, threaded inserts, swivel hooks, and extended hooks. The most common configurations can be made in conjunction with the manufacture of the conical extension springs bodies.

Coned Extension Springs are best suited for heavy duty or high cycle applications. The hooks can be designed for extended life, as compared to standard extension springs of similar dimensions. Swivel hook configurations can be particularly advantageous in that the ends are free to rotate to assure alignment and reduce hook stress.

Comprehensive Capabilities

End Configurations:

- Machine (Twist) Loops • Crossover Center Loops
- Side Loops • Threaded Inserts • Regular Extended Hook
- Crossover Center Hooks • Swivel hooks

Secondaries:

- Stress Relieve • Heat Treating • Passivation
- Plating • Painting • Powder Coating




Wire sizes from .004" through .625"

Materials:

- Carbon Steels • Alloy Steels
- Stainless Steel 17-7, 301, 302* and 316 • Phosphor Bronze
- Hastelloy • Inconel 600, 718 and x750
- Beryllium Copper • Elgiloy®†

* Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

† Elgiloy is a trademark of Elgiloy Ltd. Partnership.

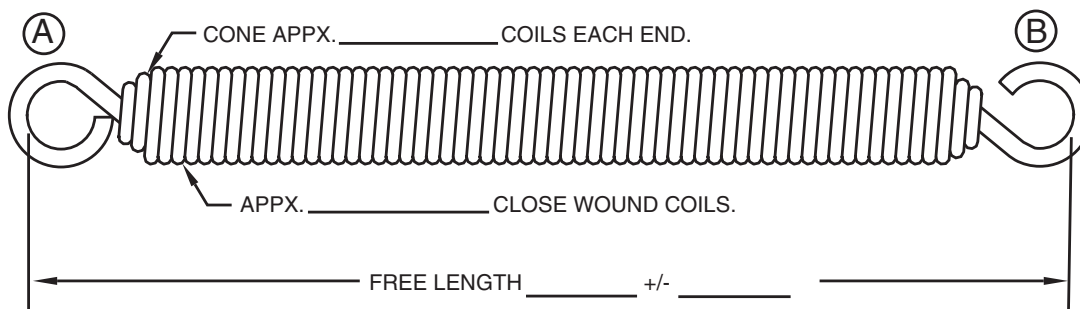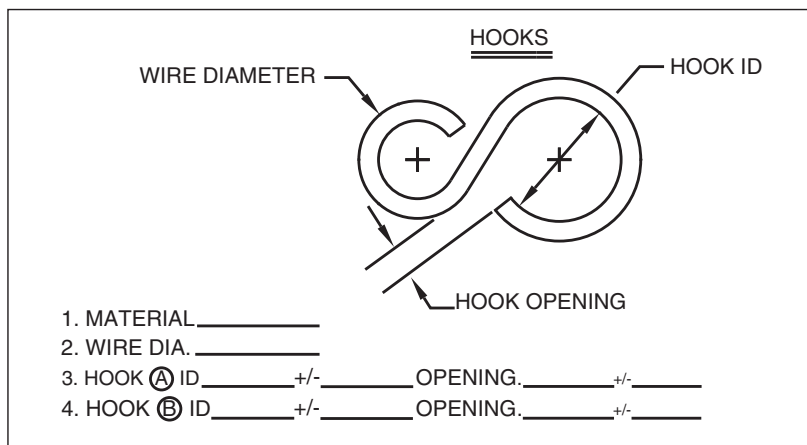

INDICATE UNITS OF MEASURE (IN. & LB.), (MM & KG)

1. MATERIAL _____
2. WIRE DIAMETER _____
3. DIRECTION OF WIND OPT LH RH
4. IT _____ +/- _____
5. RATE _____ +/- _____ BETWEEN _____ & _____
6. LOAD 1 _____ +/- _____ @ _____
7. LOAD 2 _____ +/- _____ @ _____
8. MAXIMUM EXTENDED LENGTH
(INSIDE ENDS) WITHOUT SET _____
9. FINISH _____
10. FREQUENCY OF EXTENSION
_____ CYCLES/SEC. AND WORKING RANGE
_____ IN. TO _____ IN. OF LENGTH
11. OPERATING TEMP. _____ °F
12. OTHER: _____

COMPANY: _____

ADDRESS: _____

CITY: _____

STATE: _____ ZIP: _____

CONTACT: _____

PHONE: _____

FAX: _____

EMAIL: _____

QUANTITIES TO BE QUOTED: _____

END USE OR APPLICATION: _____



Drawbar Springs are assemblies in which the main spring will compress as the drawbars extend under an applied load. They are often capable of withstanding loads far in excess of the compression springs closing force and should be considered in applications where a positive stop of overload protection is required. Because of the Drawbar Spring's unique characteristic as an extension spring with a fixed stop, potential overstretching is eliminated.

Comprehensive Capabilities

Configurations:

- Standard End • Strap End • Eyelet End • Enlarged End

Secondaries:

- Stress Relieve • Heat Treating • Passivation • Shot Peening
- Plating • Painting • Powder Coating

Wire sizes from .004" through .625"


Materials:

- Carbon Steels • Alloy Steels
- Stainless Steel 17-7, 301, 302* and 316
- Carbon Steel • Phosphor Bronze • Hastelloy
- Inconel 600, 718 and x750
- Beryllium Copper • Elgiloy®†

* Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

† Elgiloy is a trademark of Elgiloy Ltd. Partnership.

END STYLE

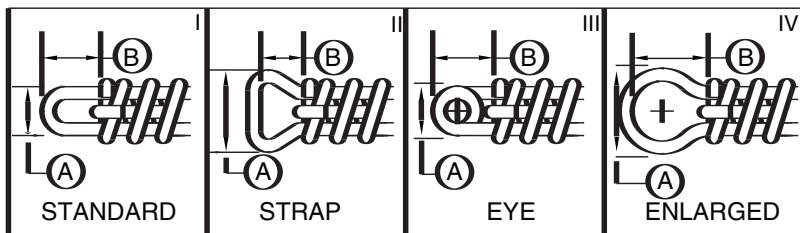

END ① I, II, III, IV


DIM. (A) _____ +/- _____

DIM. (B) _____ +/- _____

END ② I, II, III, IV

DIM. (A) _____ +/- _____

DIM. (B) _____ +/- _____

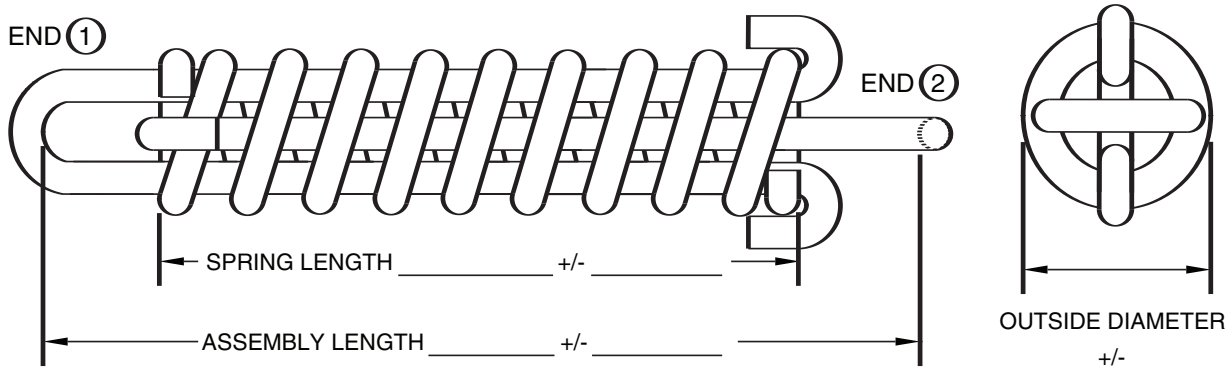

INDICATE UNITS OF MEASURE (IN. & LB.), (MM & KG)

1. (SPRING) MATERIAL _____ WIRE DIA. _____
2. (HOOK) MATERIAL _____ WIRE DIA. _____
3. RATE _____ +/- _____ BETWEEN _____ & _____
4. LOAD 1 _____ +/- _____ @ _____
5. LOAD 2 _____ +/- _____ @ _____
6. NUMBER OF ACTIVE COILS _____
7. TOTAL NUMBER OF COILS _____
8. FINISH _____
9. FREQUENCY OF COMPRESSION
_____ CYCLES/SEC. AND WORKING RANGE
_____ IN. TO _____ IN. OF LENGTH
10. OPERATING TEMP. _____ °F
11. OTHER: _____

COMPANY: _____

ADDRESS: _____

CITY: _____

STATE: _____ ZIP: _____

CONTACT: _____

PHONE: _____

FAX: _____

EMAIL: _____

QUANTITIES TO BE QUOTED: _____

END USE OR APPLICATION: _____



Torsion Springs are helical springs that exert a torque or rotary force. The ends of torsion springs are attached to other components, and when those components rotate around the center of the spring, the spring tries to push them back to their original position. Although the name implies otherwise, torsion springs are subjected to bending stress rather than torsional stress. They can store and release angular energy or statically hold a mechanism in place by deflecting the legs about the body centerline axis.

This type of spring is normally close wound but can have increased pitch to reduce friction between the coils. They offer resistance to twist or rotationally applied force. Depending on the application, torsion springs can be designed to work in a clockwise or counter-clockwise rotation, thus determining the direction of the wind.

Comprehensive Capabilities

Configurations:

- Straight Offset Legs • Short Hook Legs • Hinge Legs
- Straight Torsion Legs • Bent Legs • Double Torsion

Secondaries:

- Stress Relieve • Heat Treating • Passivation • Shot Peening
- Plating • Painting • Powder Coating

Wire sizes from .004" through .625"

Materials:

- Carbon Steels • Alloy Steels
- Stainless Steel 17-7, 301, 302* and 316 • Phosphor Bronze
- Hastelloy • Inconel 600, 718 and x750
- Beryllium Copper • Elgiloy®†



* Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.

† Elgiloy is a trademark of Elgiloy Ltd. Partnership.

TABLE 1

I  Straight Offset Ends	II  Short Hook Ends	III  Double Torsion
IV  Hinge Ends	V  Straight Torsion Ends	VI  Special Ends

TABLE 2

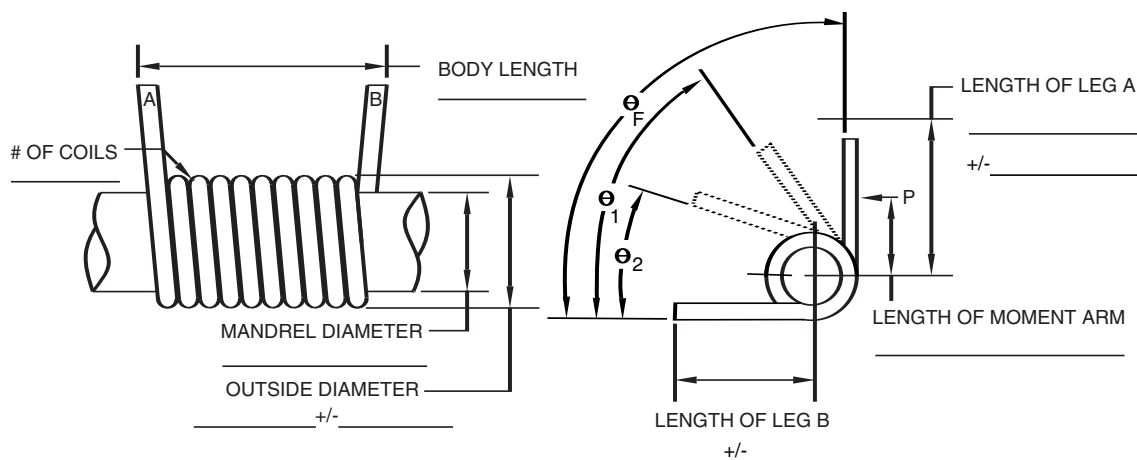

INDICATE UNITS OF MEASURE (IN. & LB.), (MM & KG)

- MATERIAL _____
- WIRE DIAMETER _____
- DIRECTION OF WIND LH RH (SEE TABLE 2)
- END STYLE (A) I II III IV V VI (SEE TABLE 1)
- STYLE OF END (B) I II III IV V VI (SEE TABLE 1)
- RATE _____ +/- _____ BETWEEN _____ PER TURN (360°)
- TORQUE 1 _____ +/- _____ AT $\ominus$ 1 _____ °
- TORQUE 2 _____ +/- _____ AT $\ominus$ 2 _____ °
- LENGTH OF SPACE AVAILABLE _____
- MAXIMUM WOUND POSITION _____ ° FROM FREE POSITION.
- $\ominus$ F _____ FREE ANGLE OR POSITION
- FINISH _____
- FREQUENCY OF ROTATION
_____ CYCLES/SEC. AND
WORKING RANGE $\ominus$ _____ ° TO $\ominus$ _____ ° DEFLECTION
- OPERATING TEMP. _____ °F
- OTHER: _____

COMPANY: _____

ADDRESS: _____

CITY: _____

STATE: _____ ZIP: _____

CONTACT: _____

PHONE: _____

FAX: _____

EMAIL: _____

QUANTITIES TO BE QUOTED: _____

END USE OR APPLICATION: _____



Constant force springs are a special variety of extension spring. They are tightly coiled wound bands of pre-hardened spring steel or stainless steel strip with built-in curvature so that each turn of the strip wraps tightly on its inner neighbor. When the strip is extended (deflected) the inherent stress resists the loading force, the same as a common extension spring, but at a nearly constant (zero) rate.

The constant-force spring is well suited to long extensions with no load build-up. In use, the spring is usually mounted with the ID tightly wrapped on a drum and the free end attached to the loading force, such as in a counterbalance application. This relationship can be reversed, however, with the free end mounted stationary and the spring itself providing the working force, as with carbon brushes in electrical apparatus. Considerable flexibility is possible with constant-force springs because the load capacity can be multiplied by using two or more strips in tandem, or back-to-back.

Comprehensive Capabilities

Ends:


- Holes • Hooks • T Ends • Separating Cut Ends

Wire thickness from .004" through .047"

Wire width from .110" through 1.97"

Materials:

- Stainless Steel 301 • Carbon Steel • Inconel®

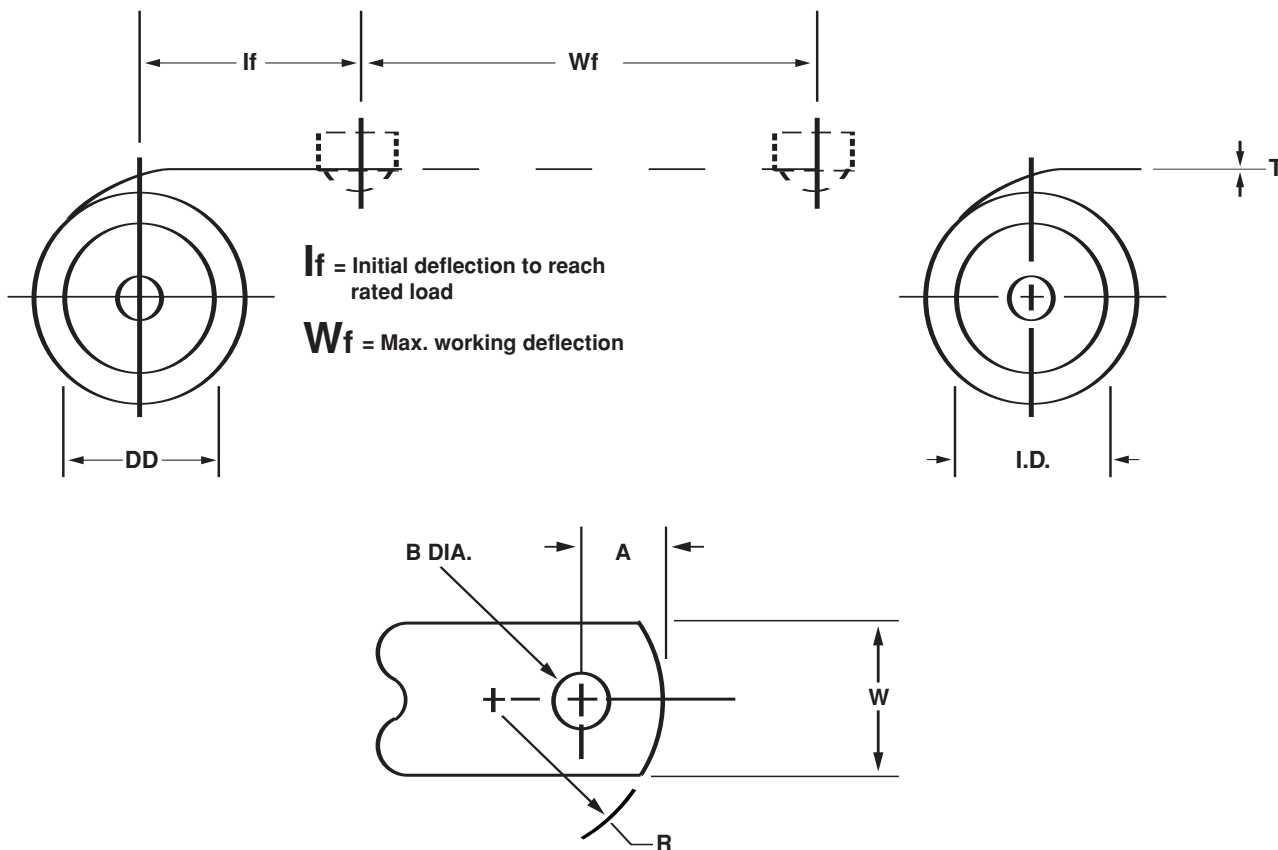

INDICATE UNITS OF MEASURE (IN. & LB.), (MM & KG)

1. MATERIAL _____
2. MATERIAL THICKNESS _____
3. MATERIAL WIDTH _____
4. LENGTH _____
5. INSIDE DIA _____
6. DRUM DIA _____
7. LOAD _____ +/- _____
 @ WORKING DEFLECTION _____
8. LIFE CYCLES _____
9. STANDARD END CONFIGURATION: (OTHER CONFIGURATIONS AVAILABLE UPON REQUEST)
 DIMENSION 'A' _____
 DIMENSION 'B' (DIA) _____
 END RADIUS 'R' _____
10. FINISH _____
11. OPERATING TEMP. _____ °F
12. OTHER: _____

COMPANY: _____
ADDRESS: _____

CITY: _____
STATE: _____ ZIP: _____
CONTACT: _____
PHONE: _____
FAX: _____
EMAIL: _____
QUANTITIES TO BE QUOTED: _____
END USE OR APPLICATION: _____



Lee Spring Company manufactures custom battery springs, as well as stamped and fourslide contacts to match your specifications.

Custom Battery Springs can be configured to meet custom specifications and materials. When designing Battery Springs, determine the contact location based on the American National Standards Institute (ANSI) and International Electrotechnical Commission (IEC) standard dimensions. Reference should be made to ANSI Standard C18 and IEC Standard IEC86.

Designs can be accommodated for a wide range of Battery sizes, beyond the commonly specified AA, AAA, C and D sizes.

Comprehensive Capabilities

Configurations:


- Interior Mount • Exterior Mount • Double Mount

Materials:


- Nickel Plated Carbon Steel • Beryllium Copper
- Silver Plated Beryllium Copper • Phosphor Bronze
- Stainless Steel 17-7, 301, 302* and 316

* Note: Type 302 may be substituted with Type 304 at Lee Spring's discretion.


SPRING TYPE (I)

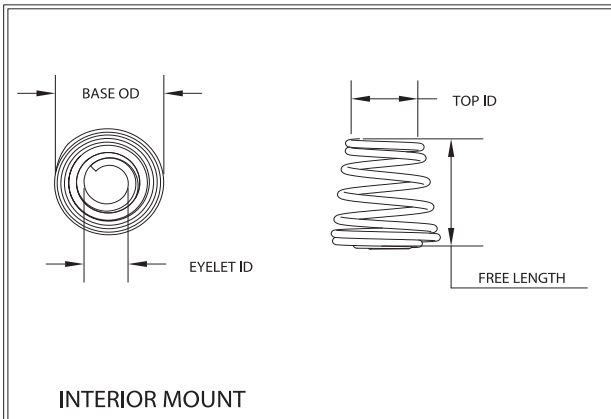


SPRING TYPE (II)

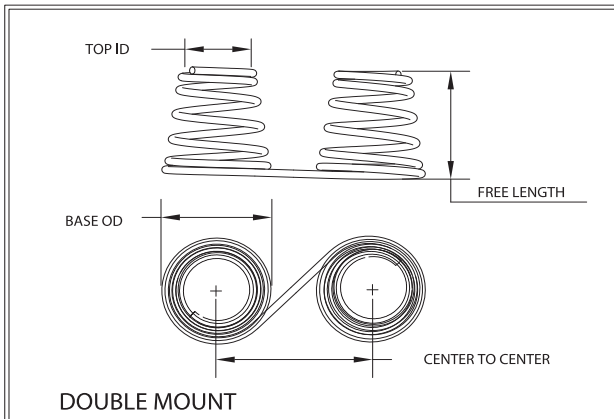

SPRING TYPE (III)

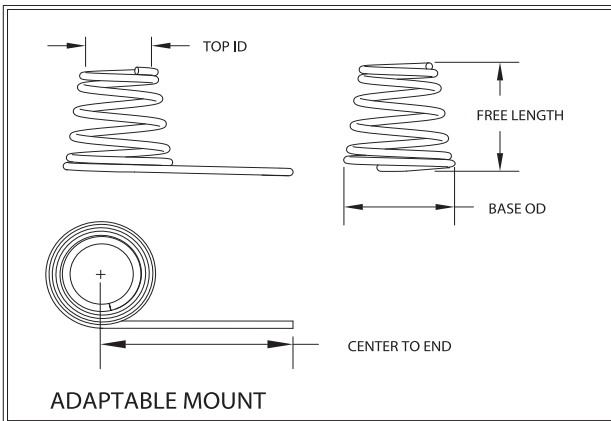

SPRING TYPE (IV)

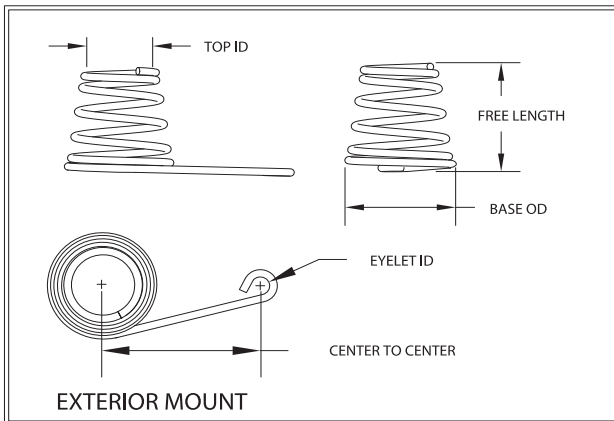

INDICATE UNITS OF MEASURE (IN. & LB.), (MM & KG)

1. **SPRING TYPE** I ☐ II ☐ III ☐ IV ☐
2. **BATTERY TYPE** AA ☐ AAA ☐ C ☐ D ☐
3. **MATERIAL** _____
4. **WIRE DIAMETER** _____
5. **BASE OD** _____ +/- _____
6. **TOP ID** _____ +/- _____
7. **FREE LENGTH** _____ +/- _____
8. **CENTER TO CENTER/END** _____ +/- _____
9. **EYELET ID** _____ +/- _____
10. **NUMBER OF ACTIVE COILS** _____
11. **TOTAL NUMBER OF COILS** _____
12. **APPROX. LOAD** _____ @ _____
13. **FINISH** _____

COMPANY: _____

ADDRESS: _____

CITY: _____

STATE: _____ ZIP: _____

CONTACT: _____

PHONE: _____

FAX: _____

EMAIL: _____

QUANTITIES TO BE QUOTED: _____

END USE OR APPLICATION: _____




Belleville washers, also known as Belleville Springs, are a type of non-flat washer. They have a slight conical shape which gives the washer a spring characteristic. Belleville washers are typically used as springs when the application requires a high load in a small space. They are also used to apply a pre-load or flexible quality to a bolted joint. They may also be used as locking devices, but only in applications with low dynamic loads, such as down-tube shifters for bicycles. Belleville washers are seen on Formula One racing cars, as they provide extremely detailed tuning ability.

Multiple Belleville washers may be stacked to modify the spring constant or amount of deflection. Stacking in the same direction will add the spring constant in parallel, creating a stiffer joint (with the same deflection). Stacking in an alternating direction is the same as adding springs in series, resulting in a lower spring constant and greater deflection. Mixing and matching directions allow a specific spring constant and deflection capacity to be designed.

Comprehensive Capabilities

Materials:

- 1075 Carbon Steel • 1095 Carbon Steel
- Type 301 Stainless Steel • Type 316 Stainless Steel
- 17-7 Stainless Steel

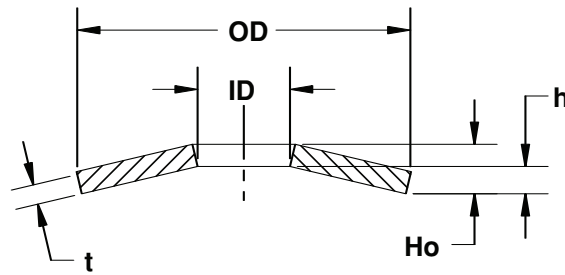
ARRANGEMENT TYPE

A. Single Disk	B. Parallel	C. Series	D. Series-Parallel
Load: _____	Disks: _____ Load: _____	Disks: _____ Load: _____	Disks in Series: _____ Disks in Parallel: _____ Load: _____
@ ☐ Deflection ☐ Flat	@ ☐ Deflection ☐ Flat	@ ☐ Deflection ☐ Flat	@ ☐ Deflection ☐ Flat

INDICATE UNITS OF MEASURE (IN. & LB.), (MM & KG)

- MATERIAL _____
- THICKNESS (t) _____
- OD _____ +/- _____ OR WORKS IN _____
- ID _____ +/- _____ OR WORKS OVER _____
- HEIGHT (Ho) _____ +/- _____
- (h) _____
- (h/t) _____
- ARRANGEMENT TYPE A ☐ B ☐ C ☐ D ☐
- STACK HEIGHT _____
- OPERATING TEMP. _____ °F
- FINISH _____
- OTHER: _____

COMPANY: _____

ADDRESS: _____

CITY: _____

STATE: _____ ZIP: _____

CONTACT: _____

PHONE: _____

FAX: _____

EMAIL: _____

QUANTITIES TO BE QUOTED: _____

END USE OR APPLICATION: _____

Lee Spring Bends Over Backward – and Sideways and Any Way We Can – to Meet Your Wire Form Requirements.

Most springs have a helix or spiral shape consisting of a group of coils while wire forms normally do not. Wire Forms typically are parts made from wire that is bent to have specific angles and lengths. “Spring” is our last name but our extensive experience and comprehensive custom capabilities extend to Wire Forms, Stampings and Fourslide Parts.

Design Engineering

Lee Spring’s World-Class Engineering Team will apply their expertise to assisting you with your Wire Form needs from conception and throughout the design and manufacturing process.

Prototyping

The cost of creating wire form prototypes has considerably decreased thanks to advances in CNC manufacturing technology. Lee Spring’s Engineering Team will work with you to ensure that your wire form parts meet your spatial requirements. We can produce prototypes as part of our concurrent design process. Frequently, prototypes can be changed and produced in minutes, saving time and costly design errors.

Stress-Relieving

Wire forms often are stress-relieved during production. This helps ensure that a part’s dimensions remain within required tolerances. Stress relieving streamlines the overall manufacturing process, lowers total production costs and helps ensure the component’s reliability.

Material Shapes

Lee Spring produces custom wire forms manufactured to your exact specifications. We can produce wire forms out of almost any material shape, including:

- Rolled Round
- Flattened Round
- Rectangular
- Shaped

Dimensional Parameters

Wire Diameters:

.010” – .236” / .254 mm – 6 mm

Maximum Finished Length:

60.0”/ 1524 mm



Stampings – High Quality and High Value in Any Quantity.

Lee Spring is uniquely positioned to provide expert design and production capabilities for all stamping processes. Our experience with materials commonly used in mechanical springs makes us the smart choice for:

- **Product Design** –
e.g., Beam Springs, Belleville Washers, Wave Washers, etc.
- **Stamping Process Design** –
e.g., Tooling Design, Press Operations, SPC
- **Secondary Process Design** –
e.g., Heat Treatment, Deburring, Plating, Passivation
- **Product Measurement and Testing** –
e.g. Materials Testing, Load Testing

Customer Support and Manufacturing Capabilities

- CAD assisted Product Design (SolidWorks)
- Short Run and Prototype Production
- CAD assisted Tooling Design (CADKEY), including Progressive Dies
- In-House Tooling Production, including Wire EDM
- Automatic Stamping Presses up to 45 Tons
- In-House Secondary Operations including CNC Machining, Vibratory Deburring, Painting, Welding & Assembly
- Process Validation Procedures including 1st Articles and PPAP's
- Extensive Network of Approved Suppliers (Raw Materials, Special Processes and Production Components)

Materials

For springs or other applications, Lee Spring can provide stampings from a variety of both ferrous and non-ferrous metals, including:

- Low Carbon Steel, Annealed • Low Carbon Steel, Hard Drawn
- High Carbon Steel, Oil Tempered • Chrome Silicon, Oil Tempered
- Chrome Vanadium, Oil Tempered
- Beryllium Copper • Elgiloy®* • Hastelloy • Inconel 600, 718 & X750
- Phosphor Bronze • Brass
- Stainless Steel, Series 300
- Stainless Steel, Series 400
- Stainless Steel, Type 17-7

* Elgiloy is a trademark of Elgiloy Ltd. Partnership.



CUSTOM SPRINGS

Dimensional Parameters

Strip Width:

up to 3" / 76.2 mm

Strip Thickness:

0.005 to 0.062" / .127mm -1.57 mm

Fourslide Parts – A Simple Solution to Complex Stampings.

Lee Spring can reduce part cost, accelerate product delivery, and streamline quality assurance with an integrated stamping and forming operation called fourslide. Fourslide production has low to moderate tooling costs and produces accurate repeatable parts. If you use flat springs, brackets, clips, flat terminals, or any stamped and formed metal components your parts may be natural candidates for fourslide. We can custom tool your intricate metal parts from flat strip material or from drawn or rolled wire.

What is a Fourslide Part?

A fourslide, also known as a four-slide, multislide, multi-slide, or four-way, is a metalworking machine tool used in the high-volume manufacture of small stamped components from strip or wire stock. The press is most simply described as a horizontal stamping press that uses cams to control tool motions. The machine is used as an alternative to progressive or transfer stamping operations.

What is the Fourslide Advantage?

The greatest advantage of the fourslide machine is its ability to complete all of the forming operations required to produce a part from start to finish economically. It can handle certain parts that transfer or progressive dies cannot, since it can manipulate from four axes. Because this process requires less machinery, setups, and handling, the cost of the finished part is reduced.

Lee Spring produces our own quality tooling, minimizing downtime. A fourslide machine can usually produce 1000 to over 4000 finished parts per hour, depending on the number of operations per part; this speed also will generally result in a lower cost per part.

Materials

The application of fourslides is usually limited by the material stock formability rather than the machine capabilities. Usually the formed characteristics and bending radii are the most limiting factors. The most commonly used materials are:

- Low-Carbon or High-Carbon Cold Rolled Steel
- Type 300 and 400 Stainless Spring Steels
- Copper Alloys including Beryllium-Copper
- Bronze Alloys, including Phosphor Bronze

Dimensional Parameters

Strip Width:

.010" - .500" / .254 mm – 12.70 mm

Strip Thickness:

.003" - .125" / .076 mm – 3.175 mm

Wire Diameter:

.005" - .187" / .127 mm – 4.750 mm



Benefit from the Lee Spring Difference!

Over
19,000
Stock Springs

Lee Spring's Stock Springs, come packed with all these extras—

AT NO ADDITIONAL CHARGE!

**Fortified
for
Performance!**

FREE Standard Ground Shipping in the Continental United States

FREE Plating on all Music Wire Stock Springs

FREE Grinding on all Standard Stock Compression Springs

FREE Passivation on 302, 316 & 17-7 Stainless Steel Stock Springs

Expert Engineering Assistance on Stock Springs and Custom Springs

Certificate of Compliance on all Stock Springs and Custom Springs

Guaranteed RoHS Compliance on all Stock Springs

Live Customer Service Support at all locations

Comprehensive Website with on-line ordering

Enhanced CAD Downloads on Stock Spring designs

Lee Spring makes designing easier than ever!

With our Solid Gold CAD Support System, you can view, manipulate and download images of Lee Spring designs. It's quick, it's easy and it's free!

Lee Spring's Solid Gold 3D CAD works with:

- Autocad
 - Solidworks
 - Inventor
 - ProE
- Plus over 40 popular CAD platforms



Available exclusively at
www.leespring.com





Lee Spring®

leespring.com

Please use your customer number when contacting Lee Spring

BOUND PRINTED
MATTER
LARGE
PAID
RIPON WI
PERMIT NO. 100

FOUR SIMPLE WAYS TO ORDER:

(UNITED STATES AND CANADA)

CALL: 888-SPRINGS (888-777-4647) • **FAX:** 888-426-6655
EMAIL: sales@leespring.com • **VISIT:** www.leespring.com



GLOBAL HEADQUARTERS

140 58th Street, Brooklyn, NY 11220

1-888-SPRINGS (1-888-777-4647) • sales@leespring.com

U.S. LOCATIONS

ARIZONA

1235 North Hobson St.
Gilbert, AZ 85233

CONNECTICUT

245 Lake Ave.
Bristol, CT 06010

MISSOURI

1334 Charlestown Ind. Dr.
St. Charles, MO 63303

NEW YORK

140 58th St.
Brooklyn, NY 11220

NORTH CAROLINA

104 Industrial Ave.
Greensboro, NC 27406

INTERNATIONAL LOCATIONS

ASIA

Lee Spring (Suzhou) Co., Ltd.
2nd Floor, Building 1
15 Dong Hong Road, Suzhou Industrial Park
Suzhou, Jiangsu China, 215123
Phone: (011) 86 512 6706 7227
(011) 86 512 6706 7228
Fax: (011) 86 512 6706 7225
Email: sales@leespring.cn

EUROPE

Lee Spring Limited
Latimer Road
Wokingham, Berkshire,
RG41 2WA, England
Phone: (011) 44 118 978 1800
Fax: (011) 44 118 977 4832
Email: sales@leespring.co.uk

MEXICO AND LATIN AMERICA

Lee Spring de México
Ave. Apolo 519, Edificio 22
Parque Industrial Kalos del Poniente
Santa Catarina, N.L. 66367
Phone: (01) 800 590 0717 (Mexico)
(011) 52 818 308 7070
Fax: (011) 52 818 308 7080
Email: ventas@leespring.com

www.leespring.com

Not just a better spring, a better spring company.

Copyright ©2011 Lee Spring Company