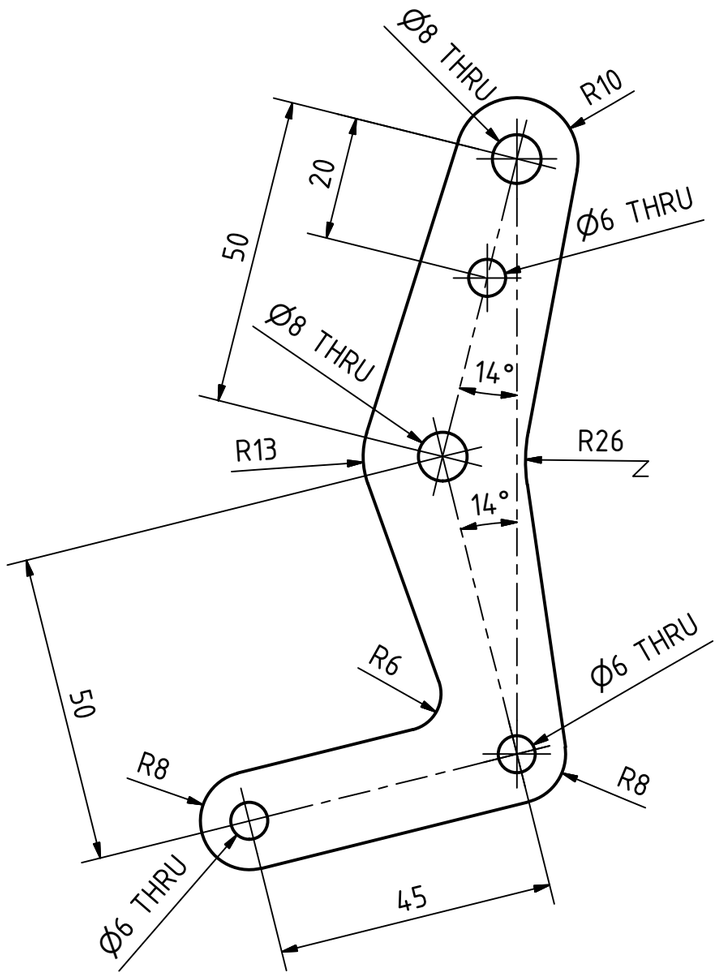

Thickness: 2,5mm

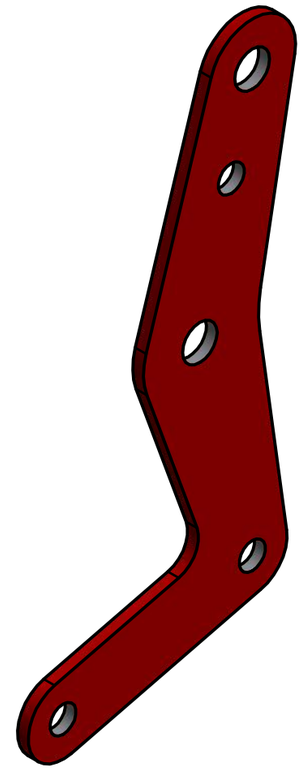

Break Sharp Edges: 0,1 mm

Revision	Date	Description

Engineered by:		Name:	Date:	Scale: 1:1
Galba, J.	Designer:	Galba, J.	11/02/2012	SheetSize: A3
	Approved:	Galba, J.	11/02/2012	

Project: P0007
Tooling

Material: Steel, Mild
Total Mass: 0,059 kg

Title:
Manual Clamp: range 0 - 75mm
000.001 Clamp Base

Corresponding symbols		▽	▼	▽▽	▼▼	▽▽▽	▼▼▼	
Roughness Classes (NBN 88-02) (ISO 1302)	N11	N10	N9	N8	N7	N6	N5	N4
Roughness Value "Ra" in µm (NBN 88-02) (ISO 1302)	25	12,5	6,3	3,2	1,6	0,8	0,4	0,2

Allowable deviations for dimensions without tolerance indication (machined surfaces)

	For measurements (deviations in mm)								Fillets and chamfers					Angles (in ° and ')				
	Dimensions in mm								Dimensions in mm					Length of the shortest leg				
Accuracyclass (ISO 2768.1)	0,5 to 3	>3 to 6	>6 to 30	>30 to 120	>120 to 400	>400 to 1000	>1000 to 2000	>2000 to 4000	0,5 to 3	>3 to 6	>6 to 30	>30 to 120	>120 to 400	to 10	>10 to 50	>50 to 120	>120 to 400	above 400
f Fine	±0,05	±0,05	±0,1	±0,15	±0,2	±0,3	±0,5	±0,8	±0,2	±0,5	±1	±2	±4	±1°	±30'	±20'	±10'	±5'
m Medium	±0,1	±0,1	±0,2	±0,3	±0,5	±0,8	±1,2	±2										
c Rough	±0,2	±0,3	±0,5	±0,8	±1,2	±2	±3	±4	±0,4	±1	±2	±4	±8	±1°30'	±1°	±30'	±15'	±10'
v Very Rough	-	±0,5	±1	±1,5	±2,5	±4	±6	±8						±3°	±2°	±1°	±30'	±20'

InventorWizard.be/nl

Drawingnumber:
P0007-000.001

Sheet:
0001

Design State:
Released

Drawing made with autodesk Inventor Revisions only permitted by CAD

This document is for educational purposes only and property of Inventor Wizard.
It shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.